Hallowel

A TRADITION OF QUALITY SINCE 1903

COMPLETE STORAGE SOLUTIONS FULL-LINE CATALOG





8 8

WWW.HALLOWELL-LIST.COM



MADE IN AMERICA



Hallowell-List





THE INDUSTRY'S LARGEST INVENTORY

- Six fully-stocked regional distribution centers.
- Over 4,000 different SKUs to choose from in stock.
- Large inventory covers of best solvers.

ALL LOCKERS & CABINETS ARE AVAILABLE TO SHIP KNOCK DOWN OR FULLY-ASSEMBLED

WHY HALLOWELL

- Lockers and cabinets are assembled by trained and highly skilled trade professionals.
- Lockers and cabinets arrive ready to anchor, saving you time and money.

OUR STEEL

 Most of our steel is purchased directly from US mills and is made of 30% post consumer recycled content and 11.3% post industrial/pre-consumer content.

OUR PAINT

- Sherwin Williams powders are made in the USA insuring no harmful materials.
- Hammertone textured finishes are available for all 24 standard colors.
- Medsafe[®] antimicrobial finishes with Microban[®] are available for all 24 colors.



WE ARE GREENGUARD GOLD CERTIFIED

- Hallowell is committed to producing environmentally friendly products and protecting indoor air quality.
- GREENGUARD Gold Certification establishes strict chemical emission standards for products intended for use in environments where children and others work, play or reside.
- All metal products are GREENGUARD GOLD certified.



INDUSTRY-LEADING CUSTOMER SERVICE

- A dedicated team of in-house trained professionals is ready to respond to inquiries related to product features, availability, specifications, order status and shipping information.
- All personnel are trained in every aspect of our Quick Ship program.

Since 1903, every Hallowell component has been designed and manufactured with the concept that the highest quality product is crucial for success.

OUR HISTORY

Hallowell was acquired by List Industries Inc. in 1992. List Industries was founded in 1936 with the idea that customer satisfaction and product quality would be the basis for success. This philosophy has been maintained for over 80 years by the three Presidents of List Industries Inc.: founder Max H. List, his son Herb List and his grandson and current President, Herb List, Jr. As an innovator and industry leader in product design and development, List Industries Inc. has and will continue to uphold Hallowell's tradition of quality and exceptional customer service.



MANUFACTURING

Hallowell Products are fabricated in three state-of-the-art manufacturing facilities located

in Central and South Florida. Our Deerfield Beach corporate headquarters is a highly efficient manufacturing plant located in one of South Florida's premier office parks. Computer controlled fabrication, roll-forming equipment and the newest powder coating paint technology assure consistent quality workmanship. In addition to our primary manufacturing facility, we also have a second plant in a prestigious industrial park in Central Florida that more than doubles our manufacturing square footage. Our newest Florida location, produces our new line of all-wood Recruiter sport lockers and wardrobe Club lockers.

MADE-TO-ORDER PRODUCTS

In addition to Hallowell's industry leading variety of in-stock lockers, shelving and cabinets, we also offer an extensive line of production items. Hallowell's complete line of production lockers can be manufactured in short lead-times and painted in one of our standard designer powder coat colors. If a high-rise shelving system is what you require, our team of design engineers and sales professionals is

VISIT OUR WEBSITE: www.Hallowell-List.com FOR MORE INFORMATION

eager to assist you.

TABLE OF CONTENTS

- 2 Why Hallowell - Company Spotlight
- **Quick-Ship Program & Distribution Centers** 4

SHELVING

6

7

8

9

10

11

12

13

15

17

- **Rivetwell Boltless Shelving** Components Unit Growth Chart Single Rivet Units **Double Rivet Units Record Storage Units** Automotive Storage Racks Components Decking **Technical Data Rivetwell High Capacity Boltless Shelving**
- 18
- 19 **High Capacity Bolted Die Rack**
- 20 **Hi-Tech Clip Shelving**
- 22 **Open Units**
- 23 **Closed Units**
- 24 Free Standing Open and Closed Units
- 25 Medsafe Antimicrobial Finish Shelving
- 26 Bin Units
- 27 **Deep Bin Units**
- 28 **H-Post Shelving**
- 32 **DuraTech Pass-Thru Shelving**
- 34 Components
- 38 **Component Specifications**
- Multi-Level High Rise Shelving Systems 40
- 42 Growth & Technical Data
- 44 **Bulk Rack**
- 47 **Reel Rack**
- 48 **Bin Shelving**
- 49 **Portable Gates**
- 50 **Guardrail & Post Protectors**

CABINETS

- 51 **Slimline Cabinets**
- 52 **400-Series Commercial Grade Cabinets**
- 54 **800-Series Industrial Grade Cabinets**
- **DuraTough All-Welded Cabinets** 56
- **WORKBENCHES**
- **Workbenches** 60
- 61 Fort Knox Modular Storage System



CALL 866-566-0500 FOR MORE INFORMATION ON OUR QUICK-SHIP PROGRAM

LOCKERS: QUICK-SHIP

- 66 Premium Wardrobe Lockers
- 68 Premium Box Lockers
- 70 Ready-Built Lockers
- 72 Ready-Built II Lockers
- Medsafe Antimicrobial Lockers 74
- 75 ValueMax Lockers
- 76 Maintenance-Free Quiet KD Lockers
- 78 DigiTech Electronic Day Use Lockers
- 80 Safety-View See-Thru Door Panels
- 81 Safety-View Plus See-Thru Doors
- **Digitech Safety-View Plus**
- Heavy-Duty Ventilated Lockers
- Locker Accessories
- Wood/Metal Hybrid Lockers
- 90 Wood Club Lockers
- 92 **Recruiter Wood Sport Lockers**
- **Galvanite Rust Resistant Lockers**
- Aquamax Solid Plastic Lockers
- Medsafe Aquamax Antimicrobial Solid Plastic Lockers
- Versamax Solid Phenolic Lockers
- Stainless Steel Lockers
- Kid Lockers
- Home Team Lockers
- Cubix Modular Box Lockers
- Cell Phone/Tablet Lockers
- 104
- Backpack/Laptop Lockers
- Turn-out Gear Emergency Response Lockers 106
- 108 **Uniform Exchange Lockers**
- 110 MaxView Heavy Equipment Storage
- All-Welded Single-Point All-Welded Ventilated 111
- Task-Force XP Emergency Response Lockers 112
- **Rookie KD Gear Stock Lockers** 114
- 115 TA-50 Military Gear Storage Lockers
- 116 SecurityMax All-Welded High Security Lockers
- Black Tie Office Space Commercial Lockers 117
- PE/Gym All-Welded Stock Lockers 118
- 120 24/7 Parcel Lockers
- 122 Bulk Storage Lockers (BSL)

LOCKERS: PRODUCTION (NON-STOCK)

- **Recruiter Custom Wood Lockers** 124
- 126 Metal Cubbies
- **Open-Front All-Welded Gear Lockers** 127
- 128 Unibody All-Welded Lockers
- **Equipment & Premium Lockers** 131
- 132 Premium KD Box & Specialty Lockers
- 134 Heavy-Duty Corridor Lockers (HDC)
- 134 Heavy-Duty Ventilated Lockers (HDV)
- 135 Locker Accessories
- Locks 136
- **Bench Tops & Pedestals** 137
- 138 Phenolic & Plastic Color Chart
- 139 Color Selector for Production (non-stock) lockers










HALLOWELL TABLE OF CONTENTS

J



Hallowe Hallowell-List.com






0

ADVANTAGES OF NATIONWIDE DISTRIBUTION CENTERS

- REDUCES FREIGHT COST REDUCES TRANSIT TIME
- MINIMIZES CARRIER HANDLING

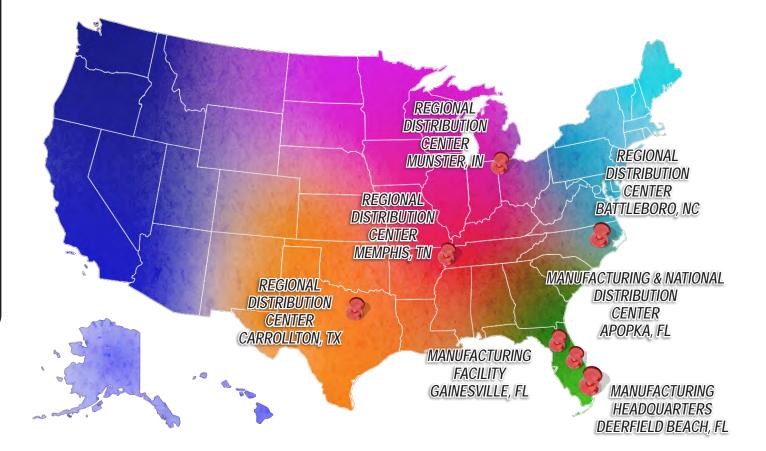

QUICK-SHIP BENEFITS



NO SETUP CHARGES NO MINIMUM ORDER QUANTITY INDUSTRY'S BEST DISCOUNT

CALL 866-566-0500 FOR MORE INFORMATION ON OUR QUICK-SHIP PROGRAM



THE FASTEST SHIPPING WITH THE MOST SECURE PACKAGING

In an industry where damage in transit can be difficult to prevent, Hallowell goes the extra mile to ensure your purchase is protected by providing the industry's best packaging materials and techniques.



1. Pallet is sized to fit unit with no overhang and with bottom protection

2. Full height corner guards and Top cap are added.



3. Outside faces are protected.

4. Extra packing is added to protect handles when projecting and the units are wrapped with poly wrap and double strapped in two directions to ensure stability.

KNOCK-DOWN SHIPMENTS

- All components are packaged in custom designed corrugated cartons.
- Pallets are sized so that no material overhangs the pallet.
- All cartons are securely strapped to pallets.

FULLY-ASSEMBLED SHIPMENTS

- Pallets are sized so that no part of a unit overhangs the pallet.
- When two units share a pallet, the inward facing locker fronts are separated by corrugated spacers.
- Locker tops and bottoms are protected by specially designed capping cartons.
- Outside corners are protected with heavy-duty full height corner guards.
- Perimeter surfaces are protected with full height corrugated sheets.
- Locker fronts always face the center of a pallet when possible.
- Units are wrapped with Heavy-gauge clear poly wrap.
- Units are double strapped in two directions to ensure maximum stability.



Palletized Assembled Lockers



Palletized Assembled Cabinets



Palletized BSL



Palletized Knock-Down Lockers



Palletized Shelving (Stock)



RIVETWELL BOLTLESS SHELVING



Boltless shelving is designed to maximize storage space and minimize installation set-up time.

All components are engineered to attach snugly to one another without the use of loose fasteners. This unique design has rivets which are factory attached to all left-to-right and front-to-back beams. The rivets align with keyhole slots in the vertical posts. Once tapped into place using a standard rubber mallet, the units are tightly assembled to provide maximum strength.

Standard units consist of vertical angle posts at the corners, double rivet angle beams at the top and bottom perimeter and single rivet angle beams running left-to-right only at the intermediate levels. Shelves are of standard 5/8" particle board, EZ-Deck steel or wire decking and simply drop into place. Shelf strength can be increased by upgrading to heavy duty beams, adding single rivet beams running front-to-back at the intermediate levels, upgrading to double rivet beams at the full perimeter of the intermediate levels or upgrading all levels to our strongest double rivet channel beams. Optional center supports can be added using supplied hardware to increase decking capacity.

The versatility of our Rivetwell boltless shelving system allows you to mix and match components to meet your unique application. From standard storage applications, and record storage to automotive tire racks, Rivetwell boltless shelving is your storage solution.












• All units/components available in Tan

- Select units/components available in Black
- See charts for stock availability of Tan or Black

RIVETWELL BOLTLESS SHELVING

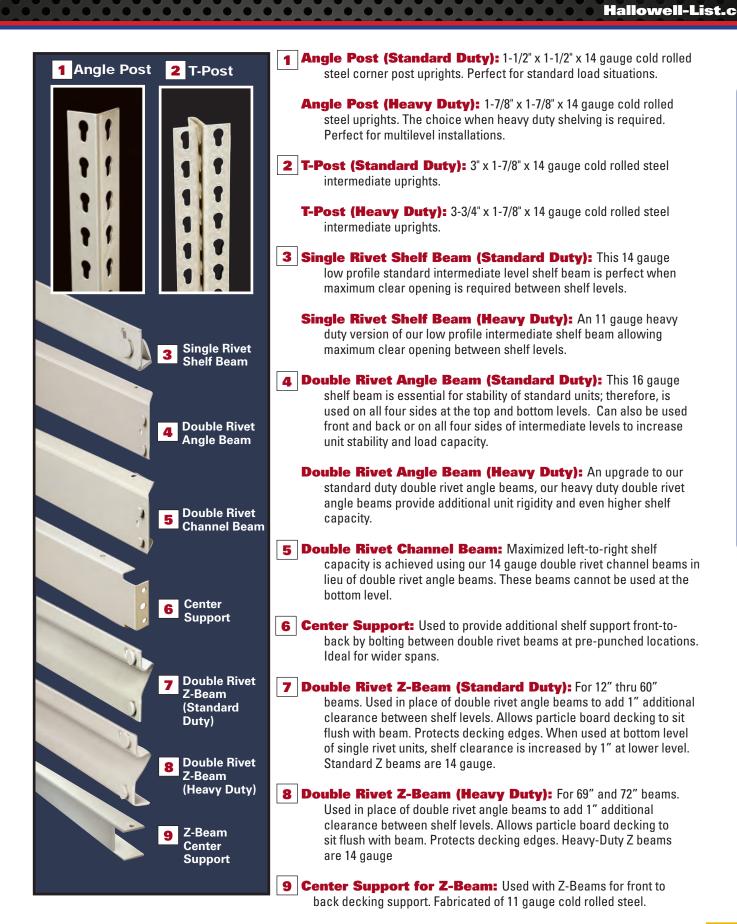


5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

7


UNIT GROWTH CHART

When designing a shelving layout, unit growth must be considered. To determine the overall dimension of a continuous row of shelving employing T-Posts or Angle Posts with tie plates, refer to the table below.

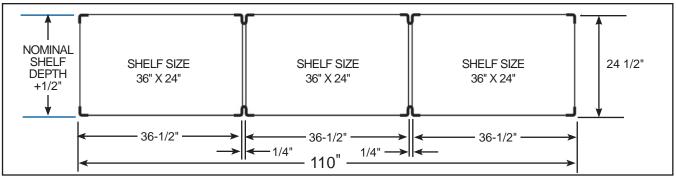


Unit Clear Width

Examples below are based on 36" wide shelf.

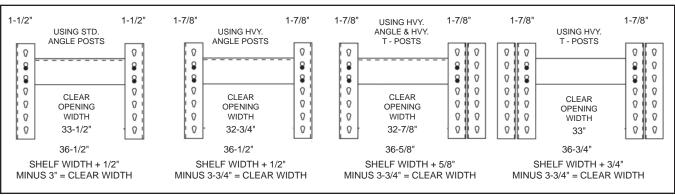


Vertical Shelf Clearance for Single Rivet Units

This chart depicts shelf clearances for typical rivetwell shelving units with 1-1/2" vertical shelf adjustment



Vertical Shelf Clearance for Double Rivet units



	SINGLE RIVET UNITS - 84'' HIGH								
		36'	" Wide Units			48'' Wie	de Units		
(Decking not included)						(Decking n	ot included)		
Levels	Depth	Shelf Capacity	Starter Model No.	Adder Model No.	Shelf Capacity	Starter Model No.	Adder Model No.	Color Selection	
5 Shelf	12	350	SRS361284-5S	SRS361284-5A	250	SRS481284-5S	SRS481284-5A	РТ	
Units	18	350	SRS361884-5S	SRS361884-5A	250	SRS481884-5S	SRS481884-5A	РТ	
	24	350	SRS362484-5S	SRS362484-5A	250	SRS482484-5S	SRS482484-5A	РТ	
	30	350	SRS363084-5S	SRS363084-5A	250	SRS483084-5S	SRS483084-5A	РТ	
	36	350	SRS363684-5S	SRS363684-5A	250	SRS483684-5S	SRS483684-5A	РТ	
6 Shelf	12	350	SRS361284-6S	SRS361284-6A	250	SRS481284-6S	SRS481284-6A	РТ	
Units	18	350	SRS361884-6S	SRS361884-6A	250	SRS481884-6S	SRS481884-6A	PT	
	24	350	SRS362484-6S	SRS362484-6A	250	SRS482484-6S	SRS482484-6A	PT	
	30	350	SRS363084-6S	SRS363084-6A	250	SRS483084-6S	SRS483084-6A	PT	
	36	350	SRS363684-6S	SRS363684-6A	250	SRS483684-6S	SRS483684-6A	PT	
7 Shelf	12	350	SRS361284-7S	SRS361284-7A	250	SRS481284-7S	SRS481284-7A	PT	
Unit	18	350	SRS361884-7S	SRS361884-7A	250	SRS481884-7S	SRS481884-7A	PT	
	24	350	SRS362484-7S	SRS362484-7A	250	SRS482484-7S	SRS482484-7A	PT	
	30	350	SRS363084-7S	SRS363084-7A	250	SRS483084-7S	SRS483084-7A	PT	
	36	350	SRS363684-7S	SRS363684-7A	250	SRS483684-7S	SRS483684-7A	PT	
8 Shelf	12	350	SRS361284-8S	SRS361284-8A	250	SRS481284-8S	SRS481284-8A	PT	
Unit	18	350	SRS361884-8S	SRS361884-8A	250	SRS481884-8S	SRS481884-8A	РТ	
	24	350	SRS362484-8S	SRS362484-8A	250	SRS482484-8S	SRS482484-8A	РТ	
	30	350	SRS363084-8S	SRS363084-8A	250	SRS483084-8S	SRS483084-8A	РТ	
	36	350	SRS363684-8S	SRS363684-8A	250	SRS483684-8S	SRS483684-8A	PT	

Starter units consist of four standard angle posts, four left-to-right standard double rivet angle beams, four front-to-back standard double rivet angle beams, two left-to-right standard single rivet beams per intermediate level and two front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include two front-to-back single rivet beams at each intermediate level). Adder units consist of two standard T-Posts, four left-to-right standard double rivet angle beams, two front-to-back standard double rivet angle beam, two left-to-right standard single rivet beam per intermediate level and one front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include one front-to-back single rivet beam at each intermediate level).

Be sure to order one each of Wire or Particle board decking per level.

See page 15-16 for decking options (sold separately) EZ-Deck steel decking can NOT be used on single rivet units.



Standard 5-shelf single rivet starter unit (order decking separately)

Without Center Support (Decking Not Included)							With Center Support (Decking Not Included)			
Width	Beam Type	Depth	Shelf Cap	Starter Model No.	Adder Model No.	Shelf Cap	Starter Model No.	Adder Model No.		
48"	Heavy-Duty	18	750	DRH481884-4S	DRH481884-4A	1400	DRHC481884-4S	DRHC481884-4A	PT, ME	
	Angle	24	750	DRH482484-4S	DRH482484-4A	1400	DRHC482484-4S	DRHC482484-4A	PT, ME	
		30	750	DRH483084-4S	DRH483084-4A	1310	DRHC483084-4S	DRHC483084-4A	PT, ME	
		36	750	DRH483684-4S	DRH483684-4A	1220	DRHC483684-4S	DRHC483684-4A	PT, ME	
		48	750	DRH484884-4S	DRH484884-4A	1125	DRHC484884-4S	DRHC484884-4A	PT, ME	
60"	Heavy-Duty	18	600	DRH601884-4S	DRH601884-4A	1200	DRHC601884-4S	DRHC601884-4A	PT, ME	
	Angle Beam	24	600	DRH602484-4S	DRH602484-4A	1200	DRHC602484-4S	DRHC602484-4A	PT, ME	
		30	600	DRH603084-4S	DRH603084-4A	1200	DRHC603084-4S	DRHC603084-4A	PT, ME	
		36	600	DRH603684-4S	DRH603684-4A	1200	DRHC603684-4S	DRHC603684-4A	PT, ME	
		48	600	DRH604884-4S	DRH604884-4A	1200	DRHC604884-4S	DRHC604884-4A	PT, ME	
60"	Channel	18	-	-	-	2000	DRCC601884-4S	DRCC601884-4A	PT	
	Beam	24	-	-	-	2000	DRCC602484-4S	DRCC602484-4A	PT	
		30	-	-	-	2000	DRCC603084-4S	DRCC603084-4A	PT	
		36	-	-	-	2000	DRCC603684-4S	DRCC603684-4A	PT	
		48	-	-	-	2000	DRCC604884-4S	DRCC604884-4A	PT	
72"	Heavy-Duty	18	500	DRH721884-4S	DRH721884-4A	1000	DRHC721884-4S	DRHC721884-4A	PT, ME	
	Angle Beam	24	500	DRH722484-4S	DRH722484-4A	1000	DRHC722484-4S	DRHC722484-4A	PT, ME	
		30	500	DRH723084-4S	DRH723084-4A	1000	DRHC723084-4S	DRHC723084-4A	PT, ME	
		36	500	DRH723684-4S	DRH723684-4A	1000	DRHC723684-4S	DRHC723684-4A	PT, ME	
		48	500	DRH724884-4S	DRH724884-4A	1000	DRHC724884-4S	DRHC724884-4A	PT, MI	
72"	Channel	18	-	-	-	1850	DRCC721884-4S	DRCC721884-4A	PT	
	Beam	24	-	-	-	1850	DRCC722484-4S	DRCC722484-4A	PT	
		30	-	-	-	1850	DRCC723084-4S	DRCC723084-4A	PT	
		36	-	-	-	1850	DRCC723684-4S	DRCC723684-4A	PT	
		48	-	-	-	1850	DRCC724884-4S	DRCC724884-4A	PT	
96"	Heavy-Duty	18	-	-	-	620	DRHC961884-4S	DRHC961884-4A	PT, M	
	Angle Beam	24	-	-	-	620	DRHC962484-4S	DRHC962484-4A	PT, ME	
		30	-	-	-	620	DRHC963084-4S	DRHC963084-4A	PT, MI	
		36	-	-	-	620	DRHC963684-4S	DRHC963684-4A	PT, ME	
		48	-	-	-	620	DRHC964884-4S	DRHC964884-4A	PT, ME	
96"	Channel	18	-	-	-	1400	DRCC961884-4S	DRCC961884-4A	PT	
	Beam	24	-	-	-	1400	DRCC962484-4S	DRCC962484-4A	PT	
		30	-	-	-	1400	DRCC963084-4S	DRCC963084-4A	PT	
		36	-	-	-	1400	DRCC963684-4S	DRCC963684-4A	PT	
		48	-	-	-	1400	DRCC964884-4S	DRCC964884-4A	PT	
				DOUBLE RIVE	T UNITS - 120"	HIGH	WITH 5 LEVELS			
72"	Heavy-Duty	30	500	DRH7230120-5S	DRH7230120-5A	1000	DRHC7230120-5S	DRHC7230120-5A	PT	
	Angle Beam	36	500	DRH7236120-5S	DRH7236120-5A	1000	DRHC7236120-5S	DRHC7236120-5A	PT	
		48	500	DRH7248120-5S	DRH7248120-5A	1000	DRHC7248120-5S	DRHC7248120-5A	PT	
72"	Channel	30	-	-	-	1490	DRCC7230120-5S	DRCC7230120-5A	PT	
	Beam	36	-	-	-	1490	DRCC7236120-5S	DRCC7236120-5A	PT	
		48	-	-	-	1490	DRCC7248120-5S	DRCC7248120-5A	PT	
96"	Heavy-Duty	30	-	-	-	620	DRHC9630120-5S	DRHC9630120-5A	PT	
	Angle Beam	36	-	-	-	620	DRHC9636120-5S	DRHC9636120-5A	PT	
		48	-	-	-	620	DRHC9648120-5S	DRHC9648120-5A	PT	
96"	Channel	30	-	-	-	1400	DRCC9630120-5S	DRCC9630120-5A	PT	
	Beam	36	-	-	-	1400	DRCC9636120-5S	DRCC9636120-5A	PT	
		48	-	-	-	1400	DRCC9648120-5S	DRCC9648120-5A	PT	

VETWELL DOUBLE RIVET SHELVING

Starter units consist of four standard angle posts, two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level.

Adder units consist of two standard T-Posts, two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level. Channel beam units are provided with left-to-right double rivet angle beams at bottom level.

See pages 15-16 for decking options (sold separately)



	RECORD STORAGE UNITS							
Width	Depth	Height	Levels	*No. of boxes	Starter Model No.	Adder Model No.	Color Selection	
42"	15"	60"	3	18	RS421560-3S	RS421560-3A	PT	
	30"	60"	3	36	RS423060-3S	RS423060-3A	PT	
69"	15"	60"	3	30	RS691560-3S	RS691560-3A	PT	
	30"	60"	3	60	RS693060-3S	RS693060-3A	PT	
42"	15"	84"	4	24	RS421584-4S	RS421584-4A	PT	
	30"	84"	4	48	RS423084-4S	RS423084-4A	PT	
69''	15"	84"	4	40	RS691584-4S	RS691584-4A	PT	
	30"	84"	4	80	RS693084-4S	RS693084-4A	PT	
42"	15"	108"	5	30	RS4215108-5S	RS4215108-5A	PT	
	30"	108"	5	60	RS4230108-5S	RS4230108-5A	PT	
69''	15"	108"	5	50	RS6915108-5S	RS6915108-5A	PT	
	30"	108"	5	100	RS6930108-5S	RS6930108-5A	PT	

Be sure to order one each of particle board or EZ-Deck steel decking per level. See pages 15-16 for decking options (sold separately)

*Box count based on standard record storage box dimensions: 12 x 10 x 15 Record storage boxes are not included


ACCESS UNIT FROM FRONT OR BACK!





RIVETWELL AUTOMOTIVE STORAGE RACKS

TIRE STORAGE RACKS								
Width	Depth	Height	Levels	*Tire Capacity	Starter Model No.	Adder Model No.		
SINGLE ROW								
60''	21"	84"	3	24	TSS602184-3S	TSS602184-3A		
	21"	120''	4	32	TSS6021120-4S	TSS6021120-4A		
	21"	144''	5	40	TSS6021144-5S	TSS6021144-5A		
	21"	192''	6	48	TSS6021192-6S**	TSS6021192-6A		
			DOU	BLE ROW				
60''	42"	84"	3	48	TSD602184-3S	TSD602184-3A		
	42"	120''	4	64	TSD6021120-4S	TSD6021120-4A		
	42"	144''	5	80	TSD6021144-5S	TSD6021144-5A		
	42"	192"	6	96	TSD6021192-6S**	TSD6021192-6A		



Tire Storage Rack


(*)Based on average passenger tire (**) Supplied with heavy-duty posts

Μι	MUFFLER STORAGE UNITS							
Width	Depth	Height	Levels	Starter Model No.	Adder Model No.			
48"	36"	84''	5	MS483684-5S	MS483684-5A			
96"	36"	84''	5	MS963684-5S	MS963684-5A			

Be sure to order one each of particle board decking per level.

HANGING TAILPIPE RACK

Width	Depth	Height	Starter Model No.					
48''	18''	120"	HTP4818120					
96"	18''	120"	HTP9618120					



Hanging Tailpipe Rack



Tire Rack



Muffler Storage Rack

12

RIVETWELL SHELVING COMPONENT



PART DESCRIPTI	ON	HEIGHT	STANDARD PART NO.	HEAVY-DUTY PART NO.
ANGLE POS	T		1-1/2"x 1-1/2" (14 ga)	1-7/8" x 1-7/8" (14 ga)
Punched for sel	f	3'	APS03	-
adjustment on	•	4'	APS04	-
1-1/2" centers		5'	 APS05 	-
\land	\land	6'	 APS06 	APH06
		7'	•• APS07	APH07
$ \Omega ($		8'	 APS08 	APH08
		9'	• APS09	APH09
$ \Omega \Omega$		10'	 APS10 	APH10
		12'	APS12	APH12
	2	14'	APS14	APH14
		16'	APS16	APH16
		Note: For r	APS16 requirements above 1 be spliced using PS05	0'-0' high, multiple

st splice without osts can be si ıy compromising capacity.

T-POST			3"x 1-7/8" (14 ga)	3-3/4" x 1-7/8" (14 ga)
Punched for	self	3'	TPS03	TPH03
adjustment o		4'	TPS04	TPH04
1-1/2" center	S	5'	• TPS05	TPH05
		6'	• TPS06	TPH06
		7'	•• TPS07	TPH07
	Ω	8'	• TPS08	TPH08
		9'	• TPS09	TPH09
		10'	• TPS10	TPH10
	Ň	12'	TPS12	TPH12
	V	14'	TPS14	TPH14
	0	16'	TPS16	TPH16
	U			
			quirements above 10 spliced using PS05	

JL

posts can be spliced using PS05 post splice without compromising capacity.


PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE RIVET ANGLE BEAM		2-3/4"x 1" (16 ga)	2-3/4" x 1" (14 ga)
For left to right and	12"	• ABS12	-
front to back shelf	15"	• ABS15	-
support.	18"	•• ABS18	-
	24"	•• ABS24	-
	30"	•• ABS30	-
	32"	ABS32	-
	36"	•• ABS36	-
	42"	• ABS42	-
	48"		•• ABH48
lo °	60"	-	•• ABH60
00	69"	-	• ABH69
0/	72"	-	•• ABH72
	84"	-	ABH84
	96"	-	•• ABH96

Denotes Stock Component

• Denotes stock item in 729 Tan (PT)

• Denotes stock item in 729 Tan (PT) and 708 Black (ME)

PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE RIVET CHANNEL BEAM			1" x 2-3/4" (14 ga)
For left to right shelf support. Provides for	60" 69"	-	• CBH60 • CBH69
a higher capacity than heavy-duty rivet angle beams.	72" 84"	-	 CBH72 CBH84 CBU88
	96"		• CBH96



Note: When a bottom shelf is required to be at the bottom level, use a Heavy-Duty Double Rivet Angle Beam.

SINGLE RIVET 1"-1/4" x 7/8" (11 ga) 1" x 21/32" (14 ga) BEAM SRBS12 12" -For use as left to right and 15" SRBS15 front to back support. See 18" SRBS18 _ Beam Load Table 24" SRBS24 for capacity. 30" • SRBS30 36" • SRBS36 SRBH36 42" SRBS42 SRBH42 48" SRBH48 SRBS48 0

CENTER SUPPORT		2-3/4" x 1" x 1" (16 ga)	
Bolts to double rivet angle	12"	• CS12	-
or channel beams to add sup-	15"	• CS15	-
port to decking and stabilize	18"	•• CS18	-
beams. Supplied with nuts and bolts for fast assembly.	24"	•• CS24	-
Use 1 per pair of beams up to	30"	•• CS30	-
84", 2 per pair of 96" beams.	32"	CS32	-
\sim	36"	•• CS36	-
	42"	CS42	-
	48"	•• CS48	-

DOUBLE ROW AND TOP TIE			2-1/2" x 1/4" (14 ga)
	9-1/4"		DRTT09
Use to space back-to-back	12-1/4"	-	DRTT12
units and to top-tie rows across aisle for	15-1/4"	-	DRTT15
added stability.	18-1/4"	-	 DRTT18
	24-1/4"	-	DRTT24
	36-1/4"	-	DRTT36
	42-1/4"	-	DRTT42
	48-1/4"	-	DRTT48
0 0			



5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

0 0

Hallowell-List.com

RIVETWELL SHELVING COMPONENTS

PART DESCRIPTION	LENGTH	STANDARDPART NO.	HEAVY-DUTY PART NO.
WALL TIE		2-1/2"x 1-1/4" (14 ga)	
Used to secure units to wall and provide space between wall and unit (Hardware to attach to wall not included).	9-1/4"	• WT09	-
		4 4 10 1/2 4 4 10 1/2 2 01 (4 4 m)	
FOOT PLATE	3"	1-1/2"x 1-1/2" x 3" (14 ga)	
For use in anchoring angle and T-Posts to floor. (Hardware included for attaching posts-Hardware to anchor to the floor not included.) anchor holes are 3/8" diameter.		• FPR100	
POST SPLICE		1-3/8"x 1-3/8" x 5" (11 ga)	
Used to extend post, attaches to outside	5"	• PS05	-
of post. Order one per Angle Post, two per T-Post.			
TIE PLATE		3" x 3" (14 ga)	
Used for structural integrity of T-Post and to join Angle Post units side by side to ensure prop- er row alignment.	NA	• TP1	-
TIRE RACK BEAM		3" x 3" (14 ga)	
For left to right shelf support of tires. 9	48" 60"	TRB48 • TRB60	-
degrees of angle on the supporting edge.			-
STOCK	S T	729 70 In (PT) Black	

6

D

Denotes Stock Component • Denotes stock item in 729 Tan (PT)

PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
HANGER BAR		1-1/4" x 1-1/4" x 1-1/4"	(14 ga)
For hanging items	36"	HB 36	-
between double rivet beams. One or more	42"	HB 42	-
may be used per level.	48"	HB 48	-
in the second se	60"	HB 60	
DECK OVER GRATING SUPPORT		3-12" x 1-1	3/16" x 2-3/16" (11 ga)
Provides secure	36"		DOGS36
support for grating	48"	-	DOGS48
when decking over entire installation.	60"		DOGS60
	69"		DOGS69
	72"		DOGS72
DOWN AISLE GRATING SUPPORT		3-12" X 1-13	8/16" X 1-15/16" (11 ga)
Attaches to unit front	36"	-	DAGS36
between rows to provide	48"	-	DAGS48
support for grating on 2-level rivetwell installa-	60" 69"	-	DAGS60 DAGS69
tions. For maximum aisle width of 48". Use a	09 72"		DAGS09 DAGS72
minimum of 3 screws per support. 9 degree angle on top edge.		0.00	
PART DESCRIPTION	LENGTH	LEFT PART NO.	RIGHT PART NO.
BEAM CLEAT		1-1/2" x 1"-1	/2" x 3" (14 ga)
For hanging items	3"	BC-L	BC-R
between double rivet beams. One or more may be used per level.		000	000
SLOTTED ANGLE CLEAT		1-1/2" x 1"-1	/2" x 3" (14 ga)
For use where slotted	3"	SAC-L	SAC-R
angle pieces must be joined, such as special grating supports and top ties.		0 0	

RIVETWELLTM SHELVING CO0MPONENETS



PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE RIVET Z-BEAM (STANDARD)		2-1/8"x 7/8" (14 ga)	
For front to back and left	12"	ZBS12	-
to right. allows particle	15"	ZBS15	-
board decking to sit flush	18"	ZBS18	-
with top of beam.	24"	ZBS24	-
	30"	ZBS30	-
	36"	ZBS36	
	42"	ZBS42	-
	48"	ZBS48	-
	60"	ZBS60	-

DOUBLE RIVET Z-BEAM (HEAVY-DUT	·γ)	2-1/8"x 7/8" (14 ga)	
For front to back and	48"	-	ZBH48
left to right. Allows	60"	-	ZBH60
particle board decking to sit flush	69"	-	ZBH69
with top of beam.	72"	-	ZBH72




CENTER SUPPORT FOR Z-BEAMS	1-3/16" X 1-1/8" X 7/8" (11 GA)				
Use with Z-beams for	24"	ZCS24	-		
additional decking	30"	ZCS30	-		
support front	36"	ZCS36	-		
to back.	42"	ZCS42	-		
	48"	ZCS48	-		

COAT ROD SUPPORT BEAM		2-3/4" X 1" (14 ga)	
For supporting	18"	ABH18CR	-
For supporting Rivetwell coat rods	24"	ABH24CR	-
4	30"	ABH30CR	-
•	36"	ABH36CR	-
	48"	ABH48CR	-

RIVETWELL COAT ROD	1' O.D. SCH40 Steel Pipe				
For use with coat rods	36"	RCR36	-		
and support beams	48"	RCR48	-		
	60"	RCR60	-		
\sim	72"	RCR72	-		

RED COLOR Denotes Stock Component

Rivetwell Flat Wire Decking



4 gauge wire in 2" x 4" pattern.

Part Number	Size (inches) W x D	Wire Supports	*Capacity (Lbs)				
All decks are Powder Coated Gray.							
HWD3618	36" x 18"	4	725				
HWD3624	36" x 24"	4	605				
HWD3630	36" x 30"	4	485				
HWD3636	36" x 36"	4	455				
HWD3648	36" x 48"	4	300				
HWD4818	48" x 18"	5	725				
HWD4824	48" x 24"	5	605				
HWD4830	48" x 30"	5	485				
HWD4836	48" x 36"	5	455				
HWD4848	48" x 48"	5	300				
HWD6018	60" x 18"	6	725				
HWD6024	60" x 24"	6	605				
HWD6030	60" x 30"	6	485				
HWD6036	60" x 36"	6	455				
HWD6048	60" x 48"	6	300				
All sizes measure 1/8" short of nominal dimension in both directions.							

*Capacities are based on evenly distributed loads and Include a 1.65 safety factor.


15

RIVETWELL PARTICLE BOARD & E-Z DECK CAPACITY RATINGS

See table below of the recommended safe load limits for 5/8" particle board and EZ-Deck steel decking, for uniformly distributed static live loads.

			2 Sides S	upported	4 Sides S	upported	4 Sides + Cen	ter Supported	4 Sides + 2 Cei	nter Supported
Size (inches) W x D	Particle Board Decking	EZ-Deck Steel Decking	LOAD (lbs.)	DEFL (ins)	LOAD (Lbs.)	DEFL (ins)	LOAD (Lbs.)	DEFL (ins)	LOAD (Lbs.)	DEFL (ins)
36x12	HPB3612	HEZD3612	425	0.06	675	0.08				
36x18	HPB3618	HEZD3618	400	0.17	550	0.18				
36x24	HPB3624	HEZD3624	305	0.30	435	0.23	1			
36x30	HPB3630	HEZD3630	250	0.47	385	0.32				
36x36	HPB3636	HEZD3636	150	0.50	180	0.39				
42x12	HPB4212	HEZD4212	490	0.06	755	0.08				
42x18	HPB4218	HEZD4218	460	0.17	600	0.18				
42x24	HPB4224	HEZD4224	355	0.30	500	0.29				
42x30	HPB4230	HEZD4230	300	0.47	410	0.36				
42x36	HPB4236	HEZD4236	175	0.50	385	0.45				
48x12	HPB4812	HEZD4812	560	0.06	850	0.08	1160	0.08		
48x18	HPB4818	HEZD4818	525	0.17	635	0.18	770	0.10		
48x24	HPB4824	HEZD4824	405	0.30	530	0.30	700	0.11		
48x30	HPB4830	HEZD4830	325	0.47	440	0.40	705	0.12		
48x36	HPB4836	HEZD4836	200	0.50	400	0.50	755	0.12		
48x48	HPB4848	HEZD4848	85	0.50	275	0.50	920	0.13		
60x18	HPB6018	HEZD6018	660	0.17	735	0.18	835	0.12	1140	0.08
60x24	HPB6024	HEZD6024	505	0.30	615	0.32	700	0.15	1180	0.10
60x30	HPB6030	HEZD6030	410	0.47	520	0.46	650	0.16	1324	0.11
60x36	HPB6036	HEZD6036	250	0.50	380	0.50	665	0.17	1520	0.12
60x48	HPB6048	HEZD6048	105	0.50	230	0.50	750	0.18	2000	0.14
69x15	HPB6915	HEZD6915	900	0.11	950	0.12	1150	0.12	1250	0.11
69x30	HPB6930	HEZD6930	470	0.50	600	0.50	670	0.20	1220	0.13
72x18	HPB7218	HEZD7218	800	0.17	850	0.17	1000	0.15	1200	0.10
72x24	HPB7224	HEZD7224	605	0.30	680	0.31	770	0.19	1135	0.12
72x30	HPB7230	HEZD7230	500	0.47	610	0.50	680	0.21	1200	0.14
72x36	HPB7236	HEZD7236	300	0.50	390	0.50	655	0.23	1325	0.16
72x48	HPB7248	HEZD7248	130	0.50	215	0.50	685	0.25	1670	0.18
84x24	HPB8424	HEZD8424	705	0.30	765	0.31	870	0.23	1150	0.15
84x30	HPB8430	HEZD8430	570	0.47	650	0.49	735	0.27	1150	0.18
84x36	HPB8436	HEZD8436	355	0.50	415	0.50	670	0.29	1210	0.20
84x48	HPB8448	HEZD8448	150	0.50	215	0.50	660	0.33	1460	0.23
96x18	HPB9618	HEZD9618	1050	0.17	1115	0.17	1300	0.18	1500	0.15
96x24	HPB9624	HEZD9624	810	0.30	850	0.31	1000	0.26	1200	0.18
96x30	HPB9630	HEZD9630	655	0.47	710	0.49	800	0.32	1180	0.20
96x36	HPB9636	HEZD9636	405	0.50	450	0.50	710	0.36	1150	0.24
96x48	HPB9648	HEZD9648	170	0.50	200	0.50	650	0.41	1325	0.28

NOTE: The above load chart refers to the deck materials only. Particle board decking is 5/8" industrial grade type 1-M-2. EZ-Deck steel decking is 22 gauge galvanized sheet steel fabricated in 6" deep channel planks (models listed above include multiple planks to meet unit depth). 15" deep Ez-Deck will be shipped in two (2) 7 1/2" deep planks. The allowable shelf load capacity may be reduced due to allowable post and / or beam capacities. Specific deflection limits may also reduce the shelf load capacity. NOTE: EZ-Deck must be center supported on units 48" wide and wider.





Multiple 6" deep planks form each level

Two 7-1/2" planks will be supplied on 15" deep units

UNIT WIDTH

NOTE: EZ-Deck steel decking is for use with double rivet units ONLY.



POST CAPACITY CHART

Recommended safe loads (per post) for use only where seismic forces are not a factor

BEAM SPACING	STD. ANGLE POST CAPACITY	HEAVY ANGLE POST CAPACITY
12"	1530	1735
18"	1520	1720
24"	1510	1695
30"	1490	1680
36"	1350	1660
42"	990	1560
48"	755	1195

BEAM SPACING	STANDARD/HEAVY-DUTY T-POST CAPACITY
12"	5045
18"	4965
24"	4850
30"	4705
36"	4525
42"	4315
48"	4075

Calculate needed post capacity by multiplying the number of shelves by the per shelf load then divide by 4 (Angle posts), or by 2 (T-Posts) then refer to the chart below for the approximate post quantity needed to meet your job requirement.

Post capacities are based on the maximum vertical distance between left-to-right beams or front-to-back beams, whichever is greater. In single rivet beam units, the vertical distance between front-to-back beams will usually govern. Tie plates must be spaced no more than 48 inches apart to ensure structural stability when joining angle post together. All units require tie plates at top and bottom.

The above capacities are not intended for use when designing multi-level systems or for specific requirements where seismic forces are a factor. For specific multi-level or seismic requirements contact your Hallowell Sales Manager.

BEAM LOAD TABLE (CAPACITY PER PAIR)

Recommended safe use allowable uniformly distributed hand loaded static beam loads

	WITHOU	T CENTER. S	UPTS.(***)	WITH CENT	ER. SUPTS.(*)		
	LENGTH (IN.)	CAPACITY (LBS.)	DEFLECTION (IN.)	CAPACITY (LBS.)	DEFLECTION (IN.)		
SINGLE RIVET SHELF BEAMS	S						
	36	350	0.25	-	-		
STANDARD BEAM	42	300	0.30	-	-		
	48	250	0.34	-	-		
	36	600	0.25	-	-		
HEAVY DUTY BEAM	42	550	0.30	-	-		
	48	500	0.34	-	-		
DOUBLE RIVET ANGLE BEAM	//S						
	36	1000	***	-	-		
STANDARD BEAM	42	780	***	-	-		
	48	750	***	1400**	0.16		
	60	600	***	1200	0.25		
HEAVY DUTY BEAM	69	525	***	1050	0.33		
	72	500	***	1000	0.36		
	84	-	-	840	0.49		
	96	-	-	620	0.53		
DOUBLE RIVET CHANNEL BE							
	60	-	-	2240	0.23		
	72	-	-	1850	0.33		
	84	-	-	600	0.45		
	96	-	-	1400	0.59		
DOUBLE RIVET Z-BEAMS							
	48	1250	-	1750	-		
	60	750	-	1000	-		
	69	600	-	1000	-		
	72	600	-	1000	-		

DESIGN CRITERIA:

All units must have a full perimeter of double rivet beams at the top and bottom to ensure a stable and rigid unit. All units using single rivet beams 10'0" to 18"0" in height, require an additional double rivet perimeter beam level located approximately in the middle of the unit.

All single rivet beam units must have one (1) intermediate pair of front to back beams for 7'0" and 8'0" high units and (2) intermediate pair of front to back beams for 9'0" high units. For 10'0" to 18'0" high units refer to the above paragraph.

DO NOT exceed 48" between front to back beams. Single Rivet and Double Rivet Front-to-Back Beams may be common when using T-Posts on units up to 8' high.

All intermediate single rivet levels over 24 inches deep must also have single rivet beams supporting the particle board front to back.

All double rivet beam units must have front to back beams at each shelf level.

(*) One (1) support per pair of beams except 96" which have two (2) supports

(**) Refer to shelf load capacities for beam capacities when depth is 30", 36", and 48"

(***) Beam rotation is less than 5 degrees



RIVETWELL BOLTLESS HIGH CAPACITY SHELVING

 \checkmark High Shelf Capacity \checkmark No Cross Braces \checkmark 360°Access



FEATURES:

- Shelves adjust in 1-1/2" increments
- 5 shelf levels
- Easy assembly
- Holds up to 2,300 lb. per shelf (Based on evenly distributed loads)
- Black powder coat finish
- Levels are center supported for increased capacity

FEATURES:

Angle Post : 1-1/2" x 1-1/2" x 14 gauge cold rolled steel corner post uprights.

Double Rivet Angle Beam (36" in length): 2-3/4" x 1" x 16 gauge cold rolled steel.

Double Rivet Angle Beam (48" long and greater): 2-3/4" x 1" x 14 gauge cold rolled steel. An upgrade to our standard duty double rivet angle beams, our heavy duty double rivet angle beams provide additional unit rigidity and even higher shelf capacity.



Center Support: 2-3/4" x 1" x 1" x 16 gauge cold rolled steel. Used to provide additional shelf support front-to-back by bolting between double rivet beams at pre-punched locations.

Steel Decking: 14 gauge cold rolled sheet steel with flange formed at front and back designed to overhang left to right beams at front and back.



Width	Depth	Height	Catalog No.	Shelf Capacity
84" HIGH BOL	TLESS SI	HELVING		
36	18	84	HCR361884-5ME	2,300
48	18	84	HCR481884-5ME	2,200
48	24	84	HCR482484-5ME	2,000
60	24	84	HCR602484-5ME	2,000
72	24	84	HCR722484-5ME	1,900
72	36	84	HCR723684-5ME	1,900
96	24	84	HCR962484-5ME	1,900
96	36	84	HCR963684-5ME	1,900
96" HIGH BOL	TLESS SI	HELVING		
36	18	96	HCR361896-5ME	2,300
48	18	96	HCR481896-5ME	2,200
48	24	96	HCR482496-5ME	2,000
60	24	96	HCR602496-5ME	2,000
72	24	96	HCR722496-5ME	1,900
72	36	96	HCR723696-5ME	1,900
96	24	96	HCR962496-5ME	1,900
96	36	96	HCR963696-5ME	1,900

RED COLOR Denotes Stock Component

HIGH CAPACITY BOLTED DIE RACK SHELVING



🗹 High Shelf Capacity 🗹 No Cross Braces 🗹 360°Access



FEATURES:

- Shelves adjust in 1" increments
- 5 shelf levels
- Nut and bolt assembly
- Holds up to 2,800 lb. per shelf (Based on evenly distributed loads)
- Dark Gray powder coat finish
- Shelves are reinforced to prevent deflection under heavy loading



FEATURES:

Angle Post: Are 13 gauge cold rolled steel 2" x 2" corner post uprights punched on 1" centers for adjusting shelves High Capacity Shelves: Are 14 gauge cold rolled steel and double flanged at all four sides. All four corners are punched to allow shelves to be securely bolted to angle posts. Minimum four nuts and bolts per corner.


High Capacity Reinforced Bolted Shelving



Cross-section view shows Individual reinforced shelf for bolted die shelving.

١	Vidth	Depth	Height	Catalog No.	Shelf Capacity			
84" HIGH BOLTED SHELVING								
3	6	18	84	HCS361884-5HG	2,800			
4	8	18	84	HCS481884-5HG	2,600			
4	8	24	84	HCS482484-5HG	2,500			
6	0	24	84	HCS602484-5HG	2,300			
7	2	24	84	HCS722484-5HG	2,000			









Hi-Tech shelving has the strength needed to handle most industrial applications and versatility for today's modern facilities. Every shelving unit is designed and engineered to meet the highest standards.

A full complement of accessories including full dividers, partial dividers, label holders, swinging doors, post splices for multilevel systems and foot plates are available to complete your system.

3 DAY SHIPPING ON ALL IN-STOCK Hi-Tech SHELVING







HI-TECH SHELVING













BOX FORMED SHELVES

- Tubular welded box beam front and rear for maximum strength
- Exclusive triple bend side flanges for added strength
- Lapped and welded corners
- Top of shelf is punched to accept shelf dividers

ANGLE BACK POSTS & T-POSTS

- Roll formed into a unique angle shape for maximum strength
- The long leg is punched on 1-1/2" centers to allow independent shelf adjustment
- Angle Posts can be used in place of Beaded Front Posts if desired

BEADED FRONT POSTS

- · Beaded for strength
- Flush to permit straight-in/straight-out shelf installation, shelf changing and full use of shelf width
- Punched on 1-1/2" centers to allow independent shelf adjustment

H-POSTS

- Designed for high-density applications
- More than twice the capacity of standard posts
- Used at front and back
- Used with standard Hi-Tech components

ONE PIECE SHELF CLIP

- Four sturdy and compact clips per shelf
- Keys firmly into post slots to hold shelves securely in place
- Fits Beaded Front, Angle Back Posts and T-Posts
- Non-Intrusive clip sits flush with inside edge
 of front posts



Base Strips Close bottom to prevent debris accumulation

ACCESSORIES



Swinging Doors Allow cabinet-style storage



Shelf Dividers For organized storage

3 DAY SHIPPING ON ALL IN-STOCK HI-TECH SHELVING



HI-TECH OPEN SHELVING UNITS















UNIT



* Shelf capacity based on a factor of 1.65

Color for all components 725 Dark Gray. Optional colors are available at a nominal charge, additional lead times apply.

Open units: Starter units include two beaded front posts, two angle back posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one pair back sway braces, one pair side sway braces and 5-8 shelves. Starter/Adder units 10'-3" include two pairs back sway braces



22

3 DAY SHIPPING ON ALL IN-STOCK HI-TECH SHELVING

w	D	н		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity*
	ium-Dເ						
36	12	87	Starter	4520-12	4521-12	4523-12	500*
36	12	87	Adder	A4520-12	A4521-12	A4523-12	500*
36	18	87	Starter	4520-18	4521-18	4523-18	500*
36	18	87	Adder	A4520-18	A4521-18	A4523-18	500*
36	24	87	Starter	4520-24	4521-24	4523-24	500*
36	24	87	Adder	A4520-24	A4521-24	A4523-24	500*
48	12	87	Starter	4720-12	4721-12	4723-12	375*
48	12	87	Adder	A4720-12	A4721-12	A4723-12	375*
48	18	87	Starter	4720-18	4721-18	4723-18	375*
48	18	87	Adder	A4720-18	A4721-18	A4723-18	375*
48	24	87	Starter	4720-24	4721-24	4723-24	350*
48	24	87	Adder	A4720-24	A4721-24	A4723-24	350*
Hea	/y-Duty	/					
36	12	87	Starter	5520-12	5521-12	5523-12	800*
36	12	87	Adder	A5520-12	A5521-12	A5523-12	800*
36	18	87	Starter	5520-18	5521-18	5523-18	800*
36	18	87	Adder	A5520-18	A5521-18	A5523-18	800*
36	24	87	Starter	5520-24	5521-24	5523-24	800*
36	24	87	Adder	A5520-24	A5521-24	A5523-24	800*
48	12	87	Starter	5720-12	5721-12	5723-12	400*
48	12	87	Adder	A5720-12	A5721-12	A5723-12	400*
48	18	87	Starter	5720-18	5721-18	5723-18	450*
48	18	87	Adder	A5720-18	A5721-18	A5723-18	450*
48	24	87	Starter	5720-24	5721-24	5723-24	500*
48	24	87	Adder	A5720-24	A5721-24	A5723-24	500*
Extra	a Heav	y-Duty					
36	12	87	Starter	7520-12	7521-12	7523-12	1100*
36	12	87	Adder	A7520-12	A7521-12	A7523-12	1100*
36	18	87	Starter	7520-18	7521-18	7523-18	1200*
36	18	87	Adder	A7520-18	A7521-18	A7523-18	1200*
36	24	87	Starter	7520-24	7521-24	7523-24	1250*
36	24	87	Adder	A7520-24	A7521-24	A7523-24	1250*
48	12	87	Starter	7720-12	7721-12	7723-12	750*
48	12	87	Adder	A7720-12	A7721-12	A7723-12	750*
48	18	87	Starter	7720-18	7721-18	7723-18	900*
48	18	87	Adder	A7720-18	A7721-18	A7723-18	900*
48	24	87	Starter	7720-24	7721-24	7723-24	900*
48	24	87	Adder	A7720-24	A7721-24	A7723-24	900*
A	(1	Ohahaa		Madian Date	Harris Desta	Estre Hearry D	
Addi	tional	Shelves		Medium-Duty Cat No.	Heavy-Duty Cat No.	Extra Heavy-Du Cat No.	uty
36	12			5135-3612	5138-3612	5139-3612	See Above
36	18			5135-3618	5138-3618	5139-3618	See Above
36	24			5135-3624	5138-3624	5139-3624	See Above
40	12			5125 4040	5129 4042	5139-4812	See Above
48				5135-4812	5138-4812		
48	18			5135-4818	5138-4818	5139-4818	See Above
48	24			5135-4824	5138-4824	5139-4824	See Above

* Shelf capacity based on a factor of 1.65

Color for all components 725 Dark Gray. Optional colors are available at a nominal charge, additional lead times apply.

Closed units: Starter units include two beaded front posts, two angle back posts, one back panel assembly, two side panel assemblies and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one back panel assembly, one side panel assembly and 5-8 shelves.



ADDER UNIT

STARTER UNIT

OWA

Hallowell-List.com

-

CERTIFIED

5 SHELF UNIT



6 SHELF UNIT







3 DAY SHIPPING ON ALL IN-STOCK HI-TECH SHELVING

HI-TECH OPEN & CLOSED FREE STANDING UNITS

	HELF I UNIT
	and a series
	1





8 SHELF **OPEN UNIT**

w	D	н		5-Shelf Unit	6-Shelf Unit	8-Shelf Unit	Shelf
				Cat No.	Cat No.	Cat No.	Capacity
MEDIUM-I							
36	12	87	Open	F4510-12	F4511-12	F4513-12	500*
36	12	87	Closed	F4520-12	F4521-12	F4523-12	500*
36	18	87	Open	F4510-18	F4511-18	F4513-18	500*
36	18	87	Closed	F4520-18	F4521-18	F4523-18	500*
36	24	87	Open	F4510-24	F4511-24	F4513-24	500*
36	24	87	Closed	F4520-24	F4521-24	F4523-24	500*
48	12	87	Open	F4710-12	F4711-12	F4713-12	375*
48	12	87	Closed	F4720-12	F4721-12	F4723-12	375*
48	18	87	Open	F4710-18	F4711-18	F4713-18	375*
48	18	87	Closed	F4720-18	F4721-18	F4723-18	375*
48	24	87	Open	F4710-24	F4711-24	F4713-24	350*
48	24	87	Closed	F4720-24	F4721-24	F4723-24	350*
HEAVY-DU							
36	12	87	Open	F5510-12	F5511-12	F5513-12	800*
36	12	87	Closed	F5520-12	F5521-12	F5523-12	800*
36	18	87	Open	F5510-18	F5511-18	F5513-18	800*
36	18	87	Closed	F5520-18	F5521-18	F5523-18	800*
36	24	87	Open	F5510-24	F5511-24	F5513-24	800*
36	24	87	Closed	F5520-24	F5521-24	F5523-24	800*
48	12	87	Open	F5710-12	F5711-12	F5713-12	400*
48	12	87	Closed	F5720-12	F5721-12	F5723-12	400*
48	18	87	Open	F5710-18	F5711-18	F5713-18	450*
48	18	87	Closed	F5720-18	F5721-18	F5723-18	450*
48	24	87	Open	F5710-24	F5711-24	F5713-24	500*
48	24	87	Closed	F5720-24	F5721-24	F5723-24	500*
	EAVY-DUT						
36	12	87	Open	F7510-12	F7511-12	F7513-12	1100*
36	12	87	Closed	F7520-12	F7521-12	F7523-12	1100*
36	18	87	Open	F7510-18	F7511-18	F7513-18	1200*
36	18	87	Closed	F7520-18	F7521-18	F7523-18	1200*
36	24	87	Open	F7510-24	F7511-24	F7513-24	1250*
36	24	87	Closed	F7520-24	F7521-24	F7523-24	1250*
48	12	87	Open	F7710-12	F7711-12	F7713-12	750*
48	12	87	Closed	F7720-12	F7721-12	F7723-12	750*
48	18	87	Open	F7710-18	F7711-18	F7713-18	900*
48	18	87	Closed	F7720-18	F7721-18	F7723-18	900*
48	24	87	Open	F7710-24	F7711-24	F7713-24	900*
48	24	87	Closed	F7720-24	F7721-24	F7723-24	900*

Addition	al Shelves	Medium-Duty Cat No.	Heavy-Duty Cat No.	Extra Heavy-D Cat No.	uty
36	12	5135-3612	5138-3612	5139-3612	See Above
36	18	5135-3618	5138-3618	5139-3618	See Above
36	24	5135-3624	5138-3624	5139-3624	See Above
48	12	5135-4812	5138-4812	5139-4812	See Above
48	18	5135-4818	5138-4818	5139-4818	See Above
48	24	5135-4824	5138-4824	5139-4824	See Above

* Shelf capacity based on a factor of 1.65

Color for all components 725 Dark Gray. Optional colors are available at a nominal charge, additional lead times apply.

Open units: Units include four angle posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. Closed units: Units include four angle posts, two side panel assemblies, one back panel assembly and 5-8 shelves.







OPEN UNITS

w	D	н		8-Shelf Unit Cat. No.	11-Shelf Unit Cat. No.	Shelf Capacity*
36	12	87	Starter	4513-12PL-AM	451C-12PL-AM	500
36	12	87	Adder	A4513-12PL-AM	A451C-12PL-AM	500
36	18	87	Starter	4513-18PL-AM	451C-18PL-AM	500
36	18	87	Adder	A4513-18PL-AM	A451C-18PL-AM	500
36	24	87	Starter	4513-24PL-AM	451C-24PL-AM	500
36	24	87	Adder	A4513-24PL-AM	A451C-24PL-AM	500
48	12	87	Starter	4713-12PL-AM	471C-12PL-AM	375
48	12	87	Adder	A4713-12PL-AM	A471C-12PL-AM	375
48	18	87	Starter	4713-18PL-AM	471C-18PL-AM	375
48	18	87	Adder	A4713-18PL-AM	A471C-18PL-AM	375
48	24	87	Starter	4713-24PL-AM	471C-24PL-AM	350
48	24	87	Adder	A4713-24PL-AM	A471C-24PL-AM	350

8 SHELF DPEN ADDER UNIT

ANTIMICROBIAL PROTECTION

FOR OVER 20 YEARS

Hallowell-List.

11 SHELF OPEN STARTER UNIT

* Shelf capacity based on a uniformly distributed load and a safety factor of 1.65

Open Units:

Starter units include two beaded front posts, two angle back posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one pair back sway braces, one pair side sway braces and 5-8 shelves.

CLOSED UNITS

w	D	н		8-Shelf Unit Cat. No.	11-Shelf Unit Cat. No.	Shelf Capacity*
36	12	87	Starter	4523-12PL-AM	452C-12PL-AM	500
36	12	87	Adder	A4523-12PL-AM	A452C-12PL-AM	500
36	18	87	Starter	4523-18PL-AM	452C-18PL-AM	500
36	18	87	Adder	A4523-18PL-AM	A452C-18PL-AM	500
36	24	87	Starter	4523-24PL-AM	452C-24PL-AM	500
36	24	87	Adder	A4523-24PL-AM	A452C-24PL-AM	500
48	12	87	Starter	4723-12PL-AM	472C-12PL-AM	375
48	12	87	Adder	A4723-12PL-AM	A472C-12PL-AM	375
48	18	87	Starter	4723-18PL-AM	472C-18PL-AM	375
48	18	87	Adder	A4723-18PL-AM	A472C-18PL-AM	375
48	24	87	Starter	4723-24PL-AM	472C-24PL-AM	350
48	24	87	Adder	A4723-24PL-AM	A472C-24PL-AM	350

* Shelf capacity based on a uniformly distributed load and a safety factor of 1.65

Closed Units:

Starter units include two beaded front posts, two angle back posts, one back panel assembly, two side panel assemblies and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one back panel assembly, one side panel assembly and 5-8 shelves.



8 SHELF CLOSED ADDER UNIT



Hallowell

Hallowell-List.com

Т

Г

HI-TECH BIN SHELVING UNITS

Т

Т

٦

	MODE	12 12 12 12 12 12 12 12 12 12 12 12	MODE	12 12 12 12 12 12 12 12 12 12 12 12 12 1	MODE	9 9 9 9 9 9 9 9 9 9 9 9 9 9 12 5527		9 9 9 9 9 9 9 9 9 9 9 9 9 9 12 12	MODE	6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6		9 9 9 9 9 9 9 9 9 9 9 9 12
	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS	SIZE
SHELF DEPTH	14	18"X12"	21	12"x12"	32 4	9"x9" 9"x12"	48 6	6"x9" 6"x12"	66 12	6"x6" 6"x9"	48 6 All with 3" hig	6"x9" 6"x12"
	STAF	RTER	STA	RTER	STAF	RTER	STA	RTER	STAF	RTER	STA	RTER
12"	552	5-12		6-12	552	7-12	552	8-12	552	9-12	553	0-12
18"		5-18		6-18	552	-		8-18		9-18		0-18
24"	552			6-24	552			8-24		9-24		0-24
12"	1	DER 25-12		DER 26-12	ADI A552			DER 28-12		DER		DER
18"		25-12		26-12	A552			28-12	A5529-12 A5529-18		A5530-12 A5530-18	
24"	A552			26-24	A552	-	A5528-24		A5529-24			30-24
		9 9 9 9 12 12 12 12 12 12 12 12 12		9 9 9 9 12 12 12 12 12 12 12		12 12 12 12 12 12 12 12 12 12 12 12		12 12 12 12 12 12 12 12 12 12 12 12		9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9		12 12 12 12 12 12 12 12 12 12 12
	MODE	L 5531	MODE	L 5532	MODE	L 5533	MODE	L 5534	MODE	L 5535	MODE	L 5536
	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS		OPENINGS	SIZE	OPENINGS	SIZE
SHELF DEPTH	16 4 9	9"x9" 9"x12" 12"x12"	12 3 6	12"x9" 12"x12" 18"x12"	9 6 1	12"x12" 18"x12" 36"x12"	6 4 12 2	6"x12" 9"x12" 12"x12" 18"x12"	12 6 12 6 2	9"x9" 6"x9" 6"x6" 12"x12" 18"x12"	21 All with 3" hi	12"x12" gh front bins
	STAF	RTER	STA	RTER	STAF	RTER	STA	RTER	STAF	RTER	STA	RTER
12"		1-12		2-12		3-12		4-12		5-12		6-12
18"		1-18		2-18		3-18		4-18		5-18		6-18
24"		1-24		2-24		3-24		4-24		5-24		6-24
40"	i	DER		DER		DER	1	DER		DER	i	DER
12"		31-12		32-12	A553			34-12		85-12		36-12
18"		31-18		32-18	A553			34-18		35-18		36-18
24"	A553	31-24	A55	32-24	A553	33-24	A55	A5534-24		35-24	A553	36-24

NOTES: • Starter & adder units are made up of the same components as shown on page 23 and include metal

dividers to create each specific configuration and base strips.

• All units shown are 36" wide x 87" high. 48" wide units are also available.

• Size of openings is indicated by width x height.



H-POST DEEP BIN UNITS



HEAVY-DUTY INDUSTRIAL DEEP BIN SHELVING UNITS FEATURE:

- H-Post
- Heavy-duty Hi-Tech box formed shelves
- Vertical dividers bolt in for added strength & durability 18 gauge side panels
- 3/4" Plywood back painted Marine Blue [MB] to absorb impact
- Horizontal stabilizer beams prevent sway creating rigid frame.
- All Units 36" wide by 87" high







28 BIN UNIT





UP TO 96

Hallowell-List

Total # of	# Bins	# Bins	Nomina	al Bin Dimensions		Starter	Adder
Bins	Wide	High	W	D	Н	Catalog No.	Catalog No.
18	3	6	12	48	10-1/2	HDB18-48	AHDB18-48
18	3	6	12	72	10-1/2	HDB18-72	AHDB18-72
18	3	6	12	96	10-1/2	HDB18-96	AHDB18-96
28	4	7	9	48	9	HDB28-48	AHDB28-48
28	4	7	9	72	9	HDB28-72	AHDB28-72
28	4	7	9	96	9	HDB28-96	AHDB28-96
50	5	10	7	48	6	HDB50-48	AHDB50-48
50	5	10	7	72	6	HDB50-72	AHDB50-72
50	5	10	7	96	6	HDB50-96	AHDB50-96
96	8	12	4-1/2	48	4-1/2	HDB96-48	AHDB96-48
96	8	12	4-1/2	72	4-1/2	HDB96-72	AHDB96-72
96	8	12	4-1/2	96	4-1/2	HDB96-96	AHDB96-96

• Sides are H-Post with nut/bolt side panel assembly. Notes:

• Stock Colors - Marine Blue [MB] sides with Light Gray [PL] shelves and dividers.





HALLOWELL[®] High Capacity Shelving

PROVIDES TWICE THE CAPACITY OF STANDARD POST SHELVING

H-Post High capacity Shelving is ideal when additional strength is required for any shelving installation. It is also recommended for multi-level high-rise applications.

H-POST SHELVING

H-Posts are fabricated from 14 gauge cold rolled steel and formed into a unique tubular design to provide more than twice the load capacity compared to standard posts.







COMBINE WITH STANDARD HI-TECH SHELVING COMPONENTS



H-POST

- Designed for high-density applications
- More than twice the capacity of standard posts
- Used at front and back
- Used with standard Hi-Tech components

BOX FORMED SHELVES

- Tubular welded box beam front and rear for maximum strength
- Exclusive triple bend side flanges for added strength
- Lapped and welded corners
- Top of shelf is punched to accept shelf dividers



ONE PIECE SHELF CLIP

- Each shelf requires four of these sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Also fits Beaded Front, Angle Back Posts and T-Posts
- Provides independent shelf positioning on 1-1/2" centers
- Non-Intrusive clip sits flush with inside edge of front posts



BACK AND SIDE SWAY BRACES

- Standard for open units only
- 11 gauge back and side sway braces create a rigid structure
- Special triple point brace clip provides a strong rigid anchor point for back sway braces



- Standard for closed units only
- Standard stock models include heavy 18 gauge back and side panels for a strong and durable structure
- Multiple panels are used to create full panel height



FOOT PLATES

- Standard stock units include #5025 standard duty foot plates
- Provide a strong and secure anchoring point

3 DAY SHIPPING ON ALL IN-STOCK H-POST SHELVING





H-POST OPEN SHELVING UNITS

AVAILABLE IN 7' AND 10' HIGH UNITS

	w	D	н		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity*
	Heavy-I 36 36 36 36 36	Duty 18 18 24 24 24	87 87 87 87	Starter Adder Starter Adder	H5510-1807 AH5510-1807 H5510-2407 AH5510-2407	H5511-1807 AH5511-1807 H5511-2407 AH5511-2407	H5513-1807 AH5513-1807 H5513-2407 AH5513-2407	800* 800* 800* 800*
STARTER UNIT	36 36 36 36	18 18 24 24	123 123 123 123	Starter Adder Starter Adder	H5510-1810 AH5510-1810 H5510-2410 AH5510-2410	H5511-1810 AH5511-1810 H5511-2410 AH5511-2410	H5513-1810 AH5513-1810 H5513-2410 AH5513-2410	800* 800* 800* 800*
	48 48 48 48	18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder	H5710-1807 AH5710-1807 H5710-2407 AH5710-2407	H5711-1807 AH5711-1807 H5711-2407 AH5711-2407	H5713-1807 AH5713-1807 H5713-2407 AH5713-2407	450* 450* 500* 500*
ADDER	48 48 48 48	18 18 24 24	123 123 123 123	Starter Adder Starter Adder	H5710-1810 AH5710-1810 H5710-2410 AH5710-2410	H5711-1810 AH5711-1810 H5711-2410 AH5711-2410	H5713-1810 AH5713-1810 H5713-2410 AH5713-2410	450* 450* 500* 500*
	Extra H 36 36 36 36 36	eavy-Du 18 18 24 24 24	87 87 87 87 87 87	Starter Adder Starter Adder	H7510-1807 AH7510-1807 H7510-2407 AH7510-2407	H7511-1807 AH7511-1807 H7511-2407 AH7511-2407	H7513-1807 AH7513-1807 H7513-2407 AH7513-2407	1200* 1200* 1250* 1250*
5 SHELF	36 36 36 36	18 18 24 24	123 123 123 123 123	Starter Adder Starter Adder	H7510-1810 AH7510-1810 H7510-2410 AH7510-2410	H7511-1810 AH7511-1810 H7511-2410 AH7511-2410	H7513-1810 AH7513-1810 H7513-2410 AH7513-2410	1200* 1200* 1250* 1250*
	48 48 48 48	18 18 24 24	87 87 87 87	Starter Adder Starter Adder	H7710-1807 AH7710-1807 H7710-2407 AH7710-2407	H7711-1807 AH7711-1807 H7711-2407 AH7711-2407	H7713-1807 AH7713-1807 H7713-2407 AH7713-2407	900* 900* 900* 900*
	48 48 48 48	18 18 24 24	123 123 123 123	Starter Adder Starter Adder	H7710-1810 AH7710-1810 H7710-2410 AH7710-2410	H7711-1810 AH7711-1810 H7711-2410 AH7711-2410	H7713-1810 AH7713-1810 H7713-2410 AH7713-2410	900* 900* 900* 900*

Heavy-Duty Additional Shelves Extra Heavy-Duty Cat No. Cat No. 18 5138-3618PL 5139-3618PL See Above 36 24 36 5138-3624PL 5139-3624PL See Above 48 18 5138-4818PL 5139-4818PL See Above 5138-4824PL 24 5139-4824PL 48 See Above

* Shelf capacity based on a factor of 1.65

Color: All posts, side sway braces, side panels are 707 Marine Blue. All shelves, back sway braces, back panels are 711 Light Gray

8 SHELF UNIT

OPEN UNITS: Starter units include four posts, one back sway brace assembly, two side sway brace assemblies, foot plates and 5-8 shelves. Adder units include two posts, one back sway brace assembly, one side sway brace assembly, foot plates and 5-8 shelves.

	ALL SHELVES BACK SWAY BRACES BACK PANELS	ALL POSTS Side Sway Braces Side Panels
STOCK	711	707
Colors	Light gray (PL)	Marine Blue (MB)





6 SHELF

UNIT

3 DAY SHIPPING ON ALL IN-STOCK H-POST SHELVING

HIPOST

AVAILABLE IN 7' AND 10' HIGH UNITS

CERTIFIED GOLD

w	D	н		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity*
Heavy-D	Duty						
36 36 36	18 18 24	87 87 87	Starter Adder Starter	H5520-1807 AH5520-1807 H5520-2407	H5521-1807 AH5521-1807 H5521-2407	H5523-1807 AH5523-1807 H5523-2407	800* 800* 800*
36	24	87	Adder	AH5520-2407	AH5521-2407	AH5523-2407	800*
36 36 36 36	18 18 24 24	123 123 123 123	Starter Adder Starter Adder	H5520-1810 AH5520-1810 H5520-2410 AH5520-2410	H5521-1810 AH5521-1810 H5521-2410 AH5521-2410	H5523-1810 AH5523-1810 H5523-2410 AH5523-2410	800* 800* 800* 800*
48 48 48 48	18 18 24 24	87 87 87 87	Starter Adder Starter Adder	H5720-1807 AH5720-1807 H5720-2407 AH5720-2407	H5721-1807 AH5721-1807 H5721-2407 AH5721-2407	H5723-1807 AH5723-1807 H5723-2407 AH5723-2407	450* 450* 500* 500*
48 48 48 48	18 18 24 24	123 123 123 123 123	Starter Adder Starter Adder	H5720-1810 AH5720-1810 H5720-2410 AH5720-2410	H5721-1810 AH5721-1810 H5721-2410 AH5721-2410	H5723-1810 AH5723-1810 H5723-2410 AH5723-2410	450* 450* 500* 500*
Extra He	avy-Du	ty Duty					
36 36 36 36	18 18 24 24	87 87 87 87 87	Starter Adder Starter Adder	H7520-1807 AH7520-1807 H7520-2407 AH7520-2407	H7521-1807 AH7521-1807 H7521-2407 AH7521-2407	H7523-1807 AH7523-1807 H7523-2407 AH7523-2407	1200* 1200* 1250* 1250*
36 36 36 36	18 18 24 24	123 123 123 123	Starter Adder Starter Adder	H7520-1810 AH7520-1810 H7520-2410 AH7520-2410	H7521-1810 AH7521-1810 H7521-2410 AH7521-2410	H7523-1810 AH7523-1810 H7523-2410 AH7523-2410	1200* 1200* 1250* 1250*
48 48 48 48	18 18 24 24	87 87 87 87	Starter Adder Starter Adder	H7720-1807 AH7720-1807 H7720-2407 AH7720-2407	H7721-1807 AH7721-1807 H7721-2407 AH7721-2407	H7723-1807 AH7723-1807 H7723-2407 AH7723-2407	900* 900* 900* 900*
48 48 48 48	18 18 24 24	123 123 123 123	Starter Adder Starter Adder	H7720-1810 AH7720-1810 H7720-2410 AH7720-2410	H7721-1810 AH7721-1810 H7721-2410 AH7721-2410	H7723-1810 AH7723-1810 H7723-2410 AH7723-2410	900* 900* 900* 900*

Additional Shelves		onal Shelves	Heavy-Duty Extra Heavy-Duty Cat No. Cat No.	
	36	18	5138-3618PL 5139-3618PL	See Above
	36	24	5138-3624PL 5139-3624PL	See Above
	48	18	5138-4818PL 5139-4818PL	See Above
	48	24	5138-4824PL 5139-4824PL	See Above

* Shelf capacity based on a factor of 1.65

Color: All posts, side sway braces, side panels are 707 Marine Blue. All shelves, back sway braces, back panels are 711 Light Gray

CLOSED UNITS: Starter units include four posts, one back panel assembly, two side panel assemblies, foot plates and 5-8 shelves. Adder units include two posts, one back panel assembly, one side panel assembly, foot plates and 5-8 shelves.





allowel

Hallowell-List.com



allowe

Hallowell-List



DuraTech is Hallowell's newest line of pass-thru steel shelving requiring no cross braces allowing access from all sides while providing the maximum strength, durability and stability needed to handle most industrial applications. DuraTech offers versatility and durability for today's modern facilities.

Our complete line of shelving is designed and engineered to the highest standards.

🗹 No Cross Braces 🗹 360°Access


A MORE EFFICIENT STORAGE SYSTEM!


- Access from all 4 sides
- Top and bottom firmly attached with steel-grip nuts for superior strength
- Available in 5, 7 and 8 shelf models
- Four Angle Posts are used per section allowing units to be individually located, bolted side-by-side or bolted back-to-back.
- Each intermediate shelf uses four sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Provides independent positioning of intermediate shelves on 1-1/2" centers
- Bottom shelf is positioned to prevent debris from collecting beneath unit



DURATECH™ PASS-THRU SHELVING

OUR UNIQUE GRIP NUT DESIGN CREATES A VERY STRONG AND RIGID STRUCTURE







DURATECH™ PASS-THRU SHELVING



Top and bottom shelves attach with bolts at each corner providing a strong and rigid structure



Angle posts are roll formed into a unique angle shape for maximum strength. Leg is punched on 1-1/2" centers to allow independent intermediate shelf adjustment

Fully Adjustable Intermediate Shelves with fixed top and bottom for a strong unit that DOES NOT require CROSS Braces



Bottom shelf is positioned to prevent debris from collecting beneath unit



Intermediate shelves have a tubular flange at the front and rear, and exclusive triple bend sides for added strength.







Hallowell-List.com

Top and bottom shelves are triple flanged at all four sides and bolted to angle posts at all four corners for maximum rigidity, durability and stability.



Compression Shelf Clip for intermediate shelves

	h.,
	Π
1	Π
the second se	
	Ĺ
	1
	V

				5-SHELF UNIT 3-ADJUSTABLE SHELVES	7-SHELF UNIT 5-ADJUSTABLE SHELVES	8-SHELF UNIT 6-ADJUSTABLE SHELVES
w	D	н	* Capacity Per Shelf	5-Shelf Catalog No.	7-Shelf Catalog No.	8-Shelf Catalog No.
36″ WI	DE UNIT	s				
36	12	87	800	DT5510-12	DT5512-12	DT5513-12
36	18	87	800	DT5510-18	DT5512-18	DT5513-18
36	24	87	800	DT5510-24	DT5512-24	DT5513-24
48″ WI	DE UNIT	S				
48	12	87	400	DT5710-12	DT5712-12	DT5713-12
48	18	87	450	DT5710-18	DT5712-18	DT5713-18
48	24	87	500	DT5710-24	DT5712-24	DT5713-24

All Units Include: Four angle posts, two DuraTech bolt-in shelves to be used at unit top and bottom and intermediate adjustable shelves with shelf clips applicable to unit ordered. All DuraTech shelving units are free standing and can be joined end-to-end or back-to-back.







HI-TECH & H-POST COMPONENTS

BEADED FRONT POSTS

True flush construction. Slotted on 1-1/2" centers to permit easy shelf adjustment. Multiple posts can be spliced for added height.

1	6
	ê
	0
	P
	P
	1

Part No.	art No. W		Н	Stock Color		
5002-3W	11/16"	2-9/16"	3'-3"	-	-	-
5002-6W	11/16"	2-9/16"	6'-3"	-	-	-
5002-7W	11/16"	2-9/16"	7'-3"	HG	-	-
5002-8W	11/16"	2-9/16"	8'-3"	-	-	-
5002-10W	11/16"	2-9/16"	10'-3"	HG	-	-
5002-12W	11/16"	2-9/16"	12'-3"	-	-	-

Angles for single or end units. Slotted on 1-1/2" centers to permit easy shelf adjustment. Multiple posts can be spliced for								
permit easy sin	en aujusti	nenit. munti	pie posis	can be spliced for				
·	•		• •	•				
added height.								
J								
Dart No	11/	п	Ц	Stock Color				

Part No.	W	D	Н	Stoc	ck Co	olor
5004-3	1-3/16"	2-5/16"	3'-3"	-	-	-
5004-6	1-3/16"	2-5/16"	6'-3"	-	-	-
5004-7	1-3/16"	2-5/16"	7'-3"	HG	-	-
5004-8	1-3/16"	2-5/16"	8'-3"	-	-	-
5004-10	1-3/16"	2-5/16"	10'-3"	HG	-	-
5004-12	1-3/16"	2-5/16"	12'-3"	-	-	-

ANGLE BACK POSTS

Constructed by spot welding two back posts together. For use when adjoining models are added to form a continuous row. Multiple posts can be spliced for added height.

Part No.	W	D	Н	Stoc	k C	olor
5006-3	2-3/8"	2-5/16"	3'-3"	-	-	-
5006-6	2-3/8"	2-5/16"	6'-3"	-	-	-
5006-7	2-3/8"	2-5/16"	7'-3"	HG	-	-
5006-8	2-3/8"	2-5/16"	8'-3"	-	-	-
5006-10	2-3/8"	2-5/16"	10'-3"	HG	-	-
5006-12	2-3/8"	2-5/16"	12'-3"	-	-	-

	POST SP	LICE CH	IANNEL	S		
A channel formed internal splice. Used to splice beaded Front posts for added height. Also, to splice back posts and T-posts						
0	Part No.	W	D	H	Stock Color	
lo	5009	-	-	-	Plated	

NOTE: For requirements above 16'-3" high, multiple posts can be spliced using 5009 post splice channels without compromising capacity. See page 42-43 for unit load and sway brace information.

Red Part Number Denotes Stock Component Quick-Ship Color Availability As Noted For Each Component









BACK SWAY BRACES

1" x 11 ga. steel strip with safety edges. One pair of braces are bolted together at center to form an "X". Ends are rounded and pierced for mounting to rear posts. See technical data on page 42-43 for bracing information

Part No.	W	D	Н	Stoc	ck Co	olor
5342-44	36"	-	-	HG	PL	-
5342-55	42"/48"	-		HG	PL	-

SIDE SWAY BRACES

1" x 11 ga. steel strip with safety edges. One pair of braces are bolted together at the center to form an "X". Ends are rounded and pierced for attaching to front and rear posts in the side position. See technical data on page 42-43 for bracing informa-

11
I


tion.						
Part No.	W	D	Н	Stoc	k Co	olor
5344-12	-	12"	-	HG	-	-
5344-15	-	15"	-	-	-	-
5344-18	-	18"	-	HG	-	-
5344-24	-	24"	-	HG	-	-
5344-30	-	30"	-	-	-	-
5344-36	-	36"	-	-	-	-

SHELVES

Roll formed rectangular tubular shaped front and rear edges with return flanges welded on 3" centers to underside of shelf. Sides are triple flanged. All four corners are lapped and welded. Top pierced to accept dividers.

MEDIUM-DUTY BOX BEAM SHELVES

	Part No.	W	D	Н	0/11/10/11	
					PER SHELF	Stock Color
	5135-3612	36"	12"	-	500	HG
2	5135-3618	36"	18"	-	500	HG
	5135-3624	36"	24"	-	500	HG
	5135-4812	48"	12"	-	375	HG
	5135-4818	48"	18"		375	HG
	5135-4824	48"	24"	-	350	HG



HI-TECH & H-POST COMPONENTS

GREENGUARD	Fia	10 V
GOLD	Hallow	ell-Li

HFAV	Y-DUT	Ү ВОХ	RFAM	SHELV	/FS
	1-001	I DOV	DLAW	SHEL	

	Part No.	W	D	Н	CAPACITY	Ctor		Color
	F100 0/10	2/"	101		PER SHELF			Color
	5138-3612	36"	12"	-	800	HG	-	-
	5138-3615	36"	15"	-	800	-	-	-
	5138-3618	36"	18"	-	800	HG	PL	-
	5138-3624	36"	24"	-	800	HG	PL	-
è.	5138-3630	36"	30"	-	500	-	-	-
	5138-3636	36"	36"	-	500	-	-	-
	5138-4212	42"	12"	-	600	-	-	-
	5138-4215	42"	15"	-	600	-	-	-
	5138-4218	42"	18"	-	600	-	-	-
	5138-4224	42"	24"	-	600	-	-	-
	5138-4230	42"	30"	-	625	-	-	-
	5138-4232	42"	32"	-	575	-	-	-
	5138-4236	42"	36"	-	475	-	-	-
	5138-4812	48"	12"	-	400	HG	-	-
	5138-4815	48"	15"	-	425	-	-	-
	5138-4818	48"	18"	-	450	HG	PL	-
	5138-4824	48"	24"	-	500	HG	PL	-
	5138-4830	48"	30"	-	500	-	-	-
	5138-4836	48"	36"	-	500	-	-	-

EXTRA HEAVY-DUTY BOX BEAM SHELVES

Part No.	W	D	Η	CAPACITY PER SHELF	Sto	ck (Color
5139-3612	36"	12"	-	1100	HG	-	-
5139-3615	36"	15"	-	1100	-	-	-
5139-3618	36"	18"	-	1200	HG	PL	-
5139-3624	36"	24"	-	1250	HG	PL	-
5139-3630	36"	30"	-	900	-	-	-
5139-3636	36"	36"	-	900	-	-	-
5139-4212	42"	12"	-	1100	-	-	-
5139-4215	42"	15"	-	1100	-	-	-
5139-4218	42"	18"	-	1050	-	-	-
5139-4224	42"	24"	-	900	-	-	-
5139-4230	42"	30"	-	1000	-	-	-
5139-4232	42"	32"	-	900	-	-	-
5139-4236	42"	36"	-	900	-	-	-
5139-4812	48"	12"	-	750	HG	-	-
5139-4815	48"	15"	-	750	-	-	-
5139-4818	48"	18"	-	900	HG	PL	-
5139-4824	48"	24"	-	900	HG	PL	-
5139-4830	48"	30"	-	750	-	-	-
5139-4836	48"	36"	-	750	-	-	-

BACK PANELS 24 GAUGE

5110-4806 48"

5110-4807 48"

Two piece sections punched on 1" centers at vertical edges and center for mounting on back of posts and shelves in models up to 48" wide.								
•		-		.				
Part No.	W	D	Н	Stoc	ck C	olor		
5110-3603	36"	-	3'-3"	HG	-	-		
5110-3606	36"	-	6'-3"	HG	-	-		
5110-3607	36"	-	7'-3"	HG	-	-		
5110-4203	42"	-	3'-3"	-	-	-		
5110-4206	42"	-	6'-3"	-	-	-		
5110-4207	42"	-	7'-3"	-	-	-		
5110-4803	48"	-	3'-3"	HG	-	-		

-NOTE: Backs greater than 3'-3" will be shipped in multiple pieces.

6'-3"

7'-3"

HG -

HG - -

-

BACK PANELS 18 GAUGE

Two piece sections punched on 1" centers at vertical edges and									
center for mounting on back of posts and shelves in models up to									
48" wide.									
Dant Ma	147	D		Charle Calan					

Part No.	VV	D	Н	2100	CK COI	or
5110-3603-18	36"		3'-3"	-	PL	-
5110-3607-18	36"		7'-3"	-	PL	-
5110-4803-18	48"		3'-3"	-	PL	-
5110-4807-18	48"		7'-3"	-	PL	-
NOTE: Backs gre	ater than 3'-	3" will be	shipped i	n mul	tiple pie	eces.

BACK PANEL CLIPS

Formed to fit bottom flange of standard shelf and tabbed to pick holes in center of back panel section. Holds back panel to she and prevents panel bowing.								
Part No.	W	D	Н	Stock Color				
5120	-	-	-	Plated				

BASE STRIPS

Shaped to fit directly between bottom shelf and floor. 2-15/16" high giving an overall base height including bottom shelf of 3".								
Part No.	W	D	Н	Stoc	k C	olor		
5233-36	36"	-	-	HG	-	-		
5233-42	42"	-	-	-	-	-		
5233-48	48"	-	-	HG	-	-		

SIDE PANELS

Two piece panels are bolted to standard Beaded, Angle and Tee Posts when solid sides are required.

Part No.	W	D	Н	Stock	Color
5093-1203	-	12"	3'-3"	HG ·	· -
5093-1206	-	12"	6'-3"	HG ·	
5093-1207	-	12"	7'-3"	HG ·	
5093-1507	-	15"	7'-3"		
5093-1803	-	18"	3'-3"	HG ·	
5093-1806	-	18"	6'-3"	HG ·	
5093-1807	-	18"	7'-3"	HG ·	
5093-2403	-	24"	3'-3"	HG ·	· -
5093-2406	-	24"	6'-3"	HG ·	
5093-2407	-	24"	7'-3"	HG ·	
5093-3007	-	30"	7'-3"		
5093-3607	-	36"	7'-3"		-

Red Part Number Denotes Stock Component Quick-Ship Color Availability As Noted For Each Component


com



HI-TECH & H-POST COMPONENTS

SWINGING DOORS (WITH LOCKS)





UNIVERSAL CLIP TO MOUNT DOORS

Available in sets of 6. One set required to mount swinging doors to beaded front posts.								
()	Part No.	W	D	Н	Stock Color			
61	5315	-	-	-	Plated			
100								

WELDED END PANELS

Sections consisting of beaded front post, angle back post and one-piece side panel. For individual models or starting and ending models in a continuous shelving row. Factory welded.

	Part No. W D H Stock Color							
_	5092-1203W		12"	3'-3"	010		5101	
		-			-	-	-	
	5092-1206W	-	12"	6'-3"	-	-	-	
	5092-1207W	-	12"	7'-3"	-	-	-	
	5092-1208W	-	12"	8'-3"	-	-	-	
	5092-1210W	-	12"	10'-3"	-	-	-	
	5092-1507W	-	15"	7'-3"	-	-	-	
	5092-1803W	-	18"	3'-3"	-	-	-	
	5092-1806W	-	18"	6'-3"	-	-	-	
	5092-1807W	-	18"	7'-3"	-	-	-	
	5092-1808W	-	18"	8'-3"	-	-	-	
	5092-1810W	-	18"	10'-3"	-	-	-	
	5092-2403W	-	24"	3'-3"	-	-	-	
	5092-2406W	-	24"	6'-3"	-	-	-	
	5092-2407W	-	24"	7'-3"	-	-	-	
	5092-2408W	-	24"	8'-3"	-	-	-	
	5092-2410W	-	24"	10'-3"	-	-	-	
	5092-3007W	-	30"	7'-3"	-	-	-	
	5092-3607W	-	36"	7'-3"	-	-	-	

LABEL HOLDERS

DARK GRAY

Pierced for attaching to front flange of shelves with top and bottom edges folded over to accommodate labels approximately 1" high.

Part No.	VV	D	Н	Sto	CK C	olor	
5370-3601	36"	-	1"	-	-	-	
5370-4201	42"	-	1"	-	-	-	
5370-4801	48"	-	1"	-	-	-	

711 Light gray

(PL)



		WELDED T-PANELS
-in		Sections consisting of beaded front post, back T-Post and one- piece side panel. For use when adjoining models are added to form a continuous shelving row. Factory welded.
	10.	form a continuous shelving row. Factory welded.

0 10

2

1	form a continuous shelving row. Factory welded.							
	Part No.	W	D	Н	Sto	ock Co	olor	
	5094-1203W	-	12"	3'-3"	-	-	-	
	5094-1206W	-	12"	6'-3"	-	-	-	
	5094-1207W	-	12"	7'-3"	-	-	-	
	5094-1208W	-	12"	8'-3"	-	-	-	
	5094-1210W	-	12"	10'-3"	-	-	-	
	5094-1507W	-	15"	7'-3"	-	-	-	
	5094-1803W	-	18"	3'-3"	-	-	-	
	5094-1806W	-	18"	6'-3"	-	-	-	
	5094-1807W	-	18"	7'-3"	-	-	-	
	5094-1808W	-	18"	8'-3"	-	-	-	
	5094-1810W	-	18"	10'-3"	-	-	-	
	5094-2403W	-	24"	3'-3"	-	-	-	
	5094-2406W	-	24"	6'-3"	-	-	-	
	5094-2407W	-	24"	7'-3"	-	-	-	
	5094-2408W	-	24"	8'-3"	-	-	-	
	5094-2410W	-	24"	10'-3"	-	-	-	
	5094-3007W	-	30"	7'-3"	-	-	-	
	5094-3607W	-	36"	7'-3"	-	-	-	
_								

BIN FRONTS

Offset type with scope over shel		op and trip	ole flange	at boti	tom to	tele-
Part No.	W	D	Н	Sto	ock Co	olor
5220-3601	36"	-	1"	-	-	-
5220-3603	36"	-	3"	-	-	-
5220-4203	42"	-	3"	-	-	-
5220-4803	48"	-	3"	-	-	-
0220 1000	10		0			

PARTIAL DIVIDERS

Offset type with bead at top and triple flange at bottom to tele-							
scope over shell	f flange.						
Part No.	W	D	Н	Sto	ock C	olor	
5250-1202	-	12"	2"	-	-	-	
5250-1204	-	12"	4"	-	-	-	
5250-1802	-	18"	2"	-	-	-	
5250-1804	-	18"	4"	-	-	-	

FULL DIVIDERS

Front edge beade	d. Top	, bottom and	l rear are f	langed.	
Part No.	W	D	Н	Stock Co	olor
5240-1206	-	12"	6"	HG -	-
5240-1209	-	12"	9"	HG -	÷
5240-1212	-	12"	12"	HG -	÷
5240-1806	-	18"	6"	HG -	÷
5240-1809	-	18"	9"	HG -	÷
5240-1812	-	18"	12"	HG -	÷
5240-2406	-	24"	6"	HG PL	÷
5240-2407.5	-	24"	7.5"	- PL	÷
5240-2409	-	24"	9"	HG -	÷
5240-2410.5	-	24"	10.5"	- PL	1.0
5240-2412	÷.,	24"	12"	HG PL	-

Red Part Number Denotes Stock Component

707 MARINE BLUE

ſMR

Quick-Ship Color Availability As Noted For Each Component

00.000.00

5

HI-TECH & H-POST COMPONENTS

Hallowell[®]

	R
C	

NYLON BUTTONS

Available in sets of 6. One set required to mount swinging doors to beaded front posts. Part No. W D H Stock Color 5260 - - - - -



Used for high-density shelving requirements. Used with standard Hi-Tech shelving components side sway braces (5341).

Order H-Posts	front and	back. Winin	num ordei	r 100 p	osts.	
Part No.	W	D	Н	Sto	ck C	olor
5003-7	1-1/2"	2-15/16"	7'-3"	-	-	MB
5003-8	1-1/2"	2-15/16"	8'-3"	-	-	-
5003-10	1-1/2"	2-15/16"	10'-3"	-	-	MB
5003-12	1-1/2"	2-15/16"	12'-3"	-	-	-

150		
-) ~ 0	\sim	

1

H-POST SPLICES

Used to splice	n-posts 10	audeum	signitiequ	
Part No.	W	D	Н	Stock Color
5010	-	-	-	Plated

	H-FUST 31L		I DRAG	LO			
	Used with H	-Posts o	nly.				
17	Part No.	W	D	Н	Sto	ock C	Color
	5341-12	-	12"	-	-	-	-
	5341-15	-	15"	-	-	-	-
\mathbb{W}	5341-18	-	18"	-	-	-	MB
	5341-24	-	24"	-	-	-	MB
	5341-30	-	30"	-	-	-	-
	5341-36	-	36"	-	-	-	-

H-POST SIDE SWAY BRACES

CROSS AI	SLE SUPPOR [.]	TS FOR BEA	DED POSTS

Part No.	W	D	Н	Sto	ock C	olor
CAS-36	40"	1-7/8"	4"	-	-	-
CAS-48	52"	1-7/8"	4"	-	-	-

CROSS AISLE SUPPORTS FOR H-POSTS

Part No.	W	D	Н	Sto	ck C	olor
5910-36	35 7/8"	1-7/8"	4"	-	-	-
5910-48	47 7/8"	1-7/8"	4"	-	-	-

	CROS	SS AISLE	SUPPOR	T BRA	CKETS	;		
00		Part No.	W	D	Н	Sto	ock C	olor
000		5914	3 1/2"		3"	-	-	-

Red Part Number Denotes Stock Component Quick-Ship Color Availability As Noted For Each Component

DOWN AISLE SUPPORTS FOR BEADED POSTS & H-POSTS

Part No.	W	D	Н	Sto	ock C	olor
5905-36	35 3/4"	1-7/8"	4"	-	-	-
5905-48	47 3/4"	1-7/8"	4"	-	-	-

	DOW	/N AISLE	SUPPOR	RT BRAG	CKETS			
00		Part No.	W	D	Н	Sto	ck C	olor
0000		5912	1 7/8"	1-7/8"	3"	-	-	-

	COMBI	NATION	CLIPS		
e P.	Part No.	W	D	Н	Stock Color
	5027				Plated

SIDE PANELS 24 GAUGE FOR H-POST

Fabricated from 24 gauge cold rolled sheet steel, field bolted to front and back posts. Provide at all side locations for closed shelving sections. For heights greater than 3'-3", multiple

	sections will be provided to achieve height.							
	Part No.	W	D	Н	Sto	ck C	olor	
	5091-1207		12"	7'-3"	-	-	-	
	5091-1507		15"	7'-3"	-	-	-	
1	5091-1803		18"	3'-3"	-	-	-	
	5091-1806		18"	6'-3"	-	-	-	
	5091-1807		18"	7'-3"	-	-	-	
	5091-2403		24"	3'-3"	-	-	-	
/	5091-2406		24"	6'-3"	-	-	-	
	5091-2407		24"	7'-3"	-	-	-	
	5091-3007		30"	7'-3"	-	-	-	
	5091-3607		36"	7'-3"	-	-	-	

SIDE PANELS 18 GAUGE FOR H-POST

Fabricated from 18 gauge cold rolled sheet steel, field bolted to front and back posts. Provide at all side locations for closed shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve beingt

1. 1	sections will be p	rovia	ed to achieve	neight.			
	Part No.	W	D	Ĥ	Sto	ck C	olor
	5091-1803-18		18"	3'-3"	-	-	MB
	5091-1807-18		18"	7'-3"	-	-	MB
	5091-2403-18		24"	3'-3"	-	-	MB
	5091-2407-18		24"	7'-3"	-	-	MB

CONNECTION STRIPS-ROW ENDS									
••	Part	No.	W	D	Н	Sto	ock Co	olor	
	5114	1-39	2"		38-5/8"	-	PL	-	
	5114	-42	2"		41-5/8"	-	PL	-	
	5114	1-45	2"		44-5/5"	-	PL	-	
	5114	1-51	2"		50-5/8"	-	-	-	
	5114	1-63	2"		62-5/8"	-	-	-	
	5114	1-75	2"		74-5/8"	-	-	-	

CONNECTION STRIPS-INTERMEDIATE

• • •	Part No.	W	D	Н	Sto	ock Co	olor
•••	5115-39	3"		38-5/8"	-	PL	-
	5115-42	3"		41-5/8"	-	PL	-
M	5115-45	3"		44-5/5"	-	PL	-
TH	5115-51	3"		50-5/8"	-	-	-
• • •	5115-63	3"		62-5/8"	-	-	-
• • •	5115-75	3"		74-5/8"	-	-	-

H-POST FOOT PLATE-MEDIUM/LIGHT DUTY

Part No.	W	D	Н	Stock Color
5025	3-1/2"	2-1/4"	1/8"	Plated

FOOT PLATES FOR BEADED, ANGLE, AND T-POSTS

6	11 gauge with 14 gauge mounting bracket welded to top for bolting to post. Has 7/16" diameter. Hole for floor anchor bolts.						
10x	Part No.	W	D	Н	Stock Color		
	5050	3-1/2"	2-1/4"	1/8"	Plated		

SHIM PLATES-MEDIUM/LIGHT DUTY

5026

Part No

5032

Part No. W D н Stock Color 3-1/2" 2-1/4" 1/16" Plated

FOOT PLATES FOR BEADED, ANGLE, AND T-POSTS **EXTRA HEAVY-DUTY**



W Stock Color D Н Plated 5-1/2" 2-3/8 3/16

SHIM PLATES FOR BEADED, ANGLE, AND T-POSTS **EXTRA HEAVY-DUTY**

6
6
~ ~/

Stock Color Part No. W D Н 5033 5-1/2" 2-3/8" 1/16" Plated

H-POST FOOT PLATE (HEAVY-DUTY)

2	Mounting bracket welded to top for bolting inside									
	H-Posts									
22	Part No.	W	D	Н	Stock Color					
2	5015	4"	3-1/2	3/8"	Plated					

H-POST SHIM PLATE

	Fits under foot plate (Part no. 5015) for leveling.								
	Part No.	W	D	Н	Stock Color				
\geq	5016	4"	3-1/2	1/16"	Plated				
/		•	0=						

COMPONENT SPECIFICATIONS

Beaded Front Posts:

Fabricated from 14 gauge cold rolled steel and roll formed into an 11/16" wide x 2-9/16" deep tubular section. Rear flanges are welded on 6" centers to provide maximum strength. Sides of the post are punched 1-1/2" on center with 3/8" x 7/8" rectangular slots to receive shelf clip. Rear flanges of the post have holes punched on 3" centers for the attachment of side sway braces or field attached solid side panels. Provide (1) Beaded Front Post between each adjoining section and at row ends.

Angle Back Posts:

Fabricated of 14 gauge cold rolled steel and roll formed into a modified unequal angle shape. The long leg shall have holes punched on 1-1/2" centers with 3/8" x 7/8" rectangular slots to receive shelf clip. The leading edge shall have holes punched on 3" centers for the attachment of side sway braces. The short leg shall have holes punched on 3" centers for the attachment of back sway braces or back panels. Provide (1) Angle Back Post at each row end for open-type shelving applications.

T-Posts:

Shall be fabricated of two angle back posts. The posts are welded together backto-back to form a "T". Welds are on 6" centers for maximum strength. Posts are used for intermediate back post applications. Provide (1) T Post between each adjoining section for open-type shelving applications.

Post Splice Channels:

(For Beaded Front Posts, Angle Posts, and T-Posts) Fabricated from 16 gauge cold rolled steel and formed into a 11/32" x 1-1/8" x 11/32" channel. 1-1/8" flange is punched with four holes for assembling to upper and lower posts. Provide at all post splices when additional height is required.

H-Posts:

Fabricated from 14 gauge cold rolled steel and roll formed into an 1-1/2" wide x 2-15/16" deep tubular section. Rear flanges are welded on 6" centers to provide maximum strength. Sides of the post are punched 1-1/2" on center with 3/8" x 7/8" rectangular slots to receive shelf clip. Rear flanges of the post have holes punched on 3" centers for the attachment of side sway braces or field attached solid side panels. Post front is slotted on 3" centers for beam connection and combination clip attachment and is punched on 3" centers for field attached back connector strips. Provide (2) H-Posts between each adjoining section and at row ends.

H-Post Splice:

Fabricated from two pieces of 16 gauge cold rolled steel formed into two special channel shapes that are spot welded together to form a 9-3/4" long connector. Splice inserts into post and include 6 holes for bolting to posts.

Side Sway Braces:

1" x 11 gauge cold rolled steel strip with safety edges to eliminate sharpness. The center of two identical pieces shall be punched to be bolted together forming an "X". Ends shall be rounded and punched for attaching to front and back posts. Provide between adjoining sections and at row ends for open-type shelving applications.

Back Sway Braces:

1" x 11 gauge cold rolled steel strip with safety edges to eliminate sharpness. The center of two identical pieces shall be punched to be bolted together forming an "X". Ends shall be rounded and punched for attaching to two back posts. Provide at back of all open-type shelving applications.

Back Panels:

Fabricated from 24 gauge cold rolled sheet steel. The two outer edges and the center shall be punched with 5/16" diameter holes on 1" centers running vertically for assembling to back posts. The center row is used to attach to rear of shelf using Back Clips. Provide at back of closed-type shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve height.



Red Part Number Denotes Stock Component Quick-Ship Color Availability As Noted For **Each Component**

Hallowell-List.com

Side Panels:

Fabricated from 24 gauge cold rolled sheet steel, field bolted to front and back posts. Provide at all side locations for closed shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve height.

End Panels:

Fabricated from 24 gauge cold rolled sheet steel, factory bolted to a Beaded Front Post and an Angle Back Post. Provide at row ends of closed-type shelving applications or where closed ends are desired on open-type shelving applications. For heights greater than 3'-3", multiple sections will be provided to achieve height.

T-Panels:

Fabricated from 24 gauge cold rolled sheet steel factory bolted to a Beaded Front Post and two angle back Posts. Provide between sections of closed-type shelving applications. For heights greater than 3'-3", multiple sections will be provided to achieve height.

Hi-Tech Foot Plate for Beaded, Angle and T-posts #5050

 $3-1/2'' \times 2-1/4'' \times 12$ gauge steel plate with angle bracket welded on top. The angle bracket is punched for fastening to front and back posts. The plate shall have a 7/16'' diameter hole punched on one end for floor anchoring and a 3/8'' diameter hole on the other end for shim plate alignment. Provide as required for floor anchoring or when shimming is required for a level installation

Hi-Tech/H-Post Foot Plate Shim Medium/Light Duty #5026

 $3-1/2'' \times 2-1/4'' \times 16$ gauge cold rolled sheet steel. Fabricated to fit under the foot plate. One end is embossed to fit into the embossment hole in the foot plate to keep them properly aligned. The other end shall have a 7/16'' diameter hole to allow floor anchoring. Provide as required when shimming is required for a level installation.

Hi-Tech Foot Plate Extra Heavy Duty #5032

 $5-1/2'' \times 2-3/8'' \times 7$ gauge steel plate with angle bracket welded on top. The angle bracket is punched for fastening to front and back posts. The plate shall have a 7/16'' diameter hole punched in both ends for floor anchoring. Provide as required for floor anchoring or when shimming is required for a level installation.

Hi-Tech Foot Plate Shim Extra Heavy Duty #5033

 $5-1/2" \times 2-3/8" \times 16$ gauge cold rolled sheet steel. Fabricated to fit under the Foot Plate. One end is embossed to fit into the embossment in the Foot Plate to keep them properly aligned. The other end shall have a 7/16" diameter hole to allow floor anchoring. Provide as required when shimming is required for a level installation.

H-Post Foot Plates Medium/Light Duty #5025

 $3-1/2" \times 2-1/4" \times 11$ gauge steel plate with U-bracket welded on top. The bracket is punched for fastening to H- posts. The plate shall have a 7/16" diameter hole punched on one end for floor anchoring and a 3/8" diameter hole on the other end for shim plate alignment. Provide as required for floor anchoring or when shimming is required for a level installation.

H-Post Foot Plate Heavy Duty #5015

4" x 3-1/2" x 3/8" steel plate with U-bracket welded on top. The bracket is punched for fastening to H- posts. The plate shall have 7/16" diameter holes punched for floor. Provide as required for floor anchoring or when shimming is required for a level installation.

Heavy Duty H-Post Foot Plate Shim #5016

 $4'' \times 3-1/2'' \times 16$ gauge cold rolled sheet steel. Fabricated to fit under the foot plate. Shall have a 7/16'' diameter holes to allow floor anchoring and one emboss for alignment. Provide as required when shimming is required for a level installation.

Shelves - Medium Duty:

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 0 shelves are fabricated from cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers From left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 500 pounds.

Shelves - Heavy Duty:

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 1 shelves are fabricated from heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 800 pounds.

Shelves - Extra Heavy Duty:

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 2 shelves are fabricated from extra heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 1,200 pounds.

Shelf Clips:

Shall be a one piece compression clip drawn from 13 gauge cold rolled steel and zinc plated. Fits snugly against side of post to hold shelves in place. Provide four per shelf.

Base Strip:

Made from 22 gauge cold rolled steel offset at top to fit behind the front flange of shelf. Punched for bolting to holes in the front flange of shelf. Bottom is flanged to resist bending.

Label Holders:

Made from 22 gauge cold rolled steel. Punched on ends and center for attaching to the front edge of shelves with top and bottom edges folded over to accommodate labels approximately 1" high.

Bin Fronts:

Fabricated from 18 gauge cold rolled steel. The top edge is formed into a bead. The bottom shall be triple flanged to telescope over shelf flange and punched to provide a means of attaching to shelf.

Full Dividers:

Fabricated from 24 gauge cold rolled steel. The front edge is beaded. Top and bottom shall be flanged and punched to provide a means of attaching to shelves. The back edge is flanged to provide rigidity. Dividers are installed using snap-in nylon fasteners.

Partial Dividers:

Fabricated from 22 gauge cold rolled steel. The top corners are rounded for increased safety. The bottom flange is punched to provide a means of attaching to shelf. Dividers are installed using snap-in nylon fasteners.

Swinging Doors:

Fabricated from 20 gauge cold rolled steel with box flanges on all four edges. Swinging doors shall be reinforced with a steel pan type panel inside the door. Doors are bolted to a welded door frame consisting of top and bottom channels and angles at the sides. The door frame side angles are punched on 1" centers for attachment. Universal Clips shall be supplied to attach door & frame assembly to the Beaded Front Posts. One chrome finished turn handle with built-in cylinder key lock shall be included providing three point positive locking.

Universal Clip:

Fabricated from 16 gauge cold rolled steel formed into an angle with three slotted holes on one flange and one long slot in the other flange, which is also offset to fit in Beaded Front Post. Provide when Swinging Doors are required.

MULTI-LEVELHIGH-RISE SHELVING SYSTEMS

MULTI-LEVEL HIGH-RISE SHELVING SYSTEMS

Complete high-rise modular systems make it easy to create that perfect shelving solution to maximize space in any facility.

Shelving Supported Mezzanines (Deck-over shelving)



Save space by going up instead of out! Maximize your warehouse efficiency by using it's full capacity wall-to-wall and floor-to-ceiling. By using our Hi-Tech, Rivetwell, Bulk Rack and H-Post shelving Systems, we are able to double and or even triple your usable square footage instantly.

Multi-level shelving (Cat Walk System)

Using pre-engineered components, we can create a customized multi-level shelving system to meet your specific needs at a fraction of the cost of constructing a conventional mezzanine.





Hallowe

Hallowell-List.com

Multiple Products for Multiple Applications



- High Bay Storage Systems
 Shelving Supported Pick Modules
- Shelving Supported Latwalk Systems
- ✓ Safety Guard Rail Systems

Hi-Tech shelving is a complete shelving line with the strength needed to handle most industrial applications and versatility for today's modern facilities. Every shelving unit is designed and engineered to meet the highest standards. A full complement of accessories including full dividers, partial dividers, label holders, swinging doors, post splices for multilevel systems and foot plates are available to complete your system.

HiTech H-Post Shelving (Floor + 2 Catwalk System)




Welded Bulk Rack (2 Level Catwalk System)



Beaded Post / Angle Post (Floor + 2 Catwalk System)





Challenge Us To Meet Your Storage Goals!


Efficient Cost Effective Designs... Experienced Sales Engineering Surveys... Local Sales Support Across the Country... Stock Products in 6 Distribution Centers Nationwide Call 866-566-0500 or Email info@Hallowell-List.com

Hallowell-List.com

HI-TECH & H-POST LAYOUT AND GROWTH INFORMATION


SYSTEM LAYOUT INFORMATION

Standard Shelving with Hi-Tech Shelves

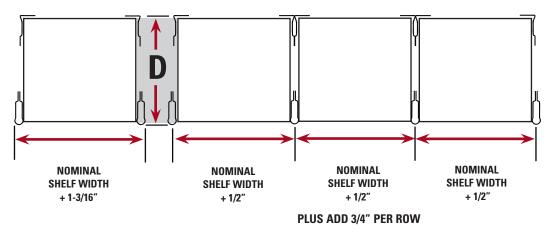

FOR "D" - SINGLE FACE ADD 3/16" TO NOMINAL SHELF DEPTH FOR "D" - DOUBLE FACE ADD 3/8" TO NOMINAL SHELF DEPTH

H-Post Shelving with Hi-Tech Shelves

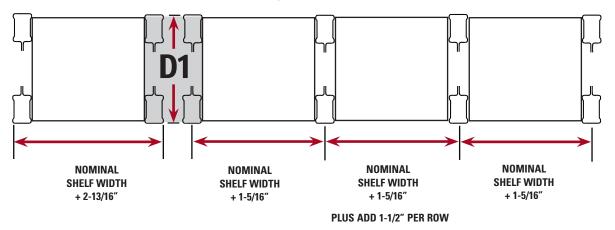

FOR "D1" - SINGLE FACE ADD 5/16" TO NOMINAL SHELF DEPTH FOR "D1" - DOUBLE FACE CLOSED MODELS ADD 13/16" TO NOMINAL SHELF DEPTH FOR "D1" - DOUBLE FACE OPEN MODELS ADD 29/32" TO NOMINAL SHELF DEPTH NOTE: ACTUAL SHELF WIDTH IS 5/16" UNDER NOMINAL


NOTES:

- 1. Width of posts should be added to the nominal shelf width in any floor plan to determine the overall shelving width.
- 2. Check "D" and "D1" dimensions for depth/creepage.

HI-TECH & H-POST **TECHNICAL DATA**



UNIT LOAD CAPACITY INFORMATION - 1.92 SAFETY FACTOR

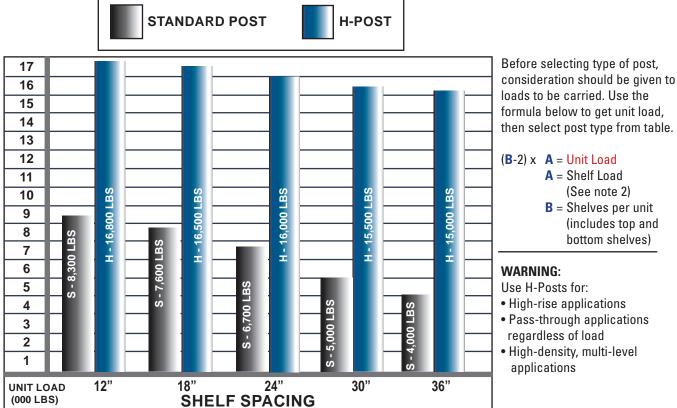





TYPICAL SWAY BRACE INSTALLATIONS FOR SEISMIC ZONE NO. 0 & 1

Standard Shelving (Beaded Front Posts)

High-Density Shelving (H-Posts)



Use of Side Sway Braces (Part No. 5344 - Standard Shelving) (Part No. 5341-High-Density Shelving)



Use of Back Sway Braces (Part No. 5342) for both standard and high density shelving

NOTES: 1-When splicing posts for increased heights or for multi-level shelving, use the proper number of braces required for the height of the posts being added. Example: a 10'-3" model increased another 10'-3" in height would require 4 sets of side sway braces and 4 sets of back braces. 2-For additional bracing requirements in Seismic Zones No. 2, 3 and 4, consult the Hallowell Applications Engineering Department.



H-POST BULK RACK





FEATURES:




3 shelf levels per unit adjust on 3" centers



Welded uprights consist of 14 gauge channel bracing welded to H-Post vertical members



14 gauge steel step beams with 10 gauge brackets



14 gauge front-to-back formed angle bracing supports



BEAMS & STEEL	POSTS &
DECKING	UPRIGHTS
711	707
Light gray (PL)	MARINE BLUE (MB)

Choice of optional particle board, waterfall wire and steel shelf decking





	Inial	lowe	
• •	Hallow	ell-List.c	on

123" High







UNIT COMPONENTS:

W	D	*Capacity	Adder	Cat. No.	Cat. No.
48	24	3,800	Starter	HBR482487-3S	HBR4824123-3S
48	24	3,800	Adder	HBR482487-3A	HBR4824123-3A
48	36	3,800	Starter	HBR483687-3S	HBR4836123-3S
48	36	3,800	Adder	HBR483687-3A	HBR4836123-3A
48	48	3,800	Starter	HBR484887-3S	HBR4848123-3S
48	48	3,800	Adder	HBR484887-3A	HBR4848123-3A
60	24	3,500	Starter	HBR602487-3S	HBR6024123-3S
60	24	3,500	Adder	HBR602487-3A	HBR6024123-3A
60	36	3,500	Starter	HBR603687-3S	HBR6036123-3S
60		3,500	Adder	HBR603687-3A	HBR6036123-3A
60		3,500	Starter	HBR604887-3S	HBR6048123-3S
			Adder	HBR604887-3A	HBR6048123-3A
	24	•	Starter	HBR722487-3S	HBR7224123-3S
	24			HBR722487-3A	HBR7224123-3A
			Starter	HBR723687-3S	HBR7236123-3S
		,	Adder	HBR723687-3A	HBR7236123-3A
			Starter	HBR724887-3S	HBR7248123-3S
72		,	Adder	HBR724887-3A	HBR7248123-3A
96			Starter	HBR962487-3S	HBR9624123-3S
96		,	Adder	HBR962487-3A	HBR9624123-3A
96			Starter	HBR963687-3S	HBR9636123-3S
					HBR9636123-3A
96		,	Starter	HBR964887-3S	HBR9648123-3S
96	48	3,000	Adder	HBR964887-3A	HBR9648123-3A
EXTRA	LEVELS	;			
48	24	3,800	Level	HBRL4824	
			Level	HBRL4836	
		,	Level	HBRL4848	
60	24	3,500	Level	HBRL6024	
60	36	3,500	Level	HBRL6036	
60	48	3,500	Level	HBRL6048	
72	24	3,500	Level	HBRL7224	
72	36	3,500	Level	HBRL7236	
72	48	3,500	Level	HBRL7248	
96	24	3,000	Level	HBRL9624	
96	36	3,000	Level	HBRL9636	
96	48	3,000	Level	HBRL9648	
	48 48 48 48 48 48 60 60 60 60 60 60 72 72 72 72 72 72 72 72 72 96 96 96 96 96 96 96 96 96 96 96 96 96	48 24 48 24 48 36 48 36 48 48 48 48 60 24 60 36 60 36 60 36 60 48 72 24 72 36 72 48 96 24 96 36 96	48 24 3,800 48 24 3,800 48 36 3,800 48 36 3,800 48 48 3,800 48 48 3,800 60 24 3,500 60 24 3,500 60 36 3,500 60 36 3,500 60 48 3,500 60 48 3,500 60 48 3,500 72 24 3,500 72 24 3,500 72 36 3,500 72 48 3,500 72 48 3,500 72 48 3,500 72 48 3,000 96 24 3,000 96 36 3,000 96 36 3,000 96 48 3,800 48 36 3,800 48 36 3,800 48 3,500	48 24 3,800 Starter 48 24 3,800 Adder 48 36 3,800 Starter 48 36 3,800 Adder 48 36 3,800 Adder 48 48 3,800 Adder 60 24 3,500 Starter 60 24 3,500 Adder 60 36 3,500 Adder 60 36 3,500 Adder 60 36 3,500 Adder 60 48 3,500 Starter 60 48 3,500 Starter 72 24 3,500 Starter 72 36 3,500 Adder 72 36 3,500 Starter 72 48 3,600 Starter 96 24 3,000 Starter 96 36 3,000 Adder 96	W D Capacity Adder Cat. No. 48 24 3,800 Starter HBR482487-3S 48 36 3,800 Adder HBR482487-3A 48 36 3,800 Adder HBR483687-3S 48 36 3,800 Adder HBR483687-3A 48 48 3,800 Adder HBR483687-3A 60 24 3,500 Starter HBR602487-3S 60 24 3,500 Starter HBR602487-3A 60 36 3,500 Adder HBR602487-3A 60 36 3,500 Starter HBR602487-3A 60 36 3,500 Adder HBR604887-3S 60 48 3,500 Starter HBR604887-3A 72 24 3,500 Starter HBR604887-3A 72 24 3,500 Starter HBR604887-3A 72 36 3,500 Starter HBR963487-3S <t< th=""></t<>

Starter

87" High

* Capacity is beam pair capacity and is based on a uniformly distributed load. Includes a 1.65 safety factor

Starter units include 2 upright frames; add-on units include 1 upright frame.

Units with steel deck, wire deck and no deck include 1 front to back support for 48" and 60" wide and 2 for 72" and 96" wide.

Units with particle board deck include 2 front to back supports for 48" and 60" wide and 3 for 72" wide and 4 for 96" wide.



H-POST BULK RACK COMPONENTS & DECKING

Bulk Rack Components	Catalog No.	W	D	н	Stock Color
BULK RACK WELDED UPRIG	HTS				
	5031-2407		24"	87"	MB
	5031-3007		30"	87"	
	5031-3607		36"	87"	MB
	5031-4207		42"	87"	
	5031-4807		48"	87"	MB
	5031-2408		24"	99"	
	5031-3008		30"	99"	
	5031-3608		36"	99"	
	5031-4208		42"	99"	
	5031-4808		48"	99"	
	5031-2410		24"	123"	MB
	5031-3010		30"	123"	
	5031-3610		36"	123"	MB
F	5031-4210		42"	123"	
	5031-4810		48"	123"	MB
FA	5031-2412		24"	147"	
	5031-3012		30"	147"	
	5031-3612		36"	147"	
	5031-4212		42"	147"	
P.	5031-4812		48"	147"	
BULK RACK BEAMS	<u></u>				
	5029-48	48"		3-1/2"	PL
	5029-60	60"		3-1/2"	PL
	5029-72	72"		3-1/2"	PL
	5029-84	84"		3-1/2"	
2.1 III IIII	5029-96	96"		3-1/2"	PL
BULK RACK FRONT TO BAC	K SUPPORTS				
	5030-24	1"	24"	1"	PL
	5030-30	1"	30"	1"	
	5030-36	1"	36"	1"	PL
	5030-42	1"	42"	1"	
	5030-48	1"	48"	1"	PL
		-		-	

6

Catalog No.	w	D	*Capacity
PARTICLE BOA		KING	
HPB4824	48"	24"	530
HPB4830	48"	30"	440
HPB4836	48"	36"	400
HPB4842	48"	42"	300
HPB4848	48"	48"	275
HPB6024	60"	24"	615
HPB6030	60"	30"	520
HPB6036	60"	36"	380
HPB6042	60"	42"	305
HPB6048	60"	48"	230
HPB7224	72"	24"	770
HPB7230	72"	30"	680
HPB7236	72"	36"	655
HPB7242	72"	42"	670
HPB7248	72"	48"	685
HPB9624	96" 06"	24"	1,200
HPB9630 HPB9636	96" 06"	30"	1,180
HPB9642	96" 96"	36" 42"	1,150 1,110
HPB9648	90 96"	42 48"	960
			300
WATERFALL WI	30"	24"	605
HWDW3030	30"	30"	455
HWDW3036	30"	36"	455
HWDW3042	30"	42"	300
HWDW3048	30"	48"	300
HWDW3624	36"	24"	605
HWDW3630	36"	30"	455
HWDW3636	36"	36"	455
HWDW3642	36"	42"	300
HWDW3648	36"	48"	300
HWDW4824	48"	24"	605
HWDW4830	48"	30"	455
HWDW4836	48"	36"	455
HWDW4842	48"	42"	300
HWDW4848	48"	48"	300
- For 60" wide,	use 2 30	" wide	per level.
- For 72" wide, - For 96" wide,	use 2 36	‴ wide	per level.
STEEL SHELF			per level.
HSSD4824	48"	24"	605
HSSD4830	48"	30"	455
HSSD4836	48"	36"	455
HSSD4842	48"	42"	305
HSSD4848	48"	48"	305
HSSD6024	60"	24"	1210
HSSD6030	60"	30"	910
HSSD6036	60"	36"	910
HSSD6042	60"	42"	610
HSSD6048	60"	48"	610
HSSD7224	72"	24"	1210
HSSD7230	72"	30"	910
HSSD7236	72"	36"	910
HSSD7242	72"	42"	610
HSSD7248	72"	48"	610
HSSD9624	96"	24"	1210
HSSD9630	96"	30"	910
HSSD9636	96"	36"	910
HSSD9642	96"	42"	610
HSSD9648	96"	48"	610

* Capacity is based on a uniformly distributed load and includes a 1.65 safety factor



H-POST REEL RACKS



With Hallowell's H-Post as the vertical members of this unique storage rack, our Reel Storage Rack provides the strength and adjustability to store and dispense a wide variety of cable, rope and wire or any other spooled material.







allow

Hallowell-List.com



HEAVY-DUTY AXLE SUPPORTS ADJUST ON 3" CENTERS

• Axle position adjusts in 3" increments to accommodate a variety of spool diameters on the same rack

• Steel frame construction is designed to support 2,000-lbs per axle evenly distributed

• Total unit capacity of 6,000-lbs.

w	D	н	Includes	Starter Unit Cat. No.	Add-On Unit Cat. No.
REEL	STORAG	GE RACK			
36"	36"	99"	(3) 2-3/8" O.D. Axles, 3 Pairs Axle Bracket	HRR363699-3S	HRR363699-3A
48"	36"	99"	(3) 2-3/8" O.D. Axles, 3 Pairs Axle Bracket	HRR483699-3S	HRR483699-3A
36"	36"	123"	(4) 2-3/8" O.D. Axles, 4 Pairs Axle Bracket	HRR3636123-4S	HRR3636123-4A
48"	36"	123"	(4) 2-3/8" O.D. Axles, 4 Pairs Axle Bracket	HRR4836123-4S	HRR4836123-4A



Starter Unit: Consists of 4 H-posts 2 base channels, 3 stabilizing beams, 2 sets of sway braces/gussets and the applicable number of axles and axle bracket pairs.

Adder Unit: Consists of 2 H-posts, 1 base channels, 3 stabilizing beams, 1 set of sway braces/gussets and the applicable number of axles and axle bracket pairs.

BIN SHELVING



Hallowell bin shelving is a great way to organize and manage your parts department. Easily configurable with your favorite bin size, color and style. Each shelving unit is complete with (4) posts, shelves, side and back sway bracing and hardware for easy assembly.

- Shelves adjust in 1" increments
- Many shelf combinations available see chart below
- Easy assembly

allow

Hallowell-List.com

- Sway Braces for added stability
- Durable powder coat finish
- Nut & bolt assembly

FEATURES:

BIN SHELVING UNITS

Angle Post (Standard-Duty):

1-1/8" x 1-5/8", 16 gauge cold rolled steel corner post uprights, 4 per unit.

Shelves:

22 gauge cold rolled steel, Triple flanged, adjust 1" on center.


Sway Braces:

1" wide 14 ga. Steel braces are bolted together at center to form an "X". Ends are rounded and pierced for mounting to rear and side posts.



39" HIGH UNIT (BINS NOT INCLUDED)



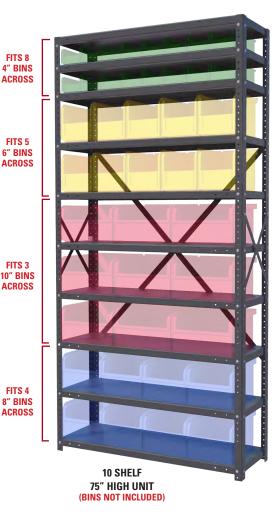

IS NOT INCLUDED)

***PLASTIC BINS NOT INCLUDED**

WIDTH	DEPTH	HEIGHT	NUMBER OF SHELVES	CATALOG NO.	LOAD Capacity	COLOR	В	OMM IN W Y. PE 6″	IDTH	1	*RECOMMENDED BIN HEIGHT RANGE	
39 INC	HIGH	UNITS										
36	12	39	4	HUBS629-4	400 lbs	UG	8	5	4	3	7"- 8"	
36	12	39	5	HUBS629-5	400 lbs	UG	8	5	4	3	5"- 6"	
36	12	39	6	HUBS629-6	400 lbs	UG	8	5	4	3	4"- 5"	
36	18	39	4	HUBS689-4	400 lbs	UG	8	5	4	3	7"- 8"	
36	18	39	5	HUBS689-5	400 lbs	UG	8	5	4	3	5"- 6"	
36	18	39	6	HUBS689-6	400 lbs	UG	8	5	4	3	4"- 5"	
75 INCI	I HIGH	UNITS										
36	12	75	6	HUBS625-6	400 lbs	UG	8	5	4	3	10"-11"	
36	12	75	7	HUBS625-7	400 lbs	UG	8	5	4	3	8"- 9"	
36	12	75	8	HUBS625-8	400 lbs	UG	8	5	4	3	7"- 8"	
36	12	75	10	HUBS625-10	400 lbs	UG	8	5	4	3	5 7/8"- 6"	
36	12	75	13	HUBS625-13	400 lbs	UG	8	5	4	3	3"- 4"	
36	18	75	6	HUBS685-6	400 lbs	UG	8	5	4	3	10"-11"	
36	18	75	7	HUBS685-7	400 lbs	UG	8	5	4	3	8"- 9"	
36	18	75	8	HUBS685-8	400 lbs	UG	8	5	4	3	7"- 8"	
36	18	75	10	HUBS685-10	400 lbs	UG	8	5	4	3	5 7/8"- 6"	
36	18	75	13	HUBS685-13	400 lbs	UG	8	5	4	3	3"-4"	





THE PERFECT TRAFFIC SOLUTION SECURITY • TRAFFIC CONTROL • PORTABILITY

- In Stock for shipment within 5 days of receipt of order
- Quick and easy installation. Install between two walls instantly without anchors to walls or floor
- Simplified, patented pressure lock system
- Floor anchors are not required but are available for special installations
- · Compact, fold-up size and heavy duty swivel casters make moving and storage easy
- Plated finish
- Padlock hasp is standard
- Cylinder locks are available for additional security
- Two or more gates can be joined together for large expanse

Here's how the exclusive Superior® Pressure Lock System works:

- 1. Raise unit retainer channel to vertical position and secure
- 2. Extend gate until rubber bumpers touch both walls
- 3. Lower the male lock channel (with pin) until it rests on carriage channels within guides and locking bracket.
- 4. Lower female lock channel (with adjustment holes) until it rests within the male lock channel with pin. Pin need not engage a hole in female lock channel.
- 5. Raise both channels until pin engages the hole immediately to the right. Applying moderate pressure, push both channels down until they rest within guides and locking bracket. Lock in position.





Five sizes to accommodate 3'-6" wide to 18'-0" wide conditions. Connect multiple gates together for wider applications.

Model	For Openings	Collapsed Size	Height	Weight (Ibs)
P601-06	3'-6" to 6'-0"	19" x 30"	6'-6-1/2"	193
P601-09	6'-0" to 9'-0"	19" x 30"	6'-6-1/2"	197
P601-12	7'-0" to 12'-0"	24" x 30"	6'-6-1/2"	254
P601-15	11'-0" to 15'-0"	30" x 30"	6'-6-1/2"	311
P601-18	13'-0" to 18'-0"	30" x 30"	6'-6-1/2"	374
PG-CL	Cylinder Locks			
PG-FAA	Floor Anchors			
PG-A	Additional Ancho	rs		



YEAR WARRANTY



GUARDRAIL & GUARDRAIL POSTS

GUARDRAIL

Hallowell guardrail is designed, engineered, and manufactured to the highest industry standards, using heavy gauge steel, and a unique integrated fastening system. This integrated system incorporates the fastening hardware as part of the column design so there will be no "stripped" out connections. A properly installed and anchored guardrail system is designed to safeguard people, property and facility assets from accidents involving material handling equipment.



Steel post cap snaps on providing a durable finished installation



SAFETY Yellow

Description	Nom. Length (Ft.)	Height (in.)	Weight (Lbs.)	Catalog Number
Rail	3'		22	GR-03
Rail	4'		26	GR-04
Rail	5'		35	GR-05
Rail	6'		41	GR-06
Rail	7'		46	GR-07
Rail	8'		53	GR-08
Rail	9'		60	GR-09
Rail	10'		65	GR-10
Post		18"	33	GRPA18-1
Post		42"	51	GRPA42-2
Lift-out rail Ada	pter (pair)		12	LOA
45 Degree Angl	e Bracket		6	45-BRACKET
*Drill Bit	-	-	0.1	17mm-Drill-Bit

* Required to install /anchor posts

Each Hallowell Guardrail system is designed for your specific safety application. It is recommended to use 18" high for impact protection of facility assets including office in-plants, conveyor systems, mezzanines, shelving and racking systems. The use of the 42" double rail system is recommended when protecting and separating pedestrians and personnel from your material handling equipment. These areas include walkways, bathrooms, entry and exit points, electrical panels, break areas, and exposed work stations.

Guardrail components have an industry approved, safety-yellow powder-coated finish. All guardrail sections are shipped with the required fasteners and other necessary hardware to properly install and anchor into your concrete floor.






Grade 5 hex nuts are welded inside posts providing maximum bolt grip for superior installation

Lift-out rail adapter allows for access when needed

HALLOWELL POST PROTECTORS

Designed to protect your investment, Hallowell Post Protectors are fabricated of extra heavy-duty steel and are available in three heights to meet your specific requirements. Anchor plates are 1/4" steel that is welded to 3/8" formed steel uprights and finished in a bright safety-yellow powder coat.





7" x 7" x 1/4" Base Plate with the industry's widest throat increasing space between rack post and protector allowing protector to absorb impact without hitting the post

SLIMLINE **STEEL CABINETS**





Features:

- · All components precision engineered with no bolt heads showing on front and side panels.
- Storage 3 adjustable full-width shelves 2 shelves in 42" high
- 2-1/2" 5-knuckle hinges
- 22-ga. Steel Construction
- Double door design, Single Door for 18" wide
- Flush mounted, recessed, squeeze latch handle
- Includes lock with 2 keys
- 16-ga. Frame
- Shelf capacity up to 150 lbs
- Shelves adjust on 2" centers
- Durable Powder-coated finish







Description	Width	Depth	Height	Knock-Down Cat No.	Assembled Cat No.	Color Selection
SLIMLINE SOLID D	OOR CABINE	TS				
Slimline, Storage Slimline, Storage Slimline, Storage	18 24 30	18 18 15	66 66 66	610S181866 610S241866 610S301566	610S181866A 610S241866A 610S301566A	HG,PL,ME HG,PL,ME HG,PL,ME
STOCK COLOR	725 Dark gray (hg)	71 LIGHT (P	GRAY	708 Black (Mej		

allowe

Hallowell-List





COMMERCIAL KD CABINETS

Features:

- All components precision engineered with no bolt heads showing on front and side panels
- Body and shelves fabricated from 22 gauge steel
- Shelves easily adjust up or down in 2" increments Triple flanged shelf front for added strength (capacity up to 200 lbs)
- Reinforced doors swing a full 180°

• Storage (includes 4 adjustable shelves

• Wardrobe (includes 1 shelf and coat rod

• Combination (includes 1 full width shelf, 3 half width shelves and a half width coat rod

Configurations:

- Doors are factory-hung in 16 gauge frames ensuring proper performance
- 16 gauge continuous hinges
- Corner foot gussets provide added rigidity and stability (replaced by mounting plates on mobile units)
- Positive three-point locking (top, center and bottom) for secure locking
- Plated locking handle has built-in cylinder key lock (keys included)
- Mobile units include four heavy-duty locking swivel casters.

24" Deep Storage Cabinets are available in stationary and mobile versions.

Door Options:

• Solid

YEAR

• Safety-View (includes polycarbonate panels in door)







BLACK

DARK GRAY SAFETY-VIEW DOORS TAN







FUNCTIONAL • DURABLE • ADAPTABLE



400 & 405 SERIES COMMERCIAL CABINETS

MOBILE STORAGE

STATIONARY WARDROBE

STATIONARY COMBINATION

Description	Width	Depth	Height	Knock-Down Cat No.	Assembled Cat No.	Colors Standard Finish		
SOLID DOOR CABINET	SOLID DOOR CABINETS, 400 SERIES							
Stationary, Storage	36	18	72	415S18	415S18A	ME, HG, PT		
Stationary, Storage	36	24	72	415S24	415S24A	ME, HG, PT		
Stationary, Storage	48	18	72	425S18	425S18A	ME, HG		
Stationary, Storage	48	24	72	425S24	425S24A	ME, HG, PT		
Stationary, Wardrobe	36	18	72	435W18	435W18A	ME, HG, PT		
Stationary, Wardrobe	36	24	72	435W24	435W24A	ME, HG, PT		
Stationary, Wardrobe	48	18	72	445W18	445W18A	ME, HG		
Stationary, Wardrobe	48	24	72	445W24	445W24A	ME, HG, PT		
Stationary, Combination	36	18	72	455C18	455C18A	ME, HG, PT		
Stationary, Combination	36	24	72	455C24	455C24A	ME, HG, PT		
Stationary, Combination	48	18	72	465C18	465C18A	ME, HG		
Stationary, Combination	48	24	72	465C24	465C24A	ME, HG, PT		
Mobile, Storage	36	24	72	415S24M	415S24MA	ME, HG, PT		
Mobile, Storage	48	24	72	425S24M	425S24MA	ME, HG, PT		
SAFETY VIEW DOOR C	ABINETS	6, 400 SER	IES					
Stationary, Storage	36	18	72	415S18SV	415S18SVA	ME, HG		
Stationary, Storage	36	24	72	415S24SV	415S24SVA	ME		
Stationary, Wardrobe	36	18	72	435W18SV	435W18SVA	ME, HG		
Stationary, Wardrobe	36	24	72	435W24SV	435W24SVA	ME		
Stationary, Combination	36	18	72	455C18SV	455C18SVA	ME, HG		
Stationary, Combination	36	24	72	455C24SV	455C24SVA	ME		
Mobile, Storage	36	24	72	415S24SVM	415S24SVMA	ME		



INDUSTRIAL KD CABINETS

2 WARRANTY

Provides maximum protection to tools, dies, delicate instruments, supplies, and personal belongings. Neat and attractive in appearance. Designed to meet government requirements.

Features:

- All components precision engineered with no bolt heads showing on front and side panels.
- 20 gauge body and 22 gauge shelves provide strength and durability.
- Shelves easily adjust up or down in 2" increments. Triple flanged shelf front for added strength (capacity up to 250 lbs).
- Reinforced doors swing a full 180°.
- Doors are factory-hung in 16 gauge frames ensuring proper performance.

Configurations:

- Storage (includes 4 adjustable shelves)
- Wardrobe (includes 1 shelf and coat rod)
- Combination (includes 1 full width shelf, 3 half width shelves and a half width coat rod)

- 16 gauge continuous hinges.
- Corner foot gussets provide added rigidity and stability (replaced by mounting plates on mobile units).

800 SERIES INDUSTRIAL GRADE STEEL CABINETS

- Positive three-point locking (top, center and bottom) for secure locking.
- Plated locking handle has built-in cylinder key lock (keys included).
- Mobile units include four heavy-duty locking swivel casters.

24" Deep Storage Cabinets are available in stationary and mobile versions.



INDUSTRIAL STRENGTH STORAGE





+MedSafe

Description	Width	Depth	Height	Knock-Down Cat No.	Assembled Cat No.	Colors Standard Finish	Light Gray Antimicrobal Finish
SOLID DOOR CABINET	S, 800 SE	ERIES					
Stationary, Storage	36	18	78	815S18	815S18A	ME, PT, HG	PL-AM
Stationary, Storage	36	24	78	815S24	815S24A	ME, PT, HG	
Stationary, Storage	48	18	78	825S18	825S18A	ME	
Stationary, Storage	48	24	78	825S24	825S24A	ME, PT	
Stationary, Wardrobe	36	18	78	835W18	835W18A	ME, PT, HG	PL-AM
Stationary, Wardrobe	36	24	78	835W24	835W24A	ME, PT, HG	
Stationary, Wardrobe	48	18	78	845W18	845W18A	ME	
Stationary, Wardrobe	48	24	78	845W24	845W24A	ME, PT	
Stationary, Combination	36	18	78	855C18	855C18A	ME, PT, HG	PL-AM
Stationary, Combination	36	24	78	855C24	855C24A	ME, PT, HG	
Stationary, Combination		18	78	865C18	865C18A	ME	
Stationary, Combination	48	24	78	865C24	865C24A	ME, PT	
Mobile, Storage	36	24	78	815S24M	815S24MA	ME, PT, HG	
Mobile, Storage	48	24	78	825S24M	825S24MA	ME, PT	



DURATOUGH™ CLASSIC & GALVANITE SERIES STEEL CABINETS



Classic and Galvanite[™] Series All-Welded Cabinets







Safety-View Door Cabinet

Ventilated Cabinet

Solid Cabinet





FOR REALLY TOUGH INDUSTRIAL APPLICATIONS



DURATOUGH™ CABINETS

Classic Series cabinets are fabricated from prime grade cold rolled sheet steel.

Galvanite Series cabinets are fabricated from galvannealed sheet steel which has a zinc-iron alloy coating that is applied at the mill providing protection against high-humidity and moist environments. This coating also prevents corrosion from spreading when the paint and/or coating is scratched away.

Heavy-Duty cabinets are fabricated from 16 gauge sheet steel and are fully-welded creating a rigid, durable unit.

Extra Heavy-Duty cabinets are fabricated from 14 gauge steel which is 25% thicker than 16 gauge providing **MAXIMUM** durability.

Safety-View® Series cabinets incorporate polycarbonate panels in both doors of our extra heavy-duty Classic Series cabinets allowing contents to be visible without compromising security.

Ventilated Series cabinets are fabricated to the same rugged standards as our extra heavy-duty Classic Series cabinets with the added benefit of being fully ventilated with diamond perforated doors and sides and a 13 gauge flattened expanded metal back.



Storage Cabinet



Combination Cabinet



18-gauge full-height door stiffener provides maximum rigidity to both doors



Heavy-Duty 3/16" thick steel handle with padlock hasp.



1/8" thick latch and 3/8" diameter lock rods insure maximum security

STANDARD FEATURES FOR ALL DURATOUGH™ CLASSIC AND GALVANITE™ SERIES CABINETS

- All-welded construction
- Double door design

Hallowell-List.com

- Solid doors are reinforced with an 18 gauge full-height door stiffener providing a rigid torque-free door.
- 3-point turn handle locking using 3/8" diameter locking rods operated by a 3/16" gauge steel handle. Handle is painted to match cabinet.
- Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges welded to door and securely riveted to frame.
 - Solid sides are formed to be integral with vertical door frame.
- Top is formed to be integral with horizontal top door frame.
- Bottom is formed to be integral with horizontal bottom door frame and includes double return bends at all four sides maximizing unit rigidity.

· Back is welded to cabinet top, bottom and sides

DURATOUGH™ WELDED CABINET ACCESSORIES & FEATURES

- Shelves are formed to provide maximum capacity and are adjustable on 3" centers. Shelves bolt to shelf support channels which are welded to sides.
- 78" high storage cabinets include 4-adjustable shelves
- 60" high storage cabinets include 3-adjustable shelves
- 42" high storage cabinets include 2-adjustable shelves
- 78" high combination cabinets include one full-width upper shelf, a center partition, 3 partial-width shelves and one partialwidth coat rod
- Optional leg kits are available and can be bolted on to all DuraTough cabinets.
- Color: 738 Charcoal

DURATOUGH™ CABINET LEG KITS

Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	Legs Per Kit
HWC4LK-1G-HG	Leg Kit		21	4	2
HWC4LK-4G-HG	Leg Kit		24	4	2

Leg kits can be added to any Hallowell DuraTough Cabinet. Legs are fabricated from galvanneal corrosion resistant steel and are easily bolted to cabinet bottom. Includes hardware for field attachment.



DURATOUGH™ CABINET DRAWERS

Catalog Number	Туре	Width (In)	Depth (In)	Drawer Height
FKSCD36-2CL	2 Drawer	36	24	7.5
FKSCD48-2CL	2 Drawer	48	24	7.5
FKSCD36-3CL	3 Drawer	36	24	5
FKSCD48-3CL	3 Drawer	48	24	5

Note: Drawer units should always be installed into the lower portion of the cabinets to insure stability when opening the drawers. Only one drawer should be opened at a time.





Width Depth Height No. of

DURATOUGH[™] CLASSIC SERIES

Type

Catalog Number

DURATOUGHTM CORROSION RESISTANT GALVANITE SERIES

Hallowell

Catalog Number	alog Number Type		(In)	(In)	Shelves			
HEAVY-DUTY-1								
HW6SC6142-2	Storage	36	21	42	2			
HW6SC6160-3	Storage	36	21	60	3			
HW6SC6178-4	Storage	36	21	78	4			
HW6SC6478-4	Storage	36	24	78	4			
HW6SC8460-3	Storage	48	24	60	3			
HW6SC8478-4	Storage	48	24	78	4			
HW6SC0478-4	Storage	60	24	78	4			
HW6CC6478-4	Combination	36	24	78	4			
HW6CC8478-4	Combination	48	24	78	4			
HW6CC0478-4	Combination	60	24	78	4			
ADDITIONAL SHELVES, HEAVY-DUTY-16 GAUGE								
HW6SCS61	Shelf	36	21		1			
HW6SCS64	Shelf	36	24		1			
HW6SCS84	Shelf	48	24		1			
EXTRA HEAVY-DUTY-14 GAUGE								
HW4SC6142-2	Storage	36	21	42	2			
HW4SC6160-3	Storage	36	21	60	3			
HW4SC6178-4	Storage	36	21	78	4			
HW4SC6478-4	Storage	36	24	78	4			
HW4SC8460-3	Storage	48	24	60	3			
HW4SC8478-4	Storage	48	24	78	4			
HW4SC0478-4	Storage	60	24	78	4			
HW4CC6478-4	Combination	36	24	78	4			
HW4CC8478-4	Combination	48	24	78	4			
HW4CC0478-4	Combination	60	24	78	4			
ADDITIONAL S	HELVES, HE	AVY-D	UTY-14	GAUG	ε			
HW6SCS61	Shelf	36	21		1			
HW6SCS64	Shelf	36	24		1			
HW6SCS84	48	24		1				

DURAT	DUGH™	SAF	ETY-\	/IEW	®
Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves
HW4SVSC6478-4 HW4SVSC8478-4	Storage Storage	36 48	24 24	78 78	4 4

DURA	TOUGH		TIL	TED	
Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves
HW4VSC6478-4 HW4VSC8478-4	Storage Storage	36 48	24 24	78 78	4 4

DURATO	UGH [™] G/	ALV/A	NITE	SER	IES
Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves
HEAVY-DUTY-1	6 GAUGE				
HWG6SC6142-2	Storage	36	21	42	2
HWG6SC6160-3	Storage	36	21	60	3
HWG6SC6178-4	Storage	36	21	78	4
HWG6SC6478-4	Storage	36	24	78	4
HWG6SC8460-3	Storage	48	24	60	3
HWG6SC8478-4	Storage	48	24	78	4
HWG6SC0478-4	Storage	60	24	78	4
HWG6CC6478-4	Combination	36	24	78	4
HWG6CC8478-4	Combination	48	24	78	4
HWG6CC0478-4	Combination	60	24	78	4
ADDITIONAL S	HELVES, HE	AVY-DI	JTY-16	GAUG	E
HWG6SCS61	Shelf	36	21		1
HWG6SCS64	Shelf	36	24		1
HWG6SCS84	Shelf	48	24		1
EXTRA HEAVY	DUTY-14 GA	UGE			
HWG4SC6142-2	Storage	36	21	42	2
HWG4SC6160-3	Storage	36	21	60	3
HWG4SC6178-4	Storage	36	21	78	4
HWG4SC6478-4	Storage	36	24	78	4
HWG4SC8460-3	Storage	48	24	60	3
HWG4SC8478-4	Storage	48	24	78	4
HWG4SC0478-4	Storage	60	24	78	4
HWG4CC6478-4	Combination	36	24	78	4
HWG4CC8478-4	Combination	48	24	78	4
HWG4CC0478-4	Combination	60	24	78	4
ADDITIONAL S	HELVES, HE	AVY-DI	JTY-14	GAUG	E
HWG6SCS61	Shelf	36	21		1
HWG6SCS64	Shelf	36	24		1
HWG6SCS84	Shelf	48	24		1



5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

52

Hallowell-List.com

HEAVY-DUTY ADJUSTABLE LEG WORKBENCHES

1-3/4" WORK SURFACES



Steel Top

Heavy 12 gauge steel with no holes on the work surface withstands hard shop use for years. Will not crack, splinter, gouge, or absorb oil.



Shop Top

Shop Top's layered high density particleboard offers superior screw holding characteristics. The top and bottom layers are seal to resist conventional spills. The non-conductive, splinterproof top is 30 percent harder than maple.



Laminated Hardwood Top Thoroughly seasoned, kiln dried hardwood, face-glued to provide an extremely durable, attractive and long lasting work surface.

Work Top Capacity:

200 lbs/sq ft evenly distributed over the entire surface.



Wire harness includes (a) duplex outlet an on/ off switch with (b) wire managment system and installation into leg knockouts

PRACTICAL, COMPACT AND DURABLE WORKBENCHES

Hallowell Workbenches are constructed of only the finest materials and represent the pinnacle in quality, strength, and stability. Our industrial workbenches are designed to withstand the harshest work environments year-in and year-out. With the flexible selection of standard and cost-effective components, these highly efficient units insure maximum productivity in the workplace.





Caster kit include (a) swivel caster with brakes and (b) mounting plates



Width (in.)	Depth (in.)	Height' (in.)	б Тор	Catalog No.	Color
Workb	enches	(includ	es legs, top and s	stringer)	
48	30	34	Shop Top	HWB4830E-ME	ME
60	30	34	Shop Top	HWB6030E-ME	ME
72	30	34	Shop Top	HWB7230E-ME	ME
72	36	34	Shop Top	HWB7236E-ME	ME
48	30	34	Laminated Hardwood	HWB4830M-ME	ME
60	30	34	Laminated Hardwood	HWB6030M-ME	ME
72	30	34	Laminated Hardwood	HWB7230M-ME	ME
72	36	34	Laminated Hardwood	HWB7236M-ME	ME
48	30	34	12 gauge Steel	HWB4830S-ME	ME
60	30	34	12 gauge Steel	HWB6030S-ME	ME
72	30	34	12 gauge Steel	HWB7230S-ME	ME

*Actual top height is 28-1/4" x 34-1/4" with standard legs



5



FORT KNOK[™] DYEAR WARRANTY

MODULAR UTILITY STORAGE AND WORKBENCH SYSTEM

THE PERFECT WORKSPACE SOLUTION



By combining our adjustable Rivetwell Shelving, Heavy-Duty All-Welded Cabinets, Workbenches and Locker/ Drawer units we created a uniquely functional, yet durable modular system.




The Fort Knox Modular Utility Storage & Workbench System provides everything you need to create your own perfect workspace solution. Fabricated from heavy gauge steel and coated with a unique textured two-tone powder coat finish, the Fort Knox system will stand up to the most demanding users.

Our intelligent design allows each major component to be utilized stand alone or in conjunction with any of the other major components.

PRE-CONFIGURED UNITS

D

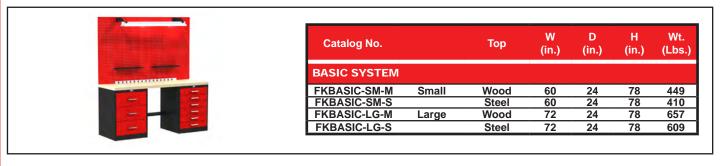



Ø

ъ

Catalog No.		Тор	W (in.)	D (in.)	H (in.)	Wt. (Lbs.)	
OPEN STORAGE SYSTEM							
FKOPENSTOR-SM-M	Small	Wood	132	24	78	711	
FKOPENSTOR-SM-S		Steel	132	24	78	645	
FKOPENSTOR-LG-M	Large	Wood	168	24	78	999	
FKOPENSTOR-LG-S		Steel	168	24	78	909	



Catalog No.		Тор	W (in.)	D (in.)	H (in.)	Wt. (Lbs.)			
SECURE STORAGE SYSTEM									
FKSECURESTOR-SM-M	Small	Wood	132	24	78	1386			
FKSECURESTOR-SM-S		Steel	132	24	78	1347			
FKSECURESTOR-LG-M	Large	Wood	168	24	78	1666			
FKSECURESTOR-LG-S		Steel	168	24	78	1618			



Catalog No.		Тор	W (in.)	D (in.)	Н (in.)	Wt. (Lbs.)	
MIXED STORAGE SYSTEM							
FKMIXEDSTOR-SM-M	Small	Wood	132	24	78	975	
FKMIXEDSTOR-SM-S		Steel	132	24	78	923	
FKMIXEDSTOR-LG-M	Large	Wood	168	24	78	1296	
FKMIXEDSTOR-LG-S		Steel	168	24	78	1227	

		1	
-		-	
	-		

Catalog No.		Тор	W (in.)	D (in.)	H (in.)	Wt. (Lbs.)
COMPLETE SYS	ГЕМ					
FKCOMPLETE-SM-M	Small	Wood	168	24	78	1388
FKCOMPLETE-SM-S		Steel	168	24	78	1336
FKCOMPLETE-LG-M	Large	Wood	210	24	78	1770
FKCOMPLETE-LG-S		Steel	210	24	78	1701

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

62

Hallowell

A WORK AND STORAGE SYSTEM THAT ALLOWS YOU TO CUSTOM DESIGN YOUR OWN WORKPLACE

	Unit Width	Unit Depth	Unit Height	Catalog No.					
Cabinets - Include	Cabinets - Include 4 full width shelves								
	36	24	78	FKSC6478-4BR-HT					
	48	24	78	FKSC8478-4BR-HT					
Cabinet Drawer Kit	S								
2 Drawer	36	24	15	FKSCD36-2RR-HT					
	48	24	15	FKSCD48-2RR-HT					
3 Drawer	36	24	15	FKSCD36-3RR-HT					
	48	24	15	FKSCD48-3RR-HT					
Workbench pedesta	als								
3-Drawer	18	24	32	FKWP8432-3D-BR-HT					
i i	24	24	32	FKWP4432-3D-BR-HT					
6-Drawer	18	24	32	FKWP8432-6D-BR-HT					
	24	24	32	FKWP4432-6D-BR-HT					
Double Door	18	24	32	FKWP8432-1BR-HT					
	24	24	32	FKWP4432-1BR-HT					
Workbench tops									
Shop Top	60	24	1-3/4	FKWT6024E					
	72	24	1-3/4	FKWT7224E					
Laminated	60	24	1-3/4	FKWT6024M					
Hardwood	72	24	1-3/4	FKWT7224M					
Steel	60	24	1-3/4	FKWT6024S					
	72	24	1-3/4	FKWT7224S					
Lower Pedestal She	elf								
	24	8	1	FKWPS24ME-HT					
	30	8	1	FKWPS24ME-HT					
	36	8	1	FKWPS36ME-HT					
Side & Back Rail K	its								
	60	24	4	FKSBRK6024RR-HT					
	72	24	4	FKSBRK7224RR-HT					

	Unit Width	Unit Depth	Unit Height	Catalog No.
Workbench Power	Strips			
	48	3		FKWEP48
	60	3		FKWEP60
	72	3		FKWEP72
Light Kit				
	22	3	6	FKWLK22
Pegboard Kits Ead	ch Kit Inc	ludes (2)	pcs	
	22	3/4	44-1/4	FKWBP22RR-HT
	30	3/4	44-1/4	FKWBP60RR-HT
	36	3/4	44-1/4	FKWBP72RR-HT
Pegboard Shelves				
	20	5	1	FKWS22ME-HT
	28	5	1	FKWS30ME-HT
	34	5	1	FKWBP72RR-HT
Lockers				
Single Door	18	24	78	FKL8478-1BR-HT
Lockers	24	24	78	FKL4478-1BR-HT
3-Drawers	18	24	78	FKL8478-3D-BR-HT
	24	24	78	FKL4478-3D-BR-HT
6-Drawers	18	24	78	FKL8478-6D-BR-HT
	24	24	78	FKL4478-6D-BR-HT
Shelving Units				
With Particle Board	36	24	78	FKR362478-5S-W-BR-HT
Decking	48	24	78	FKR482478-5S-W-BR-HT
With EZ-Deck Steel	36	24	78	FKR362478-5S-E-BR-HT
Decking	48	24	78	FKR482478-5S-E-BR-HT
With Featherdeck	36	24	78	FKR362478-5S-F-BR-HT
Decking	48	24	78	FKR482478-5S-F-BR-HT
Extra Shelf Level				
With Particle Board	36	24	3-1/2	FKRL3624W-RR-HT
Decking	48	24	3-1/2	FKRL4824W-RR-HT
With EZ-Deck Steel	36	24	3-1/2	FKRL3624E-RR-HT
Decking	48	24	3-1/2	FKRL4824E-RR-HT
With Featherdeck	36	24	3-1/2	FKRL3624F-RR-HT
Decking	48	24	3-1/2	FKRL4824F-RR-HT

CUSTOM TEXTURED FINISH



Specially formulated with a unique hammer texture that is tough, highly durable and provides long lasting protection.



Hallowell-List.com


FORT KNOX MODULAR STORAGE SYSTEM COMPONENTS & FEATURES

FORT KNOX SHELVING




Versatile quick assembly Rivetwell shelving provides heavy-duty storage while allowing four sided access by eliminating the need for anti-sway bracing. Four-sided beam design provides maximum decking capacity. Each unit includes 5 shelf levels including top and bottom and is available in choice of 36" and 48" wide units. Order additional levels as needed. The unique color combination of black uprights and red beams provides an attractive appearance and allows perfect integration into your custom configured system. We offer two decking choices. Order particle board or EZ-Deck steel decking for maximum capacity.

FORT KNOX SHELF OPTIONS



FORT KNOX MODULAR SYSTEM



EZ-DECK

PARTICLE BOARD

If additional levels are needed for your setup, shelf levels can be ordered in each of the two available deckings to meet your specific requirements.

FORT KNOX CABINETS



Fabricated of extra heavy-duty 14 gauge steel, reinforced doors and 1,450 lb. capacity adjustable shelves, durability is an understatement. Best-in-class super-duty 13 gauge full height hinge and 3/16" ergonomically engineered cremone turn-handle insure proper door alignment and operation for a lifetime of use. Each cabinet includes 4 full-width shelves.

Doors are secured in the closed position with our high-security 3-point locking system which includes 3/8" diameter round locking rods that are held securely in place by welded-in pry-resistant retainers. These rods engage both the top and bottom of the cabinet door frame when the door is closed which the center latch rotates behind the slave door. Handle includes provisions for a padlock (locks not included).

Shelves are fully adjustable on 3" centers allowing you to maximize the cabinet's interior space. Cabinets are available in 36" and 48" widths and can accommodate our modular cabinet drawer units. With durable textured powder coat finish presented in an attractive two-tone color combining a black body with red door, you can be sure our system will be the highlight of your workspace environment.

FORT KNOX OPTIONAL DRAWER KITS



CHOOSE FROM 2 OR 3 DRAWER INSERTS

Each modular drawer unit is 15" high and is available in a 2-drawer or 3-drawer version. Drawers allow maximum weight bearing capacity by combining heavy 14 gauge construction with super-strength 500 lb. capacity full-extension glides. The full extension allows full use of each drawer.

Drawer units can be easily added to any Fort Knox and DuraTough All-Welded Cabinet allowing you to custom configure your cabinets to your specific needs.

Note: Drawer units should always be installed into the lower portion of the cabinets to insure stability when opening the drawers. Only one drawer should be opened at a time.





FORT KNOX PEDESTAL UNITS





3 DRAWER PEDESTAL



DOUBLE DOOR PEDESTAL

.

Perfect as stand-alone units or as supports for workbenches. These versatile all-welded heavy-duty modules are available in multiple sizes and configurations and provide ample storage for tools.

Double Door Workbench Pedestals are perfect for storage of larger items. Our high security 3-point latching system is pad-lockable (locks not included).

Drawer Workbench Pedestals are engineered for years of smooth operation while the ergonomic handles add style. Full-extension drawer glides allow full use of drawer space. Available in both 6-drawer and 3-drawer models.

FORT KNOX WORKBENCH TOPS



Choose from rugged steel, laminated hardwood and composite core resin board workbench tops. Each is 1-3/4" thick and provides a perfect working surface.

FORT KNOX WORKBENCH ACCESSORIES



- A LIGHT KITS provide a convenient way to illuminate your work surface. Each light kit easily attaches to our steel pegboards allowing you to mount is where light is needed most.
- B STEEL PEGBOARD PANELS are engineered in three convenient sizes to fit perfectly into our Fort Knox System. Out unique design allows panels to be wall mounted or attached to the sides of our Fort Knox lockers and cabinets. Heavy-gauge design is perfect for industrial applications.
- C PEGBOARD SHELVES mount to the pegboard providing shelf space exactly where you need it. Available in three sizes.
- D ELECTRICAL POWER BAR provides additional power when needed. Available to match both 60" and 72" wide workbenches.
- E LOWER PEDESTAL SHELF mounts between two bench pedestals to provide out of the way storage. Available in three lengths to work with most pedestal configurations.
- F SIDE AND BACK RAIL KITS provide edging to your workbench surface to prevent items from sliding and/or rolling off. Perfect when workbenches and being used stand alone.

FORT KNOX LOCKERS/CABINETS



All-welded heavy-duty Fort Knox lockers are available in multiple sizes and configurations allowing maximum versatility. All doors include a stainless steel recessed handle with padlock hasp (locks not included).

FULL DOOR CABINET includes an upper fixed shelf with four adjustable stainless steel shelves.

COMBINATION CABINET include three stainless steel adjustable shelves with choice of 3 or 6 lower drawers. Drawers are interchangeable with our pedestal drawer units.



708

BLACK

IME



Specially formulated with a unique hammer texture that is tough, highly durable and provides long lasting protection.

FORT KNOX MODULAR SYSTEM

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

RELAY RED

(RR)

PREMIUM KD STOCK WARDROBE LOCKERS

PREMIUM ALL-PURPOSE WARDROBE LOCKERS

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge **BODY STYLES:** Single, double and triple tier

DOOR: 16 gauge louvered for added ventilation

HINGES: Continuous piano type

'EAR

HANDLE: Stainless steel recessed handle with multi-point gravity lift-type latching for a modern look and added safety. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT ROD: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.

APPEARANCE: All lockers include matching body colors. Order Finished End Panels for exposed row ends if desired. Finished End Panels install over top of universal side panels adding strength and rigidity at exposed row ends and can be ordered to match locker door/frame color.

GENERAL FEATURES:

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Lockers can be ordered in combination with Premium box lockers.
- All items shown are available for shipment within 5 business days of receipt of order.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Locks are not included.

ANTIMICROBIAL PRATECT

UPGRADED Antimicrobial **Recessed Handle Finger Lift Cover**

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria



Deep drawn stainless steel recessed handle with gravity lift-type latching for doors 20" high and higher





NEW STOCK COLOR 8 6 **Double Tier,** 3 wide,

Black

PREMIUM QUALITY COMPETITIVELY PRICED

Width	Depth	Opening Height		Openings Tier		Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection	
SINGL	E TIEI	R								
12	12	60	66	1	1-wide	1	U1226-1	U1226-1A	PT, HG	
12	12	60	66	1	3-wide	3	U3226-1	U3226-1A	PT, HG	
12	15	60	66	1	1-wide	1	U1256-1	U1256-1A	PT, HG	
12	15	60	66	1	3-wide	3	U3256-1	U3256-1A	PT, HG	
12 12	18 18	60 60	66 66	1 1	1-wide 3-wide	1	U1286-1 U3286-1	U1286-1A U3286-1A	PT, HG PT, HG	
12	12	72	78	1	1-wide	3 1	U1228-1	U1228-1A	PT, HG, MB, ME, PL	
12	12	72	78	1	3-wide	3	U3228-1	U3228-1A	PT, HG, MB, ME, PL	
12	15	72	78	1	1-wide	1	U1258-1	U1258-1A	PT, HG, MB, ME, PL	
12	15	72	78	1	3-wide	3	U3258-1	U3258-1A	PT, HG, MB, ME, PL	
12	18	72	78	1	1-wide	1	U1288-1	U1288-1A	PT, HG, MB, ME, PL	
12	18	72	78	1	3-wide	3	U3288-1	U3288-1A	PT, HG, MB, ME, PL	
15	15	72	78	1	1-wide	1	U1558-1	U1558-1A	PT, HG	
15	15	72	78	1	3-wide	3	U3558-1	U3558-1A	PT, HG	
15	18	72	78	1	1-wide	1	U1588-1	U1588-1A	PT, HG	
15 15	18 21	72 72	78 78	1	3-wide 1-wide	3 1	U3588-1 U1518-1	U3588-1A U1518-1A	PT, HG PT, HG	
15	21	72	78	1	3-wide	3	U3518-1	U3518-1A	PT, HG	
15	24	72	78	1	1-wide	1	U1548-1	U1548-1A	PT, HG	←NE
15	24	72	78	1	3-wide	3	U3548-1	U3548-1A	PT, HG	←NE
18	18	72	78	1	1-wide	1	U1888-1	U1888-1A	PT, HG	
18	18	72	78	1	3-wide	3	U3888-1	U3888-1A	PT, HG	
18	21	72	78	1	1-wide	1	U1818-1	U1818-1A	PT, HG	
18	21	72	78	1	3-wide	3	U3818-1	U3818-1A	PT, HG	
18	24	72	78	1	1-wide	1	U1848-1	U1848-1A	PT, HG	<-NE\
18	24	72	78	1	3-wide	3	U3848-1	U3848-1A	PT, HG	←NEV
	LE TI									
12	12	30	66	2	1-wide	2	U1226-2	U1226-2A	PT, HG	
12 12	12	30 30	66 66	2	3-wide 1-wide	6	U3226-2 U1256-2	U3226-2A U1256-2A	PT, HG PT, HG	
12	15 15	30 30	66	2 2	3-wide	2 6	U3256-2	U3256-2A	PT, HG PT, HG	
12	18	30	66	2	1-wide	2	U1286-2	U1286-2A	PT, HG	
12	18	30	66	2	3-wide	6	U3286-2	U3286-2A	PT, HG	
12	12	36	78	2	1-wide	2	U1228-2	U1228-2A	PT, HG, MB, ME, PL	
12	12	36	78	2	3-wide	6	U3228-2	U3228-2A	PT, HG, MB, ME, PL	
12	15	36	78	2	1-wide	2	U1258-2	U1258-2A	PT, HG, MB, ME, PL	
12	15	36	78	2	3-wide	6	U3258-2	U3258-2A	PT, HG, MB, ME, PL	
12	18	36	78	2	1-wide	2	U1288-2	U1288-2A	PT, HG, MB, ME, PL	
12	18	36	78	2	3-wide	6	U3288-2	U3288-2A	PT, HG, MB, ME, PL	
15	15	36	78	2	1-wide	2	U1558-2	U1558-2A	PT, HG	
15 15	15	36 36	78 78	2	3-wide	6	U3558-2 U1588-2	U3558-2A U1588-2A	PT, HG	
15 15	18 18	36	78	2 2	1-wide 3-wide	2 6	U3588-2	U3588-2A	PT, HG PT, HG	
15	21	36	78	2	1-wide	2	U1518-2	U1518-2A	PT, HG	
15	21	36	78	2	3-wide	6	U3518-2	U3518-2A	PT, HG	
15	24	36	78	2	1-wide	2	U1548-2	U1548-2A	PT, HG	←NE
15	24	36	78	2	3-wide	6	U3548-2	U3548-2A	PT, HG	←NE
18	18	36	78	2	1-wide	2	U1888-2	U1888-2A	PT, HG	←NE
18	18	36	78	2	3-wide	6	U3888-2	U3888-2A	PT, HG	←NEI
18	21	36	78	2	1-wide	2	U1818-2	U1818-2A	PT, HG	←NEV
18	21	36	78	2	3-wide	6	U3818-2	U3818-2A	PT, HG	€NE
18 18	24	36 36	78	2	1-wide	2	U1848-2	U1848-2A	PT, HG	€NE\
	24		78	2	3-wide	6	U3848-2	U3848-2A	PT, HG	←NE
	E-Tier		70	2	1 mida	2	111000.0	11220.24		
12 12	12 12	24	78 79	3	1-wide 3-wide	3	U1228-3 U3228-3	U1228-3A	PT, HG, MB, ME, PL	
12 12	12 15	24 24	78 78	3 3	3-wide 1-wide	9 3	U3228-3 U1258-3	U3228-3A U1258-3A	PT, HG, MB, ME, PL PT, HG, MB, ME, PL	
12	15	24 24	78 78	3	3-wide	3 9	U3258-3	U1258-3A U3258-3A	PT, HG, MB, ME, PL PT, HG, MB, ME, PL	
		24	78	3	1-wide	3	U1288-3	U1288-3A	PT, HG, MB, ME, PL	
12	18	24	10							



67

Hallowell

Hallowell-List.com

GREENG CERTIFIED GOLD



PREMIUM KD STOCK **BOX LOCKERS**

REMIUM KD STOCK BOX LOCKERS			bud bud </th <th></th> <th></th> <th>NEW STOCK COLOR</th> <th>NEW STOCK COLOR</th>			NEW STOCK COLOR	NEW STOCK COLOR
X E	Five Tier, 1 wide, 5 openings Tan	Five Tier, 1 wide, 5 openings Dark Gray	Six Tier, 1 wide, 6 openings Tan	Six Tier, 1 wide, 6 openings Dark Gray	Six Tier, 1 wide, 6 openings Marine Blue	Six Tier, 1 wide, 6 openings Light Gray	Six Tier, 1 wide, 6 openings Black

4-Wide Wall Mount Lockers



Single-point thru-the-door friction catch door pull designed for use with a padlock or built-in lock. Shown with optional strike plate which protects door from being marred by padlock and standard piano hinge.

Sixteen-Person Lockers



Six Tier, 3 wide, 18 openings Light Gray

HALLOWELL PREMIUM BOX LOCKERS INCLUDE LOUVERED DOORS AND ARE PERFECT FOR STORING PERSONAL ITEMS.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Four, five, six tier, 16 Person and wall mount

DOOR: 18 gauge, Louvered for added ventilation

HINGES: Continuous piano type

HANDLE: Single-point projecting friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

HOOKS: None

COAT ROD: None, standard on the 16 person

SHELVES: None

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.

APPEARANCE: All lockers include matching body colors. Order Finished End Panels for exposed row ends if desired. Finished End Panels install over top of universal side panels adding strength and rigidity at exposed row ends and can be ordered to match locker door/frame color.

2 YEAR	PIANO HINGE
WARRANTY	Standard

GENERAL FEATURES:

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Lockers can be ordered in combination with Premium wardrobe lockers
- All items shown are available for shipment within 5 business days of receipt of order.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Locks are not included.





All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

Width	Depth	Opening Height		Openings Tier	Grouping	Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
FIVE	TIER								
12	12	12	66	5	1-wide	5	U1226-5	U1226-5A	PT, HG
12	12	12	66	5	3-wide	15	U3226-5	U3226-5A	PT, HG
12	15	12	66	5	1-wide	5	U1256-5	U1256-5A	PT, HG
12	15	12	66	5	3-wide	15	U3256-5	U3256-5A	PT, HG
12	18	12	66	5	1-wide	5	U1286-5	U1286-5A	PT, HG
12	18	12	66	5	3-wide	15	U3286-5	U3286-5A	PT, HG
SIX TIER									
12	12	12	78	6	1-wide	6	U1228-6	U1228-6A	PT, HG, MB, ME, PL
12	12	12	78	6	3-wide	18	U3228-6	U3228-6A	PT, HG, MB, ME, PL
12	15	12	78	6	1-wide	6	U1258-6	U1258-6A	PT, HG, MB, ME, PL
12	15	12	78	6	3-wide	18	U3258-6	U3258-6A	PT, HG, MB, ME, PL
12	18	12	78	6	1-wide	6	U1288-6	U1288-6A	PT, HG, MB, ME, PL
12	18	12	78	6	3-wide	18	U3288-6	U3288-6A	PT, HG, MB, ME, PL
4-WIDE WALL MOUNT									
48	18 12 14-3/4 4-Wide Wall Mount		t 4	U1482-4WM	U1482-4WM-A	PT, HG			
16-PERSON									
72	18	12	78	16	-Person U	nit 16	U1788-16	U1788-16A	PT, HG








0

70







ARRIVES FULLY-ASSEMBLED READY-TO-USE



FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge **BODY STYLES:** Single, double, triple and six tier

DOOR: 16 gauge, 18 gauge for box doors

HINGES: Continuous piano type

HANDLE (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HANDLE (box): Box lockers include a projecting single-point friction catch door pull. No moving parts insures quiet maintenance-free operation.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for box lockers.

COAT RODS: Available for single tier at a nominal charge

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.

GENERAL FEATURES:

- Available in single, double, triple and six tier models
- All lockers arrive ready-to-use. Lockers ship fully-assembled and include one combination padlock per door for true out-of-the box use.
- Padlock Strike Plates are included for six tier doors.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.



UPGRADED Antimicrobial Recessed Handle Finger Lift Cover & Box Door Finger Pulls

Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.





Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection		
	LE TIER									
12	12	72	78	1	1-wide	1	URB1228-1A	PT, HG, MB, ME, PL		
12	12	72	78	1	3-wide	3	URB3228-1A	PT, HG, MB, ME, PL		
12	15	72	78	1	1-wide	1	URB1258-1A	PT, HG, MB, ME, PL		
12	15	72	78	1	3-wide	3	URB3258-1A	PT, HG, MB, ME, PL		
12	18	72	78	1	1-wide	1	URB1288-1A	PT, HG, MB, ME, PL		
12	18	72	78	1	3-wide	3	URB3288-1A	PT, HG, MB, ME, PL		
DOU	BLE TIEF	2								
12	12	36	78	2	1-wide	2	URB1228-2A	PT, HG, MB, ME, PL		
12	12	36	78	2	3-wide	6	URB3228-2A	PT, HG, MB, ME, PL		
12	15	36	78	2	1-wide	2	URB1258-2A	PT, HG, MB, ME, PL		
12	15	36	78	2	3-wide	6	URB3258-2A	PT, HG, MB, ME, PL		
12	18	36	78	2	1-wide	2	URB1288-2A	PT, HG, MB, ME, PL		
12	18	36	78	2	3-wide	6	URB3288-2A	PT, HG, MB, ME, PL		
TRIP	LE TIER									
12	12	24	78	3	1-wide	3	URB1228-3A	PT, HG, MB, ME, PL		
12	12	24	78	3	3-wide	9	URB3228-3A	PT, HG, MB, ME, PL		
12	15	24	78	3	1-wide	3	URB1258-3A	PT, HG, MB, ME, PL		
12	15	24	78	3	3-wide	9	URB3258-3A	PT, HG, MB, ME, PL		
12	18	24	78	3	1-wide	3	URB1288-3A	PT, HG, MB, ME, PL		
12	18	24	78	3	3-wide	9	URB3288-3A	PT, HG, MB, ME, PL		
SIX 1	SIX TIER									
12	12	12	78	6	1-wide	6	URB1228-6A	PT, HG, MB, ME, PL		
12	12	12	78	6	3-wide	18	URB3228-6A	PT, HG, MB, ME, PL		
12	15	12	78	6	1-wide	6	URB1258-6A	PT, HG, MB, ME, PL		
12	15	12	78	6	3-wide	18	URB3258-6A	PT, HG, MB, ME, PL		
12	18	12	78	6	1-wide	6	URB1288-6A	PT, HG, MB, ME, PL		
12	18	12	78	6	3-wide	18	URB3288-6A	PT, HG, MB, ME, PL		

H PIANO HINGE STANDARD





Keady

6

Ready-Built II Lockers Include:

Assembly Padlocks Padlock Strike Plates Slope Tops 6" High Metal Bases

7 P





NEW

NEW

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double, triple and six tier

DOOR: 16 gauge, 18 gauge for box doors, louvered for added ventilation

HINGES: Continuous piano type

HANDLE (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HANDLE (box): Box lockers include a projecting single-point friction catch door pull. No moving parts insures quiet maintenance-free operation.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for six-tier lockers

COAT RODS: Available for single tier at a nominal charge

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge

GENERAL FEATURES:

- All lockers arrive ready-to-use. Lockers ship fully-assembled and include one combination padlock per door for true out-of-the box use.
- Sloping top reduces dust accumulation and prevents item storage on locker tops.
- Closed metal bases provide a more finished appearance and eliminates the need to clean beneath lockers.
- Padlock Strike Plates are included for six tier doors.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.



YEAR

UPGRADED Antimicrobial Recessed Handle Finger Lift Cover & Box Door Finger Pulls

Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.



READY-BUILT™ II WARDROBE AND BOX LOCKERS

STANDARDembledColor
SelectionIASBPT, HG, MB, ME, PLIASBPT, HG, MB, ME, PL

PIANO HINGE

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
	E TIER							
12	12	72	78	1	1-wide	1	URB1228-1ASB	PT, HG, MB, ME, PL
12	12	72	78	1	3-wide	3	URB3228-1ASB	PT, HG, MB, ME, PL
12	15	72	78	1	1-wide	1	URB1258-1ASB	PT, HG, MB, ME, PL
12	15	72	78	1	3-wide	3	URB3258-1ASB	PT, HG, MB, ME, PL
12	18	72	78	1	1-wide	1	URB1288-1ASB	PT, HG, MB, ME, PL
12	18	72	78	1	3-wide	3	URB3288-1ASB	PT, HG, MB, ME, PL
DOUE	LE TIER							
12	12	36	78	2	1-wide	2	URB1228-2ASB	PT, HG, MB, ME, PL
12	12	36	78	2	3-wide	6	URB3228-2ASB	PT, HG, MB, ME, PL
12	15	36	78	2	1-wide	2	URB1258-2ASB	PT, HG, MB, ME, PL
12	15	36	78	2	3-wide	6	URB3258-2ASB	PT, HG, MB, ME, PL
12	18	36	78	2	1-wide	2	URB1288-2ASB	PT, HG, MB, ME, PL
12	18	36	78	2	3-wide	6	URB3288-2ASB	PT, HG, MB, ME, PL
TRIPL	E TIER							
12	12	24	78	3	1-wide	3	URB1228-3ASB	PT, HG, MB, ME, PL
12	12	24	78	3	3-wide	9	URB3228-3ASB	PT, HG, MB, ME, PL
12	15	24	78	3	1-wide	3	URB1258-3ASB	PT, HG, MB, ME, PL
12	15	24	78	3	3-wide	9	URB3258-3ASB	PT, HG, MB, ME, PL
12	18	24	78	3	1-wide	3	URB1288-3ASB	PT, HG, MB, ME, PL
12	18	24	78	3	3-wide	9	URB3288-3ASB	PT, HG, MB, ME, PL
SIX T	IER							
12	12	12	78	6	1-wide	6	URB1228-6ASB	PT, HG, MB, ME, PL
12	12	12	78	6	3-wide	18	URB3228-6ASB	PT, HG, MB, ME, PL
12	15	12	78	6	1-wide	6	URB1258-6ASB	PT, HG, MB, ME, PL
12	15	12	78	6	3-wide	18	URB3258-6ASB	PT, HG, MB, ME, PL
12	18	12	78	6	1-wide	6	URB1288-6ASB	PT, HG, MB, ME, PL
12	18	12	78	6	3-wide	18	URB3288-6ASB	PT, HG, MB, ME, PL



....

Double Tier,

1 wide, 2 openings

SPECIALLY FORMULATED ANTIMICROBIAL FINISH



B

MEDSAFETM HEALTH CARE LOCKERS

ANTIMICROBIAL HEALTH CARE LOCKERS

Specially formulated powder coat finish protects against bacteria, mold, yeast & mildew for up to 20 years!



FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single and double tier

CUSTOM FEATURES: Antimicrobial finish

DOOR: 16 gauge, louvered for added ventilation,

HINGES: Continuous piano type

HANDLE: Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: All stock lockers are standard with 6" high legs. Lockers without legs are available for a nominal charge.

PROTECTION

UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria



tion



		_			•					
	Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Colo Select
	SINGL	E TIER								
	12	18	72	78	1	1-wide	1	UMS1288-1	UMS1288-1A	PL
	12	18	72	78	1	3-wide	3	UMS3288-1	UMS3288-1A	PL
	15	18	72	78	1	1-wide	1	UMS1588-1	UMS1588-1A	PL
	15	18	72	78	1	3-wide	3	UMS3588-1	UMS3588-1A	PL
	18	18	72	78	1	1-wide	1	UMS1888-1	UMS1888-1A	PL
	18	18	72	78	1	3-wide	3	UMS3888-1	UMS3888-1A	PL
	DOUBI	LE TIER								
	12	18	36	78	2	1-wide	2	UMS1288-2	UMS1288-2A	PL
	12	18	36	78	2	3-wide	6	UMS3288-2	UMS3288-2A	PL
	15	18	36	78	2	1-wide	2	UMS1588-2	UMS1588-2A	PL
	15	18	36	78	2	3-wide	6	UMS3588-2	UMS3588-2A	PL
- 1										

Single Tier, 1 wide, 1 opening



HALLOWELL QUALITY





ValueMax lockers offer exceptional value, quality and finish at an affordable price.

ValueMax lockers are the perfect solution for limited budget projects.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier **DOOR:** 16 gauge, louvered for added ventilation

HINGES: Continuous piano type

HANDLE: Single-point thru-the-door friction catch door pull designed for use with a padlock

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.





UPGRADED Antimicrobial Box Door Finger Pulls

All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

		Opening	Frame			Openings	Knock-Down		Color
Width	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Cat No.	Selection
SING	LE TIER								
12	12	72	78	1	1-wide	1	UH1228-1	UH1228-1A	PT, HG
12	12	72	78	1	3-wide	3	UH3228-1	UH3228-1A	PT, HG
12	15	72	78	1	1-wide	1	UH1258-1	UH1258-1A	PT, HG
12	15	72	78	1	3-wide	3	UH3258-1	UH3258-1A	PT, HG
12	18	72	78	1	1-wide	1	UH1288-1	UH1288-1A	PT, HG
12	18	72	78	1	3-wide	3	UH3288-1	UH3288-1A	PT, HG
DOUE	BLE TIER								
12	12	36	78	2	1-wide	2	UH1228-2	UH1228-2A	PT, HG
12	12	36	78	2	3-wide	6	UH3228-2	UH3228-2A	PT, HG
12	15	36	78	2	1-wide	2	UH1258-2	UH1258-2A	PT, HG
12	15	36	78	2	3-wide	6	UH3258-2	UH3258-2A	PT, HG
12	18	36	78	2	1-wide	2	UH1288-2	UH1288-2A	PT, HG
12	18	36	78	2	3-wide	6	UH3288-2	UH3288-2A	PT, HG
TRIP	LE TIER								
12	12	24	78	3	1-wide	3	UH1228-3	UH1228-3A	PT, HG
12	12	24	78	3	3-wide	9	UH3228-3	UH3228-3A	PT, HG
12	15	24	78	3	1-wide	3	UH1258-3	UH1258-3A	PT, HG
12	15	24	78	3	3-wide	9	UH3258-3	UH3258-3A	PT, HG
12	18	24	78	3	1-wide	3	UH1288-3	UH1288-3A	PT, HG
12	18	24	78	3	3-wide	9	UH3288-3	UH3288-3A	PT, HG









MAINTENANCE-FREE QUIET LOCKERS



Modern flush door design with safety-minded recessed handle and reinforced door make our Maintenance-Free™ Quiet KD stock lockers the smart choice.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge, solid with welded in door stiffener

HINGES: Continuous piano type

HANDLE: Deep drawn stainless steel recessed handle with singlepoint latching. Recessed handle protects finish from being marred by padlock.



1 wide,

EAR

7 6



HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge



Maintenance-Free Quiet Lockers include a 3" wide 18 gauge full height door stiffener spot welded to the

inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door.



Deep-drawn 401 stainless steel recessed handle with single-point latching





Single Tier, 3 wide, 3 openings

Triple Tier, 3 wide, 9 openings

CARE-FREE DESIGN QUIET OPERATION **REINFORCED DOORS**

JARD	Hallowell
FIED D	Hallowell-List.com

GREENE

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection	
	LE TIER	rieigitt	rieigitt		crouping		out no.	out no.	ocicotion	
12	12	72	78	1	1-wide	1	UY1228-1	UY1228-1A	PT, HG	
12	12	72	78	1	3-wide	3	UY3228-1	UY3228-1A	PT, HG	
12	15	72	78	1	1-wide	1	UY1258-1	UY1258-1A	PT, HG	
12	15	72	78	1	3-wide	3	UY3258-1	UY3258-1A	PT, HG	
12	18	72	78	1	1-wide	1	UY1288-1	UY1288-1A	PT, HG	
12	18	72	78	1	3-wide	3	UY3288-1	UY3288-1A	PT, HG	
15	15	72	78	1	1-wide	1	UY1558-1	UY1558-1A	PT, HG	
15	15	72	78	1	3-wide	3	UY3558-1	UY3558-1A	PT, HG	
15	18	72	78	1	1-wide	1	UY1588-1	UY1588-1A	PT, HG	
15	18	72	78	1	3-wide	3	UY3588-1	UY3588-1A	PT, HG	
15	21	72	78	1	1-wide	1	UY1518-1	UY1518-1A	PT, HG	←NEW
15	21	72	78	1	3-wide	3	UY3518-1	UY3518-1A	PT, HG	←NEW
15	24	72	78	1	1-wide	1	UY1548-1	UY1548-1A	PT, HG	←NEW
15	24	72	78	1	3-wide	3	UY3548-1	UY3548-1A	PT, HG	←NEW
18	18	72	78	1	1-wide	1	UY1888-1	UY1888-1A	PT, HG	
18	18	72	78	1	3-wide	3	UY3888-1	UY3888-1A	PT, HG	
18	21	72	78	1	1-wide	1	UY1818-1	UY1818-1A	PT, HG	
18	21	72	78	1	3-wide	3	UY3818-1	UY3818-1A	PT, HG	
18	24	72	78	1	1-wide	1	UY1848-1	UY1848-1A	PT, HG	←NEW
18	24	72	78	1	3-wide	3	UY3848-1	UY3848-1A	PT, HG	←NEW
	BLE TIER									
12	12	36	78	2	1-wide	2	UY1228-2	UY1228-2A	PT, HG	
12	12	36	78	2	3-wide	6	UY3228-2	UY3228-2A	PT, HG	
12	15	36	78	2	1-wide	2	UY1258-2	UY1258-2A	PT, HG	
12	15	36	78	2	3-wide	6	UY3258-2	UY3258-2A	PT, HG	
12	18	36	78	2	1-wide	2	UY1288-2	UY1288-2A	PT, HG	
12	18	36	78	2	3-wide	6	UY3288-2	UY3288-2A	PT, HG	
15	15	36	78 70	2	1-wide	2	UY1558-2	UY1558-2A	PT, HG	
15	15	36	78	2	3-wide	6	UY3558-2	UY3558-2A	PT, HG	
15	18 18	36 36	78 78	2	1-wide	2	UY1588-2	UY1588-2A	PT, HG	
15 15	21	36	78	2 2	3-wide 1-wide	6	UY3588-2	UY3588-2A	PT, HG	
15	21	36	78	2	3-wide	2 6	UY1518-2 UY3518-2	UY1518-2A UY3518-2A	PT, HG PT, HG	←NEW ←NEW
15	24	36	78	2	1-wide	2	UY1548-2	UY1548-2A	PT, HG	€NEW
15	24	36	78	2	3-wide	6	UY3548-2	UY3548-2A	PT, HG	←NEW
18	18	36	78	2	1-wide	2	UY1888-2	UY1888-2A	PT, HG	
18	18	36	78	2	3-wide	6	UY3888-2	UY3888-2A	PT, HG	
18	21	36	78	2	1-wide	2	UY1818-2	UY1818-2A	PT, HG	
18	21	36	78	2	3-wide	6	UY3818-2	UY3818-2A	PT, HG	
18	24	36	78	2	1-wide	2	UY1848-2	UY1848-2A	PT, HG	←NEW
18	24	36	78	2	3-wide	6	UY3848-2	UY3848-2A	PT, HG	<-NEW
									,	
12	12	24	78	3	1-wide	3	UY1228-3	UY1228-3A	PT, HG	
12	12	24	78	3	3-wide	9	UY3228-3	UY3228-3A	PT, HG	
12	15	24	78	3	1-wide	3	UY1258-3	UY1258-3A	PT, HG	
12	15	24	78	3	3-wide	9	UY3258-3	UY3258-3A	PT, HG	
12	18	24	78	3	1-wide	3	UY1288-3	UY1288-3A	PT, HG	
12	18	24	78	3	3-wide	9	UY3288-3	UY3288-3A	PT, HG	
12	10	24	10	5	J-WILLE	J	013200-3	013200-3A	11,110	






77

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

lowe

Hallowell-List.





ELECTRONIC ACCESS LOCKERS

Locks arrive in Day-Use mode for shared use and can be programmed for permanent use by management.

FEATURES:

(Ha

 $\widehat{1}$

3 4

5 6

78 90 **BODY CONSTRUCTION:** Knock-down, 24 gauge **BODY STYLES:** Single, double, triple and six tier **DOOR:** 16 gauge, louvered type, 18 gauge for box doors **LATCHING:** Single-point

HINGES: Continuous piano type

HANDLE: User programmable electronic lock/handle, single-point latching

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for 6 tier

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.





Double Tier, 1 wide, 2 openings

Single Tier, 1 wide, 1 opening

Single Tier, 3 wide, 3 openings

PERFECT FOR BOTH SHARED AND PERMANENT USE



LOCK FEATURES:

- Powered by 1 CR123 batteries which provide in excess of 10,000 uses.
- 1 CR123 battery is included.
- LED's flash to indicate low battery level.
- Locker can be opened when batteries are low or dead by using the Master Key override.
- 8-digit master and sub-master codes for two levels of management security.

DAY-USE MODE:

- User can lock and unlock any available locker door with a user selected 4-digit code.
- Upon returning, user enters the 4-digit code to unlock the door. Code is erased and the locker is available for the next user.

PERMANENT MODE:

- User enters a pre-programmed 4-digit code to unlock and use locker repeatedly.
- Lock does not require a code to re-lock door.



Green indicator ring

		Opening	Frame			Openings		Fully-Assembled	Color	
Width	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Cat No.	Selection	
12	12	72	78	1	1-wide	1	UEL1228-1	UEL1228-1A	PT,PL,ME	STOCK
12	12	72	78	1	3-wide	3	UEL3228-1	UEL3228-1A	PT,PL,ME	
12	12	72	78	1	1-wide	1	UEL1258-1	UEL1258-1A	PT,PL,ME	
12	15	72	78	1	3-wide	3	UEL3258-1	UEL3258-1A	PT,PL,ME	729
12	18	72	78	1	1-wide	1	UEL1288-1	UEL1288-1A	PT,PL,ME	TAN (PT)
12	18	72	78	1	3-wide	3	UEL3288-1	UEL3288-1A	PT,PL,ME	IAN CI IJ
	BLE TIER	12	10		0-WIGE		0223200-1	OLL3200-TA		
		20	70	2	4	0				NEW
12	12 12	36 36	78 78	2	1-wide	2	UEL1228-2	UEL1228-2A	PT,PL,ME	711
12 12	12	36	78 78	2	3-wide	6 2	UEL3228-2	UEL3228-2A	PT,PL,ME	LIGHT GRAY
12	15	30 36	78	2 2	1-wide 3-wide	6	UEL1258-2 UEL3258-2	UEL1258-2A UEL3258-2A	PT,PL,ME PT,PL,ME	(PL)
12	15	36	78	2	3-wide	2	UEL3258-2 UEL1288-2	UEL1288-2A	PT,PL,ME	
12	18	30 36	70 78	2	3-wide	6	UEL 1288-2 UEL 3288-2	UEL3288-2A	PT,PL,ME	NEW
		30	10	2	3-wide	0	UEL3200-2	UEL3200-2A	PI,PL,IVIE	
	E TIER									708 DLACK
12	12	24	78	3	1-wide	3	UEL1228-3	UEL1228-3A	PT,PL,ME	BLACK (Me)
12	12	24	78	3	3-wide	9	UEL3228-3	UEL3228-3A	PT,PL,ME	LMEJ
12	15	24	78	3	1-wide	3	UEL1258-3	UEL1258-3A	PT,PL,ME	
12	15	24	78	3	3-wide	9	UEL3258-3	UEL3258-3A	PT,PL,ME	
12	18	24	78	3	1-wide	3	UEL1288-3	UEL1288-3A	PT,PL,ME	
12	18	24	78	3	3-wide	9	UEL3288-3	UEL3288-3A	PT,PL,ME	
SIX T										
12	12	12	78	6	1-wide	6	UEL1228-6	UEL1228-6A	PT,PL,ME	
12	12	12	78	6	3-wide	18	UEL3228-6	UEL3228-6A	PT,PL,ME	
12	15	12	78	6	1-wide	6	UEL1258-6	UEL1258-6A	PT,PL,ME	I LOCK
12	15	12	78	6	3-wide	18	UEL3258-6	UEL3258-6A	PT,PL,ME	
12	18	12	78	6	1-wide	6	UEL1288-6	UEL1288-6A	PT,PL,ME	
12	18	12	78	6	3-wide	18	UEL3288-6	UEL3288-6A	PT,PL,ME	





WHEN MONITORING LOCKER CONTENTS IS DESIRED



KD WARDROBE LOCKERS



WARDROBE LOCKER FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge steel with two high strength injection molded polycarbonate panels per door for easy content viewing

HINGES: Continuous piano type

HANDLE: Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.

ANTIMICROBIAL PROTECTION

UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria



		Opening	Frame		. .	Openings	Knock-Down	· · · · · · · · · · · · · · · · · · ·	Color
Width	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Cat No.	Selection
	LE TIER								
12	12	72	78	1	1-wide	1	USV1228-1	USV1228-1A	PT,PL
12	12	72	78	1	3-wide	3	USV3228-1	USV3228-1A	PT,PL
12	15	72	78	1	1-wide	1	USV1258-1	USV1258-1A	PT,PL
12	15	72	78	1	3-wide	3	USV3258-1	USV3258-1A	PT,PL
12	18	72	78	1	1-wide	1	USV1288-1	USV1288-1A	PT,PL
12	18	72	78	1	3-wide	3	USV3288-1	USV3288-1A	PT,PL
DOUE	BLE TIER								
12	12	36	78	2	1-wide	2	USV1228-2	USV1228-2A	PT,PL
12	12	36	78	2	3-wide	6	USV3228-2	USV3228-2A	PT,PL
12	15	36	78	2	1-wide	2	USV1258-2	USV1258-2A	PT,PL
12	15	36	78	2	3-wide	6	USV3258-2	USV3258-2A	PT,PL
12	18	36	78	2	1-wide	2	USV1288-2	USV1288-2A	PTPL
12	18	36	78	2	3-wide	6	USV3288-2	USV3288-2A	PT,PL
TRIP	E TIER								
12	12	24	78	3	1-wide	3	USV1228-3	USV1228-3A	PT,PL
12	12	24	78	3	3-wide	9	USV3228-3	USV3228-3A	PT,PL
12	15	24	78	3	1-wide	3	USV1258-3	USV1258-3A	PT,PL
12	15	24	78	3	3-wide	9	USV3258-3	USV3258-3A	PT,PL
12	18	24	78	3	1-wide	3	USV1288-3	USV1288-3A	PT.PL
12	18	24	78	3	3-wide	9	USV3288-3	USV3288-3A	PT,PL











CLEAR DOORS FOR UNOBSTRUCTED VIEWING



Hallowell-List.com



KD BOX LOCKERS



BOX LOCKER FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Four tier, six tier, sixteen person and wall mount

DOOR: High strength injection molded clear polycarbonate doors for unobstructed content viewing

HINGES: Continuous piano type

HANDLE: Single-point projecting friction catch door pull prepared for both padlock or built-in lock

COAT RODS: Standard on Sixteen person

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge

GENERAL FEATURES:

- Aluminum number plates (#1-up) with mounting hardware are included.
- Locks are not included.
- Safety-View plus doors provide an unobstructed view of locker contents
- Can be ordered fully-assembled or knock-down for assembly at destination
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row



ANTIMICROBIAL UPGRADED Antimicrobial Box Door Finger Pulls

All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

Clear Polycarbonate Doors

Opening Frame Openings Knock-Down Fully-Assemi Width Depth Height Height Tier Grouping Per Group Cat No. Cat No. FOUR TIER	bled Color Selection
FOUR TIER	Selection
12 12 18 78 4 1-wide 4 USVP1228-4 USVP1228-1 12 12 18 78 4 3-wide 12 USVP3228-4 USVP328-4 USVP328-4<	
12 12 16 76 4 3-wide 12 0.5VF3226-4 0.5VF326-4 0.5VF32	
12 15 18 78 4 3-wide 12 USVP3258-4 USVP3258-4 USVP3258-4	
12 13 16 76 4 5-wide 12 05VF3236-4 05VF3236-4	
12 18 18 78 4 3-wide 12 USVP3288-4 USVP3288-4 USVP3288-4	
	4A PI,PL
FIVE TIER	
12 12 12 66 5 1-wide 5 USVP1226-5 USVP1226-	
12 12 12 66 5 3-wide 15 USVP3226-5 USVP3226-	
12 15 12 66 5 1-wide 5 USVP1256-5 USVP1256-	
12 15 12 66 5 3-wide 15 USVP3256-5 USVP3256-	
12 18 12 66 5 1-wide 5 USVP1286-5 USVP1286-	· · · ·
12 18 12 66 5 3-wide 15 USVP3286-5 USVP3286-	5A PT,PL
SIX TIER	
12 12 12 78 6 1-wide 6 USVP1228-6 USVP1228-	6A PT,PL
12 12 12 78 6 3-wide 18 USVP3228-6 USVP3228-	6A PT,PL
12 15 12 78 6 1-wide 6 USVP1258-6 USVP1258-	6A PT,PL
12 15 12 78 6 3-wide 18 USVP3258-6 USVP3258-	6A PT,PL
12 18 12 78 6 1-wide 6 USVP1288-6 USVP1288-	6A PT,PL
12 18 12 78 6 3-wide 18 USVP3288-6 USVP3288-	6A PT,PL
4-WIDE WALL MOUNT	
48 18 12 14-3/4 4-Wide Wall Mount 4 USVP1482-4WM USVP1482-	4WMA PT,PL
16-PERSON	
72 18 12 78 16-Person Unit 16 USVP1788-16 USVP1788-	16A PT,PL



Six-tier.









81







Four Tier, 3 wide, 12 openings

DigiTech Safety-View Plus Box Lockers





BOX LOCKER FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Four tier, six tier, sixteen person and wall mount

DOOR: High strength injection molded clear polycarbonate doors for unobstructed content viewing

HINGES: Continuous piano type

HANDLE: Digitech lock serves as door pull when in the open position **HOOKS:** None

COAT RODS: Standard on Sixteen person

SHELVES: None

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge

GENERAL FEATURES:

- Aluminum number plates (#1-up) with mounting hardware are included
- Digitech Locks and 1 CR123 batteries included
- Safety-View plus doors provide an unobstructed view of locker contents
- Can be ordered fully-assembled or knock-down for assembly at destination
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row
- Available for immediate shipping

Digitech Electronic Access Lock



Green indicator ring





Clear Polycarbonate Doors Provide View of Locker Contents



ELECTRONIC ACCESS SEE THRU DOORS





LOCK FEATURES:

- Powered by 1 CR123 batteries which provide in excess of 10,000 uses.
- 1 CR123 batteries are included.
- LED's flash to indicate low battery level.
- Locker can be opened when batteries are low or dead by using the Master Key override.
- 8-digit master and sub-master codes for two levels of management security.

DAY-USE MODE:

- User can lock and unlock any available locker door with a user selected 4-digit code.
- Upon returning, user enters the 4-digit code to unlock the door. Code is erased and the locker is available for the next user.

PERMANENT MODE:

- User enters a pre-programmed 4-digit code to unlock and use locker repeatedly.
- Lock does not require a code to re-lock door.









4-Wide Wall Mount 4 openings

Digitech Electronic Access Lock

		Opening	Frame			Openings	Knock-Down	Fully-Assembled	Color
Width	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Cat No.	Selection
	R TIER								
12	12	18	78	4	1-wide	4	UESVP1228-4	UESVP1228-4A	PT
12	12	18	78	4	3-wide	12	UESVP3228-4	UESVP3228-4A	PT
12	15	18	78	4	1-wide	4	UESVP1258-4	UESVP1258-4A	PT
12	15	18	78	4	3-wide	12	UESVP3258-4	UESVP3258-4A	PT
12	18	18	78	4	1-wide	4	UESVP1288-4	UESVP1288-4A	PT
12	18	18	78	4	3-wide	12	UESVP1288-4	UESVP1288-4A	PT
SIX	TIER								
12	12	12	78	6	1-wide	6	UESVP1228-6	UESVP1228-6A	PT,PL
12	12	12	78	6	3-wide	18	UESVP3228-6	UESVP3228-6A	PT,PL
12	15	12	78	6	1-wide	6	UESVP1258-6	UESVP1258-6A	PT,PL
12	15	12	78	6	3-wide	18	UESVP3258-6	UESVP3258-6A	PT,PL
12	18	12	78	6	1-wide	6	UESVP1288-6	UESVP1288-6A	PT,PL
12	18	12	78	6	3-wide	18	UESVP1288-6	UESVP1288-6A	PT,PL
4-WI	DE WA	LL MOUI	NT						
48	18	12	14-3/4	4-V	Vide Wall Mour	nt 4	UESVP1482-4WM	UESVP1482-4WMA	PT
16-P	ERSON	UNIT							
72	18	12	78	1	6-Person Unit	16	UESVP1788-16	UESVP1788-16A	PT



5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS





HEAVY-DUTY VENTILATED (HDV) KD STOCK LOCKERS

Heavy-Duty Ventilated (HDV) KD Stock Lockers

6



 \mathcal{R}





FEATURES:

BODY CONSTRUCTION: Knock-down, 16 gauge body with 18 gauge back. Sides are diamond perforated for maximum ventilation

BODY STYLES: Single, double and six tier

DOOR: 14 gauge, diamond perforated for maximum ventilation

HINGES: Continuous piano type

HANDLE (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HANDLE (box): Box lockers include a projecting single-point friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.


			Opening		Frame	Openings	Knock-down	Fully-Assembled	Color
Width	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Cat No.	Selection
	GLE T								
12	12	72	78	1	1-wide	1	U1228-1HDV	U1228-1HV-A	PT, HG
12	12	72	78	1	3-wide	3	U3228-1HDV	U3228-1HV-A	PT, HG
12	15	72	78	1	1-wide	1	U1258-1HDV	U1258-1HV-A	PT, HG
12	15	72	78	1	3-wide	3	U3258-1HDV	U3258-1HV-A	PT, HG
12	18	72	78	1	1-wide	1	U1288-1HDV	U1288-1HV-A	PT, HG
12	18	72	78	1	3-wide	3	U3288-1HDV	U3288-1HV-A	PT, HG
15	15	72	78	1	1-wide	1	U1558-1HDV	U1558-1HV-A	PT, HG
15	15	72	78	1	3-wide	3	U3558-1HDV	U3558-1HV-A	PT, HG
15 15	18 18	72 72	78 78	1	1-wide	1 3	U1588-1HDV	U1588-1HV-A	PT, HG
15	21	72	78	1	3-wide	3 1	U3588-1HDV	U3588-1HV-A	PT, HG
15	21	72 72	78 78	1	1-wide 3-wide	3	U1518-1HDV U3518-1HDV	U1518-1HV-A U3518-1HV-A	PT, HG PT, HG
15	18	72	78	1	3-wide	3 1	U1888-1HDV	U1888-1HV-A	PT, HG PT, HG
18	18	72	78	1	3-wide	3	U3888-1HDV	U3888-1HV-A	PT, HG
18	21	72	78	1	1-wide	1	U1818-1HDV	U1818-1HV-A	PT, HG
18	21	72	78	1	3-wide	3	U3818-1HDV	U3818-1HV-A	PT, HG
DOU		IER	10	<u> </u>	0-wide		03010-11101	03010-1110-A	11,110
12	12	36	78	2	1-wide	2	U1228-2HDV	U1228-2HV-A	PT, HG
12	12	36	78	2	3-wide	6	U3228-2HDV	U3228-2HV-A	PT, HG PT, HG
12	12	36	78	2	1-wide	2	U1258-2HDV	U1258-2HV-A	PT, HG
12	15	36	78	2	3-wide	6	U3258-2HDV	U3258-2HV-A	PT, HG
12	18	36	78	2	1-wide	2	U1288-2HDV	U1288-2HV-A	PT, HG
12	18	36	78	2	3-wide	6	U3288-2HDV	U3288-2HV-A	PT, HG
15	15	36	78	2	1-wide	2	U1558-2HDV	U1558-2HV-A	PT, HG
15	15	36	78	2	3-wide	6	U3558-2HDV	U3558-2HV-A	PT, HG
15	18	36	78	2	1-wide	2	U1588-2HDV	U1588-2HV-A	PT, HG
15	18	36	78	2	3-wide	6	U3588-2HDV	U3588-2HV-A	PT, HG
15	21	36	78	2	1-wide	2	U1518-2HDV	U1518-2HV-A	PT, HG
15	21	36	78	2	3-wide	6	U3518-2HDV	U3518-2HV-A	PT, HG
18	18	36	78	2	1-wide	2	U1888-2HDV	U1888-2HV-A	PT, HG
18	18	36	78	2	3-wide	6	U3888-2HDV	U3888-2HV-A	PT, HG
18	21	36	78	2	1-wide	2	U1818-2HDV	U1818-2HV-A	PT, HG
18	21	36	78	2	3-wide	6	U3818-2HDV	U3818-2HV-A	PT, HG
SIX '									
12	12	12	78	6	1-wide	6	U1228-6HDV	U1228-6HV-A	PT, HG
12	12	12	78	6	3-wide	18	U3228-6HDV	U3228-6HV-A	PT, HG
12	15	12	78	6	1-wide	6	U1258-6HDV	U1258-6HV-A	PT, HG
12	15	12	78	6	3-wide	18	U3258-6HDV	U3258-6HV-A	PT, HG
12	18	12	78	6	1-wide	6	U1288-6HDV	U1288-6HV-A	PT, HG
12	18	12	78	6	3-wide	18	U3288-6HDV	U3288-6HV-A	PT, HG
							_		





729 **TAN (PT)**

SIUCK



Width

12

12

12

15

15

15

18

18

18

6 6

6 12

12

12

72

72

72

12

15

18

12

15

18

21

24

Depth

12

15

18

15

18

21

18

21

24

12

15

18

21

24

12

15

18

12

15

18

12

15

18

12

15

18

SLOPE TOP CORNER 12

15

18

CLOSED FRONT BASE

CLOSED SIDE BASE

CONTINUOUS SLOPE TOP

INDIVIDUAL SLOPE TOPS

Height

4

5

6

5

6

7

6

7

8

4

5

6

7

8

4

5

6

4

5

6

4

5

6

4

5

6

12

15

18

6

6

6

6

6

6

6


6

END CLOSURES (FOR CONTINUOUS SLOPE TOP)

END CLOSURES (FOR INDIVIDUAL SLOPE TOPS

SLOPE TOP FILLER (FOR INDIVIDUAL SLOPE TOPS)


INDIVIDUAL SLOPE TOPS




END CLOSURES FOR INDIVIDUAL SLOPE TOPS









CLOSED FRONT AND SIDE BASE







COMPLETE SELECTION OF STOCK

Color Selection

PT, HG, MB, ME, PL

PT, HG, MB, ME, PL PT, HG, MB, ME, PL

PT, HG, MB, ME, PL

PT, HG, MB, ME, PL

PT, HG, MB, ME, PL

PT, HG, MB, ME, PL

PT, HG, MB, ME, PL

PT, HG, MB, ME, PL

PT, HG, MB, ME, PL

PT, HG, MB, ME, PL

PT, HG

PT, HG

PT, HG

PT

PT, HG

PT, HG

PT, HG

PT, HG

PT, HG

PT

PT

PT

KD LOCKER ACCESSORIES

Cat No.

KISTT1212

KISTT1215

KISTT1218

KISTT1515

KISTT1518

KISTT1521

KISTT1818

KISTT1821

KISTT1824

KISE12

KISE15

KISE18

KISE21

KISE24

KSTF0612

KSTF0615

KSTF0618

KSTF1212

KSTF1215

KSTF1218

CST1272

CST1572

CST1872

WCSE12

WCSE15

WCSE18

STC12

STC15

STC18

KCFB12

KCFB15

KCFB18

KCSB12

KCSB15

KCSB18

KCSB21

KCSB24

SLOPE TOP CORNER

END CLOSURES FOR CONTINUOUS SLOPE TOPS


Accessories work with lockers shown on pages 66-73 and 75-85. Not compatible with 16-person or 4 wide wall-mount lockers.




COMPLETE SELECTION OF STOCK KD LOCKER ACCESSORIES


Hallowell-List.com

Width Depth	Height	Cat. No.	Color Selection
Z-BASE FRONT			
72	4	KZBF-N	PT, HG, MB, ME, PL
Z-BASE ENDS			
12	4	KZBE12-N	PT, HG, MB, ME, PL
15	4	KZBE15-N	PT, HG, MB, ME, PL
18	4	KZBE18-N	PT, HG, MB, ME, PL
Z-BASE SPLICE	1		
3		KZBS-N	PT
TOP RECESSED			
72	3	KRT-T	PT, HG, MB, ME, PL
TOP RECESSED		LICE	
3	3	KRT-SC	PT, HG, MB, ME, PL
SIDE RECESS	-		
3	63	KRT60L	PT
3	63	KRT60R	PT
3	75	KRT72L	PT, HG, MB, ME, PL
3	75	KRT72R	PT, HG, MB, ME, PL
COAT RODS			
12		KCR12	Plated
15		KCR15	Plated
18		KCR18	Plated
21		KCR21	Plated
24		KCR24	Plated
7.5 (For Duplex and Two-P		KCR15L	Plated
7.5 (For Duplex and Two-P	*/	KCR15R	Plated
FRONT FILLER			
6	66	KFSF0666	PT
12	66	KFSF1266	PT
6 12	78 78	KFSF0678 KFSF1278	PT, HG, MB, ME, PL
	-	KF3F1270	PT, HG, MB, ME, PL
FILLER SLIP JO		KOCC	DT
	66 78	KG66 KG78	
		KG/0	PT, HG, MB, ME, PL
UNIVERSAL AN		A E 010070	DT
1 2	72	AF010272	PT
FLAT TOP FILL	ERS		
6 12		KFTF0612	PT, HG, MB, ME, PL
6 15 6 18		KFTF0615 KFTF0618	PT, HG, MB, ME, PL PT, HG, MB, ME, PL
12 12		KFTF1212	PT, HG, MB, ME, PL PT, HG, MB, ME, PL
12 12		KFTF1215	PT, HG, MB, ME, PL
12 18		KFTF1218	PT, HG, MB, ME, PL
FLAT TOP COR	NER		
12 12		FTC12	PT, HG, MB, ME, PL
15 15		FTC15	PT, HG, MB, ME, PL
18 18		FTC18	PT, HG, MB, ME, PL
UNIVERSAL EN	ID PANELS	5	
12	60	KMP1260	PT, HG
15	60	KMP1560	PT, HG
18	60	KMP1860	PT, HG
12	72	KMP1272	PT, HG, MB, ME, PL
15	72	KMP1572	PT, HG, MB, ME, PL
18	72	KMP1872	PT, HG, MB, ME, PL
21 24	72 72	KMP2172	PT, HG PT
24	12	KMP2472	FI




COAT RODS W/ HOLDERS







RECESSED TRIM



FRONT FILLER AND SLIPJOINT



FLAT TOP FILLER



FLAT TOP CORNER



FINISHED END PANEL



HYBRID WARDROBE KD STOCK LOCKERS

HALLOWELL® HYBRID LOCKCPS WOOD/METAL

FEATURES:

coats of lacquer

BODY CONSTRUCTION: Knock-down, 24 gauge sheet steel **BODY STYLES:** Single, double and triple tier

DOOR: Furniture grade red oak plywood, finished with 2

HINGES: Continuous piano type

HOOKS: Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT RODS: Standard for single and double tier

SHELVES: Hat shelf in single tier lockers only.

LEGS: 6" high legs are standard. Lockers without legs are available at a nominal charge legs appearance:

COLOR: black frame with red oak door

NOTE: Other optional locking methods also available



Single tier, 1 wide



Includes Key Lock



Triple tier, 1 wide

GENERAL FEATURES:

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Built-in key locks are included.



Double tier,

1 wide





THE PRESTIGE OF FINE WOOD, THE AFFORDABLE PRICE OF METAL KD LOCKERS

Hallowell Hallowell-List.com

Red Oak Doors and Steel Frame & Body All lockers shown with optional closed metal base





Width	Depth	Height	Opening Height	Tier	Frame Grouping	Openings Per Group	Knock-down Cat No.	Fully-Assembled Cat No.	Color Selection
SING	LE TIE	R							
12	18	72	78	1	1-wide	1	UW1288-1MEW	UW1288-1A-MEW	ME/Wood
12	18	72	78	1	3-wide	3	UW3288-1MEW	UW3288-1A-MEW	ME/Wood
15	18	72	78	1	1-wide	1	UW1588-1MEW	UW1588-1A-MEW	ME/Wood
15	18	72	78	1	3-wide	3	UW3588-1MEW	UW3588-1A-MEW	ME/Wood
DOU	BLE TI	ER							
12	18	36	78	2	1-wide	2	UW1288-2MEW	UW1288-2A-MEW	ME/Wood
12	18	36	78	2	3-wide	6	UW3288-2MEW	UW3288-2A-MEW	ME/Wood
15	18	36	78	2	1-wide	2	UW1588-2MEW	UW1588-2A-MEW	ME/Wood
15	18	36	78	2	3-wide	6	UW3588-2MEW	UW3588-2A-MEW	ME/Wood
TRIP	LE TIE	R							
12	18	24	78	3	1-wide	3	UW1288-3MEW	UW1288-3A-MEW	ME/Wood
12	18	24	78	3	3-wide	9	UW3288-3MEW	UW3288-3A-MEW	ME/Wood

Accessori	es		
CLOSE	D FRONT B	BASES	
12	6	KCFB12ME	ME
15	6	KCFB15ME	ME
CLOSE	SIDE BAS	ES	
	18 6	KCSB18ME	ME



OCKER

ACCESSORIES

AGES 86-87



CLUB WARDROBE STOCK WOOD LOCKERS



FEATURES:

BODY CONSTRUCTION: Wood lockers shall be fabricated from ¾" plain sliced red oak plywood throughout including sides, backs and hat shelves.

BODY STYLES: Single, double and triple tier

FINISH: All interior/front faces to be finished with a three coat catalyzed clear cabinet lacquer or equivalent.

DOOR: Furniture grade red oak plywood, finished with 3 coats of lacquer

HINGES: Concealed European-style cabinet hinges

HOOKS: Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT RODS: Standard for single and double tier

SHELVES: Hat shelf is included in single tier lockers. **LEGS:** No legs

APPEARANCE: Natural red oak

NOTE: Other optional locking methods also available





Available optional decorative crown molding and base in red oak finish



Concealed European style cabinet door hinges

Single tier, 1 wide Shown with optional finished end panels



Key locks are standard

Double tier, 1 wide Shown with optional finished end panels, base and crown molding

Triple tier, 1 wide Shown with optional finished end panels







IDEAL FOR COUNTRY CLUBS, HEALTH SPAS AND FITNESS CENTERS

Hallowell Hallowell-List.com





Single tier, 3 wide, 3 openings Shown with optional finished end panels, base and decorative crown molding Double tier, 3 wide, 6 openings Shown with optional finished end panels, base and decorative crown molding

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
SINGL	<u>.E TIE</u>	R						
12	18	72	72	1	1-wide	1	UW1282-1A-W	Red Oak
12	18	72	72	1	3-wide	3	UW3282-1A-W	Red Oak
15	18	72	72	1	1-wide	1	UW1582-1A-W	Red Oak
15	18	72	72	1	3-wide	3	UW3582-1A-W	Red Oak
DOU	BLE T	IER						
12	18	36	72	2	1-wide	2	UW1282-2A-W	Red Oak
12	18	36	72	2	3-wide	6	UW3282-2A-W	Red Oak
15	18	36	72	2	1-wide	2	UW1582-2A-W	Red Oak
15	18	36	72	2	3-wide	6	UW3582-2A-W	Red Oak
TRIP	LE TI	ER						
12	18	24	72	3	1-wide	3	UW1282-3A-W	Red Oak
12	18	24	72	3	3-wide	9	UW3282-3A-W	Red Oak
15	18	24	72	3	1-wide	3	UW1582-3A-W	Red Oak
15	18	24	72	3	3-wide	9	UW3588-3A-W	Red Oak

Accesso	ories			Color
Width	Depth	Height	Catalog No.	Selection
BASE				
12	18	4	WCB128W	Red Oak
36	18	4	WCB328W	Red Oak
15	18	4	WCB158W	Red Oak
45	18	4	WCB358W	Red Oak
FINIS	HED EN	ID BASE		
18	4		WCEB18W	Red Oak
3/4 FII	NISHE	DEND PANEL (required at expose	ed ends)	
18		72	WCEP1872W	Red Oak
FRON	T CROV	VN MOLDING		
12		4	WCM12W	Red Oak
15		4	WCM15W	Red Oak
36		4	WCM36W	Red Oak
45		4	WCM45W	Red Oak
END C	ROWN	MOLDING		
18		4	WCME18W	Red Oak



Triple tier, 3 wide, 9 openings Shown with optional finished end panels, base and decorative crown molding



allowe

Hallowell-List.com

RECRUITER WOOD SPORT STOCK LOCKERS



Get Your Team GAME READY! Introducing our New Recruiter™ Set-Back QUICK-SHIP Design

Recruiter lockers are crafted of furniture grade red oak and finished using two coats of high grade cabinet lacquer. Red oak is naturally moisture and mildew resistant so you can be sure to benefit from your investment for years to come. Recruiter lockers are virtually unaffected by normal locker room conditions and are designed to stand up to daily use by today's athletes!

In addition to our standard stock designs and sizes, our engineers are readily available to assist you in custom designing a locker to meet your specific needs. Be it a fitness center, team locker room, country club or resort health spa, we stand behind our product with a full one year warranty that covers defects in materials and workmanship.



Stock Locker: 24"/30"W x 24"D x 84"H

Starter Unit Shown Includes Two Finished End Panels

GREAT STANDARD FEATURES

- Furniture Grade Red Oak Hardwood with Two **Coats of Formaldehyde-Free Catalyzed Conversion** Varnish for Excellent Moisture Resistance
- Modern Contour Edges with Wood Edge Banding
- Security Box with European Soft Close Hinges
- Three Lock Options Available
- Lower Foot Locker/Seat

- Stainless Steel Coat Rod
- Three Stainless Steel Hooks
- Starter/Adder Unit Configurations
- 24" x 24" x 84" and *30" x 24" x 84"
- Ships Fully-Assembled
- Includes Toe Kick Material
- 2 x 4 Sub-Base By Others

ADDITIONAL QUICK-SHIP ACCESSORIES (ADDITIONAL LEAD-TIME APPLY)

- Logo UV Full Color Print Box Door, RLDOORLOGO
- End Filler 15", RLEF1584
- Corner Filler 15" x 15", RLCF151584

Starter units include (2) finished end panels to be used at row ends Adder units do not include finished end panel Order (1) Starter unit for each straight run of lockers and Adder units to fill out the run



Seat Cushion (Black) SC2424BK SC3024BK



Name Plate Holder NPH-0212S (12" wide) NPH-0218S (18" wide)



Shoulder Pad Rack SPHR14R



Shoulder Pad & Helmet Rack SPHR18R



USB Outlet in Security Box USB-4 USB-4-110



0

These lockers are high quality fine furniture. We take special pride in ensuring that each locker is a true work of art. All are made in our own manufacturing plant and shipped directly to you.

1

1 1800

24" & *30" Wide Models Available From Quick-Ship

6

34

QUICK-SHIP LOCK OPTIONS



G

Standard Padlock Cam Hasp



Built In Combination Lock Master Lock #1655



DigiTech-H1™ Electronic Lock 1 YEAR WARRANT STOCK COLOR



Adder Cat. No. Width Depth Height Starter Cat. No. **Recruiter 2 With Combination Lock Hasp** R2SBS242484BNPLFSGRO-S R2SBS242484BNPLFSGRO-A 24 24 84 **Recruiter 2 With Built In Combination Lock** 24 84 R2SBS242484BNBCFSGRO-S R2SBS242484BNBCFSGRO-A 24 Recruiter 2 With Digitech™ H1 Electronic Lock R2SBS242484BNDTFSGRO-A 24 24 84 R2SBS242484BNDTFSGRO-S **End Filler Panels** 84 **RLEF1584** 15 **Corner Fillers** 84 RLCF242484 24 24 36 36 84 RLCF363684

SEE PAGE 122 FOR CUSTOM OPTIONS FROM PRODUCTION

Hallowell-List.com



Hallowell-List.com

GALVANITE™ RUST RESISTANT STOCK KD LOCKERS

Galvanite[™] Rust Resistant Lockers

Galvanite lockers are fabricated from prime galvannealed (hot-dipped zinc coated, annealed) sheet steel , then finished with an electrostatically applied high grade powder coat finish providing double protection against corrosion.

FEATURES:

BODY CONSTRUCTION: 24 gauge, galvannealed corrosion resistant sheet steel

BODY STYLES: Single, double, triple and six tier

DOOR: 16 gauge, galvannealed corrosion resistant sheet steel louvered for added ventilation, 18 gauge for box doors

HINGES: Continuous piano type

HANDLE (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock. **HANDLE (box):** Box lockers include a projecting single-point friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for six tier lockers.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.





UPGRADED Antimicrobial Recessed Handle Finger Lift Cover & Box Door Finger Pulls

Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.



IDEAL FOR HIGH HUMIDITY AND CORROSION PRONE AREAS

GALVANITE[™] CORROSION RESISTANT SHEET STEEL PREVENTS RUST AND CORROSION

Galvanite[™], is List Industries' trade marked name for lockers and cabinets manufactured with galvannealed sheet steel components and finished with an electrostatically applied high-grade powder coat finish. Galvanneal and powder coat offer exceptional double protection against corrosion, even under the most adverse conditions. Tests indicate that galvanneal increases the estimated life-cycle threefold.

Galvanite™ cold rolled sheet steel

Galvanite™ cold rolled sheet steel with our powder coat finish after a 336 hour salt spray test.

Ideal for use in high humidity areas, outdoor locations, near shower or pool areas and food industry facilities.

Hallowell-List.



Galvanite sheet

WHAT IS GALVANNEAL?

Galvanneal is the result of the combined processes of galvanizing (hot-dipped zinc coating) and annealing (heat treatment). Galvanneal does not flake when formed or stamped. The very fine matte finish acts like a primer that easily adheres to paint.

These characteristics make galvannealed sheet steel ideal for steel lockers in high humidity, corrosion prone areas.



Common cold rolled sheet steel after a 336 hour salt spray test.

Fully-Assembled Knock-down Color Frame Openings Opening Width Depth Height Height Tier Grouping Per Group Cat No. Cat No. Selection SINGLE TIER PT 78 U1228-1G U1228-1GA 12 12 72 1-wide 1 12 12 72 78 3-wide 3 U3228-1G U3228-1GA PT 12 15 72 78 1-wide U1258-1G PT U1258-1GA 1 12 15 72 78 3-wide 3 U3258-1G U3258-1GA PT 12 18 72 78 U1288-1G U1288-1GA PT 1-wide 1 1 12 U3288-1G PT 18 72 78 1 3-wide 3 U3288-1GA DOUBLE TIER PT 12 12 36 78 2 1-wide 2 U1228-2G U1228-2GA 12 2 PT 12 36 78 3-wide 6 U3228-2G U3228-2GA 12 15 36 78 2 1-wide 2 U1258-2G U1258-2GA PT 12 15 36 78 2 6 U3258-2G U3258-2GA PT 3-wide 12 18 36 78 2 U1288-2G U1288-2GA PT 1-wide 2 12 18 36 78 2 3-wide 6 U3288-2G U3288-2GA PT TRIPLE TIER 12 24 78 U1228-3G U1228-3GA PT 12 3 1-wide 3 12 12 24 78 3 3-wide 9 U3228-3G U3228-3GA PT 12 24 PT 15 78 1-wide U1258-3G 3 U1258-3GA 3 12 15 24 78 3 9 U3258-3G U3258-3GA PT 3-wide 12 18 24 PT 78 3 1-wide 3 U1288-3G U1288-3GA 12 24 3 PT 18 78 3-wide 9 U3288-3G U3288-3GA SIX TIER 12 12 78 1-wide U1228-6G U1228-6GA PT 12 6 6 12 12 12 78 U3228-6G U3228-6GA PT 6 3-wide 18 12 U1258-6G PT 15 12 78 6 1-wide 6 U1258-6GA 12 15 12 78 18 U3258-6G PT 6 3-wide U3258-6GA 12 18 12 78 U1288-6G PT 6 1-wide 6 U1288-6GA 12 78 PT 18 12 6 3-wide 18 U3288-6G U3288-6GA

Triple Tier, 1 wide, 3 openings







PROVIDES MAXIMUM CORROSION RESISTANCE





Box Locker Doors: Single-point thru-the-door projecting friction catch door pull with padlock hasp



Aquamax Solid Plastic Lockers are Ideal for applications where high humidity, moisture and water are present. Plastic lockers are fabricated from solid high density polyethylene panels (HDPE) for maximum strength and durability while providing corrosion resistance to most common chemicals.

FEATURES:

BODY CONSTRUCTION: Corrosion Proof High Density Polyethylene (HDPE), with 3/8" thick body panels

BODY STYLES: Single, double, triple, six tier and z-tier

HINGES: heavy-duty continuous full height extruded aluminum with a powder-coat finish to match color of door

HANDLE (Wardrobe): Projecting solid plastic handle with lift-type latching

HANDLE (Box): Single-point thru-the-door padlock hasp with projecting door pull

SHELVES: Hat shelf is included in single tier lockers

HOOKS: 2 single-prong hooks in single and double tier lockers

ADVANTAGES:

- Scratch Resistant
- Corrosion Resistant
- Mildew and odor resistant
- Graffiti resistant
- Impact and dent resistant
- Easy to clean
- Chemical Resistant



Width	Depth	Opening Height	Overall Height	Tier	Frame Grouping	Openings Per Group	Taupe Cat No.	Blue/Taupe Cat No.	x *
SIN	GLE TI	IER							TAUP
12	18	72	72	1	1-wide	1	HPL1282-1A-TE	HPL1282-1A-TB	IAUP
12	18	72	72	1	3-wide	3	HPL3282-1A-TE	HPL1382-1A-TB	TAUF
DOL	JBLE T	IER							INUI
12	18	36	72	2	1-wide	2	HPL1282-2A-TE	HPL1282-2A-TB	DI
12	18	36	72	2	3-wide	6	HPL3282-2A-TE	HPL3282-2A-TB	BLUE
TRI	PLE TI	ER							TAUP
12	18	24	72	3	1-wide	3	HPL1282-3A-TE	HPL1282-3A-TB	
12	18	24	72	3	3-wide	9	HPL3282-3A-TE	HPL3282-3A-TB	
SIX	TIER								
12	18	12	72	6	1-wide	6	HPL1282-6A-TE	HPL1282-6A-TB	
12	18	12	72	6	3-wide	18	HPL3282-6A-TE	HPL3282-6A-TB	
Z-S1	TYLE								
12	18	48	72	Z	1-wide	2	HPL1282-ZA-TE	HPL1282-ZA-TB	
12	18	48	72	Ζ	3-wide	6	HPL3282-ZA-TE	HPL3282-ZA-TB	

ANTIMICROBIAL & CORROSION RESISTANT PLASTIC LOCKERS



MedSafe AquaMax lockers are manufactured with high density polyethylene (HDPE) that contains a specially formulated ANTIMICROBIAL agent that permanently resists the growth of bacteria, mold, yeast and mildew. This special feature combined with all the great features of our AquaMax lockers make these lockers ideal for use in medical, educational, retail and manufacturing environments.



3 wide, 3 openings

Width	Depth	Opening Height	Overall Height	Tier	Frame Grouping	Openings Per Group	Cat No.
SINC	GLE TI	ER					
12	18	72	72	1	1-wide	1	MSPL1282-1A-WE
12	18	72	72	1	3-wide	3	MSPL3282-1A-WE
DOU	BLE T	IER					
12	18	36	72	2	1-wide	2	MSPL1282-2A-WE
12	18	36	72	2	3-wide	6	MSPL3282-2A-WE
Z-ST	YLE						
12	18	48	72	Ζ	1-wide	2	MSPL1282-ZA-WE
12	18	48	72	Ζ	3-wide	6	MSPL3282-ZA-WE



FEATURES:

BODY CONSTRUCTION: Corrosion Proof High Density Polyethylene (HDPE), with 3/8" thick body panels

BODY STYLES: Single, double, triple, six tier and z-tier

HINGES: heavy-duty continuous full height extruded aluminum with a powder-coat finish to match color of door

HANDLE (Wardrobe): Projecting solid plastic handle with lift-type latching **HANDLE (Box):** Single-point thru-the-door projecting friction catch door pull with padlock hasp

SHELVES: Hat shelf is included in single tier lockers

HOOKS: 2 single-prong hooks in single and double tier lockers

ADVANTAGES:

- Permanent antimicrobial protection kills microbes (yeast, bacteria, mold, mildew)
- Scratch Resistant
- Corrosion Resistant
- Impact and dent resistant
- Easy to clean
- Mildew and odor resistant
- Graffiti resistant

(pencil, pen, paint and most common markers)

• Chemical Resistant



2-Tier, 3 wide, 6 openings



EAR

RRANTY

O HINGE

3 wide, 6 openings



HANDLES





THE MOST DURABLE LOCKERS AVAILABLE



VersaMax Phenolic Lockers are the most durable lockers available. The unique non-porous surface of phenolic material eliminates the ability for mold, mildew and bacteria to grow making these lockers ideal for wet or damp areas. In addition to this primary benefit, the surface of VersaMax Phenolic Lockers are also water proof and graffiti and scratch resistant.





FEATURES:

BODY CONSTRUCTION: Phenolic construction, Sides and backs are 5/16" thick. Tops, bottoms and shelves are 3/8" thick.

BODY STYLES: Single tier, double tier, six tier and z-tier

DOORS: 1/2" thick solid phenolic with perimeter ventilation

HINGES: 5-knuckle "hospital" type 14 gauge 304 stainless steel, black powder coat finish, exposed, doors open 180°

HANDLE (Padlock Ready): 11 gauge finger-pull 304 stainless steel hasp, prepared for padlock

HANDLE (Electronic Lock): Built-in Digitech H1 Lock serves as handle

HANDLE (Key Cam Lock): Built-in key cam lock serves as handle

SHELVES: Hat shelf is included in single tier lockers

HOOKS: 2 single-prong hooks in single and double tier lockers

COLOR: Figured Annigre

WARRANTY: 20 years

ADVANTAGES:

- · Phenolic's unique non-porous surface eliminates the ability for mold, bacteria and mildew to grow making it ideal for wet areas.
- Corrosion Resistant
- Impact and dent resistant
- Easy to clean
- Fungus and odor resistant
- Graffiti resistant (pencil, pen, paint and most common markers)

AVAILABLE FROM STOCK WITH 3 DIFFERENT LOCK CHOICES:



Padlock Hasp





Built-In Key Cam Locks



(Padlocks With DigiTech™ With Key Opening Overall Frame Openings sold separately) **Electronic Access Locks** Cam Lock Width Depth Height Height Grouping Per Group Cat No. Cat No. Cat No. Tier SINGLE TIER 7284-58 FIGURED ANNIGRE 12 72 18 72 1 1-wide 1 PHL1282-1A-FA PHL1282-1A-E-FA PHL1282-1A-K-FA PHL3282-1A-FA PHL3282-1A-K-FA 12 18 72 72 3-wide 3 PHL3282-1A-E-FA 1 DO BLE TIER 12 18 36 72 2 1-wide 2 PHL1282-2A-FA PHL1282-2A-E-FA PHL1282-2A-K-FA 12 18 36 72 2 3-wide 6 PHL3282-2A-FA PHL3282-2A-E-FA PHL3282-2A-K-FA SIX TIER 12 18 12 72 6 1-wide 6 PHL1282-6A-FA PHL1282-6A-E-FA PHL1282-6A-K-FA PHL3282-6A-K-FA 12 18 12 72 6 3-wide 18 PHI 3282-6A-FA PHL3282-6A-E-FA **Z-STYLE** 12 18 42 72 Ζ 1-wide 2 PHL1282-ZA-FA PHL1282-ZA-E-FA PHL1282-ZA-K-FA 12 18 42 72 Ζ 3-wide 6 PHL3282-ZA-FA PHL3282-ZA-E-FA PHL3282-ZA-K-FA

ATTRACTIVE DURABLE **CORROSION RESISTANT**

204 STAIN 1235 5

Double-Tier,

3 wide.


6 openings

-

Single-Tier,

1 wide.

1 opening



Hallowell-List.

FEATURES:

BODY CONSTRUCTION: knock-down 24 gauge

BODY STYLES: Single, double, and six tier

DOORS: Louvered. 16 gauge for single and double tier lockers. 18 gauge for 6-tier box lockers

LATCHING: Single and double tier use gravity-lift and six-tier uses single-point, through the door finger pull

HINGES: 2-1/2" 5-knuckle hinges. 3 hinges for single tier and 2 hinges for double & six tier

HANDLE: Single and double tier lockers have a deep drawn stainless steel recessed handle with multi-point gravity lifttype latching. Six tier lockers have a finger pull handle

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers

HOOKS: One double prong ceiling hook and three single hooks per single and double tier opening. No hooks for six tier

COLOR: Stainless steel

WARRANTY: 2 years

Six-Tier,

1 wide.

6 openings

YEAR WARRANTY

Width	Depth	Opening Height	Overall Height	Tier	Frame Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.
	-							
12	18	72	78	1	1-wide	1	USS1288-1	USS1288-1A
12	18	72	78	1	3-wide	3	USS3288-1	USS3288-1A
18	18	72	78	1	1-wide	1	USS1888-1	USS1888-1A
18	18	72	78	1	3-wide	3	USS3888-1	USS3888-1A
DOU	IBLE T	TIER						
12	18	36	78	2	1-wide	2	USS1288-2	USS1288-2A
12	18	36	78	2	3-wide	6	USS3288-2	USS3288-2A
18	18	36	78	2	1-wide	2	USS1888-2	USS1888-2A
18	18	36	78	2	3-wide	6	USS3888-2	USS3888-2A
SIX	TIER							
12	18	12	78	6	1-wide	6	USS1288-6	USS1288-6A
12	18	12	78	6	3-wide	18	USS3288-6	USS3288-6A
18	18	12	78	6	1-wide	6	USS1888-6	USS1888-6A
18	18	12	78	6	3-wide	18	USS3888-6	USS3888-6A

	Width	Depth	Height	Cat No.	
ACCESSORIES] [
Individual Slope Top	12	12 18 6 KISTT1218SS	KISTT1218SS	1	
	12	18	6	KISTT1818SS	
Slope Top End Closure	-	18	6	KISE18SS	I
Closed Front Base	12	-	6	KCFB12SS	
	18	-	6	KCFB18SS	
Closed Side Base	-	18	6	KCSB18SS	
Coat Rod Assembly	12	-	-	KCR12SS	
	18	-	-	KCR18SS	IL



UPGRADED Antimicrobial **Recessed Handle Finger Lift Cover** & Box Door Finger Pulls

Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.



304 STAINLESS STEEL LOCKERS

12 78 3-wide 18 USS3888-6 6







GREAT for: ✓ Kid's Bedrooms ✓ Garages

Playroom lockersMudroom lockers



FEATURES:

BODY CONSTRUCTION: knock-down (KD) 24 gauge solid body components, 20 gauge top

BODY STYLES: Teen, Kid

FRAME: 16 gauge frame

SHELVES: Teen Locker has 1 fixed hat shelf, Kid locker has no shelves

HOOKS: Teen locker shall include one double hook and two single hooks attached to hat shelf. No hooks for Kid Locker

HINGES: 16 gauge continuous piano hinge

DOORS: 16 gauge louvered doors

LATCHING: Gravity lift type latching **HANDLE:** Recessed stainless steel


COLOR: 7 bright kid-friendly colors



	TIMICROBIAL	I
Т	PROTECTION	ļ

UPGRADED Antimicrobial Recessed Handle Finger Lift Cover All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Color Selection
KID L	OCKE	२						
15	15	24	24	1	1-wide	1	HKL1515(24)-1	BG, GS, HP, PR, RR, SA, TY
TEEN	I LOCK	ER						
15	15	48	48	1	1-wide	1	HKL151548-1	BG, GS, HP, PR, RR, SA, TY



100

SHOW YOUR TEAM SPIRIT





Hallowell-List

5 color combinations & 3 New solid colors

Home Team Lockers are 48 inch high wardrobe lockers with fixed upper hat shelf and hooks. All lockers are standard with diamond perforated doors and without legs





FEATURES:

BODY CONSTRUCTION: knock-down (KD) 24 gauge body 20 gauge top

FRAME: 16 gauge frame

SHELVES: 1 fixed hat shelf

HOOKS: Home Team locker includes one double hook and two single hooks

HINGES: 16 gauge continuous piano hinge DOORS: 16 gauge louvered doors LATCHING: Gravity lift type latching HANDLE: Recessed stainless steel



ANTIMICROBIAL UPGRADED Antimicrobial Recessed Handle Finger Lift Cover All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria



STOCK COLOR SELECTION

JH MT GR RS		
	JP GS BG RR	
	DARK BLUE 717 GRAND SLAM 739 BUBBLE GUM 721 RELAY RED Body/Frame 717 GRAND SLAM 739 BUBBLE GUM 721 RELAY RED	
ORANGE Door YELLOW Door RED Door WHITE Door I	LIGHT GRAY Door	





CONVENIENT **MODULAR STORAGE**



Stack Cubix lockers and easily attach adjacent units with pre-punched holes on top, sides and bottom. Or use the keyhole punched back for wall mounting.



BODY CONSTRUCTION: Knock-down, 16 gauge HINGES: 16 gauge continuous piano hinge DOORS: 18 gauge Solid (non-vented), Diamond

HANDLE/LOCKS: Finger pull latch prepared for padlock (sold separately), or Built-in key lock **COLOR:** Marine Blue, Black, Light Gray

Overall

Width

PREPARED FOR PADLOCK (not included)

11-5/16

11-5/16

11-5/16

WITH BUILT-IN KEY LOCK (included)

11-5/16

11-5/16

11-5/16

Perforated, or Safety-View (clear)

ANTIMICROBIAL



Ventilated Diamond Perforated Door Padlock Hasp Light Gray



Safety-View[™] Door Key Lock Marine Blue



Plain Locker Door Key Lock Black



Wall Mounting



Desk Mounting



Closet Mounting



FEATURES:

WARRANTY: 2 years

Description

Ventilated Door

Ventilated Door

Safety-View Plus Door

Safety-View Plus Door

Solid Door

Solid Door

tion



Overall

Height

12-11/16

12-11/16

12-11/16

12-11/16

12-11/16

12-11/16



UPGRADED Antimicrobial Box Door Finger Pulls

Overall

Depth

12

12

12

12

12

12

All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

Catalog No.

HC121212-1DP

HC121212-1SVP

HC121212-1DP-K

HC121212-1PL-K

HC121212-1SVP-K

HC121212-1PL





PIANO HINGE STANDARD



Above or Below a Workbench

Color

Selec-

MB, ME, PL

CELL PHONE / TABLET LOCKERS

Hallowell-List.com



Ideal for use in government buildings, schools, health clubs or any location where personal items, cell phones and tablets need to be securely stored.

FEATURES:

BODY CONSTRUCTION: 20 gauge cold rolled steel

HINGES: 16 gauge continuous piano hinge

DOORS: 20 gauge solid (non-vented)

HANDLE/LOCKS: Locks serve as door handle/pull

PADLOCK: hasp cam lock for padlocks by others

KEY LOCK: Cylinder cam locks control keyed to one system

DIGITECH LOCK: Electronic access lock in temporary-use mode that can be programmed for permanent use

COLOR: Light Gray

WARRANTY: 2 year

-





CERTIFIED

EASILY STORE AND PROTECT PERSONAL BELONGINGS.

-

1

5.2

Shown With Digitech Electronic Access Lock

CHOOSE FROM 3 DIFFERENT LOCK OPTIONS.



PREPARED FOR PADLOCK



DIGITECH ELECTRONIC ACCESS LOCK



KEY CAM LOCK





BACKPACK / LAPTOP LOCKERS

- Electronic access door keeps items secure
 - One shelf per opening
 - Prepared for after market wiring to allow charging

WIRE CHASE

Side ventilation allows maximum airflow for cooling while maintaining security





BACKPACK / LAPTOP LOCKERS

Built-in Hallowell Electronic Access Digitech lock also acts as locker handle











ELECTRICAL KNOCK-OUT

********





POWERED Each locker has built-in channel for concealed after-market wiring to convert lockers to charging stations.

VENTILATED Diamond perforations in locker sides promote continuous air flow to cool chargers and components while keeping your items secure.



EASILY CONVERTS TO CHARGING LOCKERS



LED INDICATORS

ROTATE TO OPEN

OVERRIDE KEY



LOCK FEATURES:

- Powered by 1 CR123 battery which provide in excess of 10,000 uses.
- 1 CR123 battery is included.
- LED's flash to indicate low battery level.
- Locker can be opened when batteries are low or dead by using the Master Key override.
- 8-digit master and sub-master codes for two levels of management security.

DAY-USE MODE:

- User can lock and unlock any available locker door with a user selected 4-digit code.
- Upon returning, user enters the 4-digit code to unlock the door. Code is erased and the locker is available for the next user.

PERMANENT MODE:

- User enters a pre-programmed 4-digit code to unlock and use locker repeatedly.
- Lock does not require a code to re-lock door.

FEATURES:

BODY CONSTRUCTION: 16 gauge sheet steel with sides diamond perforated

BODY STYLES: 3-tier, 4-tier

FRAME: 16 gauge welded frame

DOORS: 14 gauge solid sheet steel

HINGES: 16 gauge continuous piano hinge

HANDLE: Hallowell DigiTech[™] electronic, code access lock serves as handle

Digitech Electronic Access

Lock

SHELVES: 1 fixed hat shelf

HOOKS: none

COLOR: 711 Light Gray

WARRANTY: 2 years

SPECIAL FEATURES:

Hallowell

1

3) (4

5

9

Green indicator ring

(2

6

7 (8

(0)

- Each locker has built-in channel for concealing after-market wiring to convert lockers to charging stations.
- Channel shall include knock-outs for electrical outlet in each opening.

Width		Height	Grouping	Openings Per Group	Unassembled Cat No.	Assembled Cat No.	Color Selection
TRIP	LE TIE	R					
15	18	78	1-wide	3	UELBP1588-3	UELBP1588-3A-PL	PL
45	18	78	3-wide	9	UELBP3588-3	UELBP3588-3A-PL	PL
15	21	78	1-wide	3	UELBP1518-3	UELBP1518-3A-PL	PL
45	21	78	3-wide	9	UELBP3518-3	UELBP3518-3A-PL	PL
18	18	78	1-wide	3	UELBP1888-3	UELBP1888-3A-PL	PL
54	18	78	3-wide	9	UELBP3888-3	UELBP3888-3A-PL	PL
18	21	78	1-wide	3	UELBP1818-3	UELBP1818-3A-PL	PL
54	21	78	3-wide	9	UELBP3818-3	UELBP3818-3A-PL	PL
FOUF	R TIER						
15	18	78	1-wide	4	UELBP1588-4PL	UELBP1588-4A-PL	PL
45	18	78	3-wide	12	UELBP3588-4PL	UELBP3588-4A-PL	PL
15	21	78	1-wide	4	UELBP1518-4PL	UELBP1518-4A-PL	PL
45	21	78	3-wide	12	UELBP3518-4PL	UELBP3518-4A-PL	PL
18	18	78	1-wide	4	UELBP1888-4PL	UELBP1888-4A-PL	PL
54	18	78	3-wide	12	UELBP3888-4PL	UELBP3888-4A-PL	PL
18	21	78	1-wide	4	UELBP1818-4PL	UELBP1818-4A-PL	PL
54	21	78	3-wide	12	UELBP3818-4PL	UELBP3818-4A-PL	PL







TURNOUT GEAR FIREFIGHTER LOCKERS

Turnout Gear/Firefighter Lockers



FEATURES:

BODY CONSTRUCTION: 13 gauge 1/2" flattened expanded metal
FRAME: 16 gauge Hollow "T" tubular frame
DOOR (Security Box): 14 gauge cold rolled sheet-steel
HINGES (Security Box): Two heavy-duty 13 gauge 7-knuckle 3-1/2"
HANDLE (Security Box): Projecting combination spring-bolt/padlock hasp door pull
SHELVES: One Galvanneal hat/intermediate shelf and 1 fixed hat shelf.
HOOKS: Two single prong hooks at back and two hooks at coat rod ends.
WARRANTY: Lifetime

Choose from 4 Models



EXPANDED METAL SIDES FOR MAXIMUM VENTILATION

FULLY-FRAMED ALL-WELDED LIFE TIME WARRANTY ANTIMICROBIAL PROTECTION UPGRADED Antimicrobial Box Door Finger Pulls



All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.



Base Model Without Base

(1):



Base Model With Base






With Upper Security Box With Base

Fully-framed, all welded, rugged construction.
Maximum ventilation with expanded metal sides.
Upper shelf provides storage for helmets and head gear.
Without base models include ventilated bottom.
Open-front provides quick access to gear and clothing.

721 Relay Red hammertone textured powder coat finish.





OPTIONAL SECURITY BOX USES TWO HEAVY-DUTY 13 GAUGE 7-KNUCKLE 3-1/2" HINGES AND A FINGER PULL PADLOCK HASP



FIXED HAT SHELF AND STAINLESS STEEL COAT-ROD WITH 2 SINGLE PRONG HOOKS



MODELS WITHOUT BASE HAVE VENTILATED BOTTOM PLATE AND ARE DESIGNED TO BE INSTALLED ON THE WALL WITH THE WALL MOUNTING ANGLE



MODELS WITH BASE ARE DESIGNED TO BE INSTALLED ON THE FLOOR

Description	Width	Depth	Height	Assembled Cat No.	Color Selection
BASE MODE	L				
Without Base	24-3/4	22	84	TGNN42(84)-1C-G	RR-HT
With Base	24-3/4	22	86-1/4	TGNN42(84)-1BC-G	RR-HT
	SECURITY	/ BOX			
Without Base	24-3/4	22	84	TGBN42(84)-1C-G	RR-HT
With Base	24-3/4	22	86-1/4	TGBN42(84)-1BC-G	RR-HT
WALL MOUN	TING ANGL	E FOR MOD	DELS WITHO	UT BASE	
	72	3	3	TGWMA030372	RR-HT



Hallowell-List

12

107

6

Five distinct models to choose, Specifically designed for the uniform use industry.



The Industry Standard in the Uniform Distribution System.





9 Person Uniform Exchange Locker Model HUE454-9P







8 Person Uniform Exchange Locker Model HUE214-8P





UNIFORM DISTRIBUTION SYSTEM





5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

109



ALL-WELDED LOCKERS

ALL-WELDED HEAVY-DUTY CORROSION RESISTANT

Y-FRAMED.

Hallowell All-Welded MaxView lockers are perfect for tool, equipment and gear storage.

FEATURES:

BODY CONSTRUCTION: All-welded 16 gauge heavy-duty tubular frame construction from galvannealed sheet steel, sides and back are 1/2" 13 gauge flattened expanded metal. Top and bottom are heavy-duty galvannealed corrosion resistant sheet steel, fully-assembled

BODY STYLES: Single tier

DOOR: 14 gauge door is diamond perforated for maximum visibility and ventilation. Includes a welded-in full height door stiffener **HINGES:** Heavy-duty 13 gauge 7-knuckle (3 hinges per door)

HANDLE: Single-point projecting friction catch door pull prepared for both padlock or built-in lock.

SHELVES: Four 16 gauge sheet steel welded-in fixed shelves are fabricated from galvanneal corrosion resistant sheet steel add additional rigidity to the unit.




- All-welded heavy-duty construction
- 4 sided viewing of locker contents
 - 4 sided ventilation
 - **Corrosion resistant**
 - Lifetime warranty
 - Full height 3-1/2" wide door stiffener




UPGRADED Antimicrobial Finger Pulls

Door finger pull is made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.



Heavy gauge tubular frame. Bottom shelf of locker sits a full 2-3/4" above finished floor protecting locker contents from water damage.



MAXVIEWTM CORROSION RESISTANT LOCKERS



THE INDUSTRY'S TOUGHEST LOCKER



FULLY-FRAMED ALL-WELDED

Welded Single-Point Ventilated Lockers

FEATURES:

BODY CONSTRUCTION: All-welded, fully-assembled

BODY STYLES: Single and double tier custom

FEATURES: 16 gauge continuous top for added rigidity, 11 gauge MIG welded latch, continuous door strike at hinge and latch side

DOOR: 14 gauge door is diamond perforated for added visibility and ventilation and includes a welded-in full height door stiffener



HINGES: Continuous piano type HANDLE: Deep-drawn seamless stainless steel


recessed handle with single-point thru-the-handle maintenance-free quiet latching system

SHELVES: Hat shelf for single tier

Single-point maintenance-free quiet latching system with recessed handle




3 wide, 6 openings

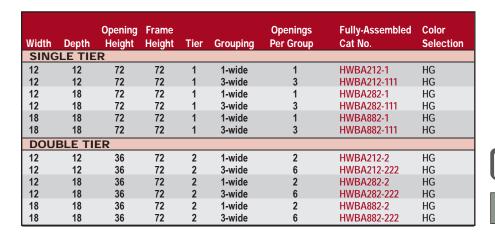

Lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door.

Hallowell-List













EMERGENCY RESPONSE ALL-WELDED EXTREME PERFORMANCE LOCKERS





Perfect For Swat, Police, Fire & Emergency Response Teams



BODY CONSTRUCTION: 16 gauge, Unibody allwelded, galvannealed corrosion resistant sheet steel. Back is 18 gauge

BODY STYLES: Single tier, custom designed for specialized use

DOOR: 14 gauge louvered double doors with full-height welded in stiffener

HINGES: Continuous piano type

HANDLE: 3-point high-security turn handle latching handle

HOOKS: Two single wall hooks in wardrobe area, single hook in opening below security box, single hook on door.

COAT RODS: One at vertical wardrobe section

SHELVES: Two full-width at top, one partial shelf above security box

LOCKS: Includes built in key lock for main and security box

SIZE: Wardrobe locker 24" x 24" x 72"

OPTIONAL: Base/drawer unit 24" x 36" x 18"

STANDARD UPPER UNIT SIZES

Widths: 24", 30", 36" Depths: 18", 24" Height: 72"

STANDARD BASE UNIT SIZES Widths: 24", 30", 36" Depths: 30" 36" Height: 18"

OPTIONS


- PEGBOARD DOOR STIFFENER
- BOOT TRAY
- BODY ARMOR DRYING RACK
- PERSONAL ITEMS ACCESSORY TRAY
- LOUVERED DRAWER FRONT
- PERFORATED TOP
- AIRFLOW GAP SHELVES SPACED AWAY FROM BACK FOR ADDED AIRFLOW



Standard electrical knockout at locker top right rear corner

- Utility belt hook
- Security box
- One side pocket shelf for a 1" thick clipboard
- 🖌 Full height piano hinge
- Finish is standard Powder-coat
- Full height door stiffeners
- Lower storage area with pull-out drawer
- Auto-Locking drawer is activated by upper doors
- Electrical Knockout in locker top - outlet and wiring by others





FASK FORCE XP PERFORMANCE LOCKERS

ENGINEERED TO LAST A LIFETIME





Large lockable storage compartment doubles as a seat finished in laminated maple wood.



Available with and without base storage compartment and seat

	Width	Depth	Opening Height	Unit Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
SINGLE TI	ER								
Without base	24	24	72	72	1	1-wide	1	HERL442-1SL-G	HG
With base	24	24/36	72	90	1	1-wide	1	HERL442-1SL-B-G	HG





11



PERFECT FOR SPORTS EQUIPMENT, GEAR AND TOOL STORAGE



Base Model

With Upper Security Box With Lower Foot Locker

With Upper Security Box And Foot Locker

BASE: 14 ga. Channel Base at both front and back

SIDES: 13 ga. 1/2" flattened expanded

ACCESSORIES: Includes 1/2" diameter

metal fully-framed on all four sides

coat rod, and 2 Coat hooks

FEATURES:

BODY COMPONENTS: 16 ga. tubular vertical frame members, 16 gauge body with 18 gauge back

TOP/BOTTOM/HAT SHELF 16 ga.

solid cold rolled sheet steel

OPTIONS

SECURITY BOX DOOR: 14 gauge steel with a thru-the-door friction catch door pull, padlock hasp and a 16 gauge continuous piano hinge

FOOT LOCKER: 14 gauge steel with stiffener sections and padlock loop.



UPGRADED Antimicrobial Box Door Finger Pulls

All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

Width	Depth	Height	Grouping	Catalog #
BASE	MODEL			
24"	18"	74-3/4"	1-wide	WSNN482-1C
24"	24"	74-3/4"	1-wide	WSNN442-1C
WITH	OPTION		SECURITY	BOX
24"	18"	74-3/4"	1-wide	WSBN482-1C
24"	24"	74-3/4"	1-wide	WSBN442-1C
WITH	OPTION	AL LOWE	R FOOT LOC	KER
24"	18"	74-3/4"	1-wide	WSNF482-1C
24"	24"	74-3/4"	1-wide	WSNF442-1C
WITH	OPTION/	AL SECUR	ITY BOX AN	ID FOOT LOCKER
24"	18"	74-3/4"	1-wide	WSBF482-1C
24"	24"	74-3/4"	1-wide	WSBF442-1C



SECURITY-BOX

STEEL COAT ROD

VENTILATED FOOT LOCKER

ALL-WELDED MILITARY SPEC LOCKERS





Rough, Tough and Ready to Go!

MILITARY SPEC TA-50 FULLY-FRAMED ALL-WELDED LOCKERS

Manufactured with top quality steel and built to strict specifications, our TA-50 Military Grade Locker is the solution to all your storage challenges. Secure, durable and guaranteed to last a lifetime.



725 DARK GRAY (HG)





Rugged 3/16" Steel Handle is prepared for use with a padlock. Doors are pre-punched to accommodate a built-in combination or key lock if desired. Locks are available at an additional cost

FEATURES:

BODY CONSTRUCTION: Fully-framed allwelded construction with 3/4" flattened expanded metal sides, 16 gauge solid top & bottom and 18 gauge solid back. Base is heavy 14 gauge on all four sides. High grade custom blend powder coat finish.

DOORS: Heavy-duty 14 gauge diamond perforated doors are standard.



DOOR HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges.

HANDLE: 3-point turn-handle latching with 3/8" diameter locking rods for maximum security.

SHELF: 16 gauge solid upper shelf.

EQUIPPED: 1 Coat rod and 3 rear hooks are located under upper shelf.



Width	Depth	Opening Height	Frame Height	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
TA-50							
42	24	84	84	1-wide	1	TA50-422484-1	HG





ALL-WELDED HIGH SECURITY LOCKERS



Hallowell SecurityMax heavy-duty all-welded lockers offer the highest available security by incorporating an extra heavy-duty three point turn-handle locking mechanism and the versatility of adjustable interior shelves. Available in ventilated and solid locker versions.

SecurityMax lockers are ideal where heavy-duty and versatile storage is needed for tools, gear, sports equipment, uniforms and clothing.



VENTILATED MODEL

FEATURES:

BODY CONSTRUCTION: All-welded construction. 16 gauge heavy-duty body and 18 gauge back, Sides formed to be integral with front vertical frame and are reinforced using two front-to-back channel stiffeners welded to the underside.

BODY STYLES: One tier, one wide. Available in solid or ventilated versions

HANDLE: Cremone 3-point high-security turn handle latching with heavy-duty 3/8" lock rods which engage the top and bottom locker frames while the cam engages the frame at the door jamb near the handle

DOOR: 14 gauge door with a full height welded in door stiffener

HINGES: Continuous piano type

SHELVES: Upper welded hat shelf. Additional shelves can be ordered and are adjustable on 3" centers. coat rod: 3/8" diameter rod is welded to underside of upper shelf

HOOKS: Two single back hooks



3 POINT HIGH SECURITY TURN HANDLE LATCHING

Width	Depth	Opening Height	Unit Height	Tier	Grouping	Included Shelves	Fully-Assembled Cat No.	Color Selection
VENT	ILATE	D MODI	ELS					
18	22	72	72	1	1-wide	1	HTA822AS1	PL
24	22	72	72	1	1-wide	1	HTA422AS1	PL
SOLIE	D MODE	ELS						
18	22	72	72	1	1-wide	1	HTC822AS1	PL
24	22	72	72	1	1-wide	1	HTC422AS1	PL
ADDI	FIONAL	SHEL	/ES					
18	22						HTAS1822	PL
24	22						HTAS2422	PL



ELEGANT DESIGN FOR REFINED SPACES

SINGLE TIER,

1 WIDE

1 OPENING

Hallowell-List.com

SIX TIER,

3 WIDE

18 OPENINGS

BLACK TIE LOCKERS

16-Ga. Continuous Hinges Powder-Coated Finish Black Body And Frame

All the features of Hallowell Premium wardrobe and box lockers with the added benefit of a stylish black body and frame and the choice of black, red or light gray doors.



UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

DOOR: Wardrobe doors are 16 gauge, box doors are 18 gauge. Louvered for ventilation

HINGES: Continuous piano type

HANDLE: Stainless steel recessed handle with multi-point gravity lift-type latching for wardrobe doors. Box doors have friction catch finger pull handle.

HOOKS: Single and double tier models include two single prong hooks. Triple tier includes one double prong hook. No hooks at six tier.

COAT RODS: One at vertical wardrobe section.

ΞĒ

==

THREE TIER,

1 WIDE

3 OPENINGS

TWO TIER,

3 WIDE

6 OPENINGS

SHELVES: Single tier model includes a hat shelf.

			Overall ensions		Door Color	UNASSEMBLED	ASSEMBLED	STOCK COLOR
		W	H	D D		Item No.	Item No.	COLON
SINGL	E-TIER WA	RDROB	BE					BODY / FRAME DOOR COLOF
1 wide	1 opening	12	72	18	Black	U1282-1ME	U1282-1A-ME	COLOR CHOICES
3 wide	3 openings	36	72	18	Black	U3282-1ME	U3282-1A-ME	COLOR CHOICES
1 wide	1 opening	12	72	18	Light Gray	U1282-1MP	U1282-1A-MP	
3 wide	3 openings	36	72	18	Light Gray	U3282-1MP	U3282-1A-MP	708
1 wide	1 opening	12	72	18	Red	U1282-1MR	U1282-1A-MR	BLACK
3 wide	3 openings	36	72	18	Red	U3282-1MR	U3282-1A-MR	(ME)
DOUBL	LE-TIER WA	ARDRO	BE					
1 wide	2 openings	12	72	18	Black	U1282-2ME	U1282-2AME	708 711
3 wide	6 openings	36	72	18	Black	U3282-2ME	U3282-2AME	ВГАСК ПЕНТ СВАМ
1 wide	2 openings	12	72	18	Light Gray	U1282-2MP	U1282-2AMP	WF .
3 wide	6 openings	36	72	18	Light Gray	U3282-2MP	U3282-2AMP	(mb) (PL)
1 wide	2 openings	12	72	18	Red	U1282-2MR	U1282-2AMR	
3 wide	6 openings	36	72	18	Red	U3282-2MR	U3282-2AMP	721
TRIPL	E-TIER WA	RDROB	E					RELAY RED
1 wide	3 openings	12	72	18	Black	U1282-3ME	U1282-3AME	(RR)
3 wide	9 openings	36	72	18	Black	U3282-3ME	U3282-3AME	
1 wide	2 openings	12	72	18	Light Gray	U1282-3MP	U1282-3AMP	
3 wide	9 openings	36	72	18	Light Gray	U3282-3MP	U3282-3AMP	
1 wide	3 openings	12	72	18	Red	U1282-3MR	U1282-3AMR	
3 wide	9 openings	36	72	18	Red	U3282-3MR	U3282-3AMR	
SIX-TI	ER BOX							
1 wide	6 openings	12	72	18	Black	U1282-6ME	U1282-6AME	
3 wide	18 openings	36	72	18	Black	U3282-6ME	U3282-6AME	
1 wide	6 openings	12	72	18	Light Gray	U1282-6MP	U1282-6AMP	
3 wide	18 openings	36	72	18	Light Gray	U3282-6MP	U3282-6AMP	
1 wide	6 openings	12	72	18	Red	U1282-6MR	U1282-6AMR	
3 wide	18 openings	36	72	18	Red	U3282-6MR	U3282-6AMR	



HEAVY DUTY ALL-WELDED HIGH VENTILATED LOCKERS



Tried and tested by students in thousands of middle and high schools nationwide, these all-welded athletic lockers are ideal for use in institutional, industrial, fitness, manufacturing and distribution sectors.

FEATURES:

BODY CONSTRUCTION: All-welded construction, 16 gauge body, 18 gauge back. Sides are diamond perforated

DOOR: 14 gauge, diamond perforated for ventilation

HINGES: Continuous piano type

HANDLE: Stainless steel recessed handle with multi-point gravity lift-type latching for wardrobe doors. Box doors have friction catch finger pull handle.

HOOKS: Single and double tier models include two single prong hooks . Triple tier includes one double prong hook. No hooks at six tier.

SHELVES: Single tier model includes a hat shelf.







All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria



Single Tier, 1 wide 1 opening Single Tier, 3 wide 3 opening



ELEGANT FOR THE CLUB DURABLE FOR THE GYM

Hallowell-List.com

PE

& GYM STOCK LOCKERS

CERTIFIED GOLD

Hallowell



TWO TIER, 1 WIDE 2 OPENING

TWO TIER, 3 WIDE **6 OPENING** **TWO TIER, SIX TIER COMBO** 3 WIDE **14 OPENING**

			Overall ensions		Item No.	ST CO
		W	н	D		
SINGL	E-TIER WA	RDROE	BE			708
1 wide	1 opening	12	72	18	AWA282-1MR	BLACK BOD (ME)
3 wide	3 openings	36	72	18	AWA282-111MR	
DOUB	LE-TIER WA	ARDRO	BE			721 DELAV DED DO
1 wide	2 openings	12	72	18	AWA282-2MR	RELAY RED DO (RR)
3 wide	6 openings	36	72	18	AWA282-222MR	uiin
COMB	O UNIT					
3 wide	14 openings	36	72	18	AWA282-626MR	



708 Black Body (ME)
721 RELAY RED DOOR (RR)





Easily Manage Tenant Package Delivery HALLOWELL® 24/7 PARCEL LOCKER LETS YOU RECEIVE AND PICK UP ANYTIME.

CONCIERGE...

- **1. Receives package for tenant**
- 2. Places package in locker
- 3. Locks door using 4-digit PIN
- 4. Texts or emails Locker Number and PIN to Tenant

TENANT, AT HIS/HER CONVENIENCE...

- 1. Enters PIN into lock of appropriate locker
- 2. Removes package
- 3. Closes door of now empty locker, PIN is erased
- 4. Locker is ready for the next package

FEATURES:

BODY CONSTRUCTION: All-welded construction, 16 gauge body, 18 gauge back.DOOR: 14 gauge solid door with electronic lockHINGES: Continuous piano type

SHIPS FULLY-ASSEMBLED

522 101111	500 State
	-
	1000
520	



HEPL842-99 18-DOOR PARCEL LOCKER 36" x 24" x 72" Unit (18) 18" x 8" Doors HEPL842-77 14-DOOR PARCEL LOCKER 36" x 24" x 72" Unit (12) 18" x 8" Doors (2) 18" x 24" Doors





The locker features the NEW Hallowell DIGITECH[™] H1 digital lock, a slimline ultra modern look and simple to operate.

LOCKER FEATURES

- All-Welded Unibody Construction
- 14 Gauge solid steel doors with 16 Gauge piano hinge
- 16 Gauge solid steel body & 18 Gauge steel backs





· DigiTech H1 electronic locks

· Ships fully-assembled

DIGITECH H1 ELECTRONIC LOCKS

SECURITY CODE LOCK FEATURES • 8-digit master and sub-master codes for two levels of management security.

CR123 LITHIUM BATTERY (INCLUDED)

Provides over 10,000 normal uses.
 LED's Flash to indicate low battery level

MASTER KEY

Locker can be opened with master key if batteries are exhausted.

PERMANENT MODE TOO

 User enters a pre-programmed 4-digit code to unlock and use locker repeatedly.



Hallowell-List.



 Secure pop-out turn handle (flush when locked)





HEPL842-55 10-DOOR PARCEL LOCKER 36" x 24" x 72" Unit (6) 18" x 8" Doors (4) 18" x 24" Doors



HEPL842-33 6-DOOR PARCEL LOCKER 36" x 24" x 72" Unit (6) 18" x 24" Doors



HEPL842-22 4-DOOR PARCEL LOCKER 36" x 24" x 72" Unit (4) 18" x 36"Doors



HEPL842-11 2-DOOR PARCEL LOCKER 36" x 24" x 72" Unit (2) 18" x 72" Doors

Width	Depth	Height	Doors	Openings sizes	Assembled Cat No.	Color	
PAR	CEL LO	OCKERS					
36	24	72	18	(18) 18" x 8"	HEPL842-99	PL	
36	24	72	14	(12) 18" x 8" & (2) 18" x 24"	HEPL842-77	PL	
36	24	72	10	(6) 18" x 8" & (4) 18" x 24"	HEPL842-55	PL	
36	24	72	6	(6) 18" x 24"	HEPL842-33	PL	
36	24	72	4	(4) 18" x 36"	HEPL842-22	PL	
36	24	72	2	(2) 18" x 72"	HEPL842-11	PL	





OVERSIZED STORAGE SOLUTION



Hallowell® Bulk Storage Lockers are the ideal solution for condos and any facility that requires additional secure storage capability.

Hallowell® Bulk Storage Lockers are the most economical way to provide safe and secure storage in virtually any facility. Cost effectiveness and ease of installation make Bulk Storage Lockers the perfect choice when additional storage is needed. Choose from in-stock or custom sizes to fit your needs.

The use of Hallowell® Bulk Storage Lockers creates an esthetically appealing installation that when properly promoted can be a tremendous asset to the building and of great value to the users.

RIGIDITY • STRENGTH • SAFETY • SECURITY

Bulk Storage Lockers feature SafeMesh84[™], the MESH **D**4 industry's strongest and safest expanded metal.

84% MORE STEEL THAN 3/4" MESH

84% MORE STEEL = MORE RIGID UNIT

1/2" MESH KEEPS FINGERS OUT

REDUCES RISK OF LOSS, THEFT AND CONTENT DAMAGE

WE USE



1/2" MESH 16 GAUGE FLATTENED EXPANDED



THEY USE 3/4" MESH 16 GAUGE FLATTENED EXPANDED

- SINGLE & DOUBLE TIER MODELS
- ECONOMICAL

BULK STORAGE LOCKERS

- SECURE
- DURABLE

- FAST & EASY INSTALLATION • LOW LIFE-CYCLE COST
 - ATTRACTIVE
 - USER FRIENDLY

Shown with optional expanded metal top

13" transom

Heavy-duty 2-knuckle lift off hinge


Welded door brace for added rigidity

Welded padlock hasp and ergonomic welded-on door pull

1/2" 16 gauge flattened expanded metal doors and sides

Heavy-gauge vertical frame channels and

Horizontal frame angles

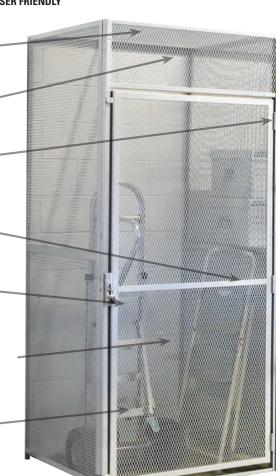

SINGLE TIER STARTER UNIT



Padlock hasp & Ergonomic one piece door pull is welded to the door frame.



Heavy-Duty 2-knuckle lift off hinges and door stops are welded to the frame for extra strength and security for a more finished and attractive appearance.



Optional 16 gauge 1/2" expanded metal top makes for security & rigidity for a higher level of protection from theft







Hallowell-List.com


Easy Custom Installations

Hallowell® Bulk Storage Lockers' unique construction provides for a simple, easy way of handling interference from overhead pipes and/or ducts.





VIEW OF PIPE THROUGH TRANSOM (OR DIVIDER) WITH REPAIR ANGLE.



SHOWING CUT OUT (WITH REPAIR ANGLES) TO ALLOW FOR INTERFERING DUCT.

REPAIR ANGLES

Repair Angle 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle. **RED denotes stock sizes. Custom sizes are also available.** Tops are recommended for situations where the ceiling height is 8'-6" or more when using standard 7'-6" high component modules.

Shelves are used as dividers between top and bottom openings of double tier lockers. May also be used in single tier lockers for additional floor space and may be shorter than depth of locker to provide space for long items.

Backs are required for back-to-back installations or where a single row is set away from a wall.

Bottoms are recommended for use on all single or double tier lockers if dampness prevails.

UNITS AVAILABLE RIGHT-HAND OR LEFT-HAND HINGED • SINGLE TIER: • DOUBLE TIER: OVERALL HEIGHT 90" OVERALL HEIGHT 90"

OVERALL HEIGHT 90" UPPER OPENING HEIGHT: 31-1/2" LOWER OPENING HEIGHT: 42"

Note: In the interest of safety, all lockers must be securely anchored to the floor and/or wall.

OPENING HEIGHT: 75-1/2"

	STORAGE LOCKER STOCK SIZES
	Standard Sizes available in single & double tier configuration.
Width	3'-0'', 4'-0''
Depths	3'-0'', 4'-0'', 5'-0''
Height	7'-6''

			STARTER		ADDEF	RUNITS
W	D	н	Part No.	Part No.	Part No.	Part No.
			Right Hinged)	(Left Hinged)	Right Hinged)	(Left Hinged)
SING	<u>LE TIE</u>	R				
36	36	90	BSL363690-R-1S-HG	BSL363690-L-1S-HG	BSL363690-R-1A-HG	BSL363690-L-1A-HG
36	48	90	BSL364890-R-1S-HG	BSL364890-L-1S-HG	BSL364890-R-1A-HG	BSL364890-L-1A-HG
36	60	90	BSL366090-R-1S-HG	BSL366090-L-1S-HG	BSL366090-R-1A-HG	BSL366090-L-1A-HG
48	36	90	BSL483690-R-1S-HG	BSL483690-L-1S-HG	BSL483690-R-1A-HG	BSL483690-L-1A-HG
48	48	90	BSL484890-R-1S-HG	BSL484890-L-1S-HG	BSL484890-R-1A-HG	BSL484890-L-1A-HG
48	60	90	BSL486090-R-1S-HG	BSL486090-L-1S-HG	BSL486090-R-1A-HG	BSL486090-L-1A-HG
DOUE	BLE TI	ER				
36	36	45	BSL363690-R-2S-HG	BSL363690-L-2S-HG	BSL363690-R-2A-HG	BSL363690-L-2A-HG
36	48	45	BSL364890-R-2S-HG	BSL364890-L-2S-HG	BSL364890-R-2A-HG	BSL364890-L-2A-HG
36	60	45	BSL366090-R-2S-HG	BSL366090-L-2S-HG	BSL366090-R-2A-HG	BSL366090-L-2A-HG
48	36	45	BSL483690-R-2S-HG	BSL483690-L-2S-HG	BSL483690-R-2A-HG	BSL483690-L-2A-HG
48	48	45	BSL484890-R-2S-HG	BSL484890-L-2S-HG	BSL484890-R-2A-HG	BSL484890-L-2A-HG
48	60	45	BSL486090-R-2S-HG	BSL486090-L-2S-HG	BSL486090-R-2A-HG	BSL486090-L-2A-HG

ACCESS W	SORIES FOR BULI D H	STORAGE LOCKERS Part No.
	ANELS	
36	36	4803636HG
36	48	4803648HG
36	60	4803660HG
48	36	4804836HG
48	48	4804848HG
48	60	4804860HG
FRON	T EXTENSION	I PANELS
6	90	4600690HG
12	90	4601290HG
18	90	4601890HG
24	90	4602490HG
ВАСК	PANELS	
36	90	4703690HG
48	90	4704890HG
REPAI	R ANGLES	
36		20100HG







STEP UP YOUR RECRUITING GAME!



Reinforce your commitment to your players!

Equip them with the industry's finest all-wood sport lockers. Recruiter™ custom wood sport lockers are made to order, and offer a variety of different options allowing you to tailor your locker room to your team's specific requirements.

Optional Features



Optional LED Lighting under locker top and/or under shelf



Optional USB & 110 power outlet inside upper security box



Optional duel fan ventilation system for forced air ventilation of foot locker







BASKETBALL



FOOTBALL



HOCKEY

HEIRLOOM QUALITY DESIGNED TO LAST A LIFETIME



In addition to our standard designs and sizes, our engineers are readily available to assist you in custom designing a locker to meet your specific needs. Be it a fitness center,

team locker room, country club or resort health spa, we stand behind our product with a full one year warranty that covers defects in materials and workmanship.

PRODUCTION ITEMS HALLOWELL-LIST.COM FOR LEAD TIMES

Five Side Options





Set Back Sides

Full Curve Sides



Standard Sides





CUSTOM WOOD SPORT LOCKERS

Hallowell-List.com

Half Curve Sides

Optional Features



Name plate holders



UV Full Color Print on security box door





Padded Seat Cushion



Shoulder pad & Helmet rack



Expanded metal side inserts for additional ventilation

Foot locker front panel mesh insert



Optional Bat / Lacrosse Stick Caddy

• ELECTRONIC LOCK

LOCK OPTIONS: • PADLOCK

BUILT IN COMBINATION LOCK

• MECHANICAL LOCK



ALL-WELDED SCHOOL CUBBIES



PRODUCTION

ITEMS HALLOWELL-LIST.COM FOR LEAD TIMES

> Hallowell Cubbie Locker line is designed to meet the needs of early childhood and elementary school classrooms. Combining our unibody all-welded locker construction and the added safety features required for this specialized market, we offer four distinct models designed to meet any child's personal storage needs. Hallowell Cubbies are backed by our written lifetime Warranty.





SAFETY, DURABILITY VALUE...

Backpack Cubbie



HEMMED AND BEADED EDGES **ELIMINATE SHARP EDGES**

• 1 •

NUMBER PLATE IN BOTTOM OF CUBBIE SO CHILDREN CAN EASILY IDENTIFY THEIR CUBBIE SPACE.

MODEL SIZES	WIDTH	DEPTH	HEIGHT
PRIMARY CUBBIE	12", 15"	12", 16″	48″
PRIMARY II CUBBIE	12", 15"	12", 16″	48″
PRIMARY JR. CUBBIE	12", 15"	12", 16″	24″
BACKPACK CUBBIE	15", 18"	12", 16″	48″

FEATURES

BODY CONSTRUCTION: Unibody all-welded 16 gauge steel construction, backs are 18 gauge, bottom is galvanneal sheet steel for maximum corrosion resistance,

hemmed and beaded edges are safe to the touch

BODY STYLES: Open design, 4 body styles

SHELVES: 16 gauge welded to body for added rigidity with a beaded leading edge for added safety

NOTES: Easily secures to wall and floor for added safety, Low installation costs, reduced installation time, low maintenance, low life-cycle cost, lifetime warranty, insect and termite proof. All welded cubbies will ship in multiple column units up to 60" wide to meet individual job site conditions.



PRODUCTION ORDERS CONTACT US AT 866.566.0500

ALL EDGES ARE ROUNDED OR HEMMED FOR



HSL-00 Open Front Gear Lockers





BASE MODEL OFFERS UPPER HAT SHELF AND COAT HOOKS

SHOWN WITH OPTIONAL 12" WIDE SECURITY BOX, STAINLESS STEEL COAT ROD AND FOOT LOCKER/SEAT

These lockers feature our unique Unibody Design which provides unsurpassed strength and durability.

PRODUCTION ITEMS HALLOWELL-LIST.COM

Our complete line-up of open-front gear lockers are specifically engineered for High School, Collegiate and Professional team organizations who demand high performance equipment storage solutions.

The all-welded Open Front Gear lockers are designed to accommodate a wide variety of equipment and apparel while allowing maximum ventilation.

The base model includes one upper hat shelf with a compliment of coat hooks. You can add a choice from three upper security compartments for personal storage: a small wallet security box, a 12" wide side hinged security box or the full width top hinged security compartment.

In the lower area, you can add a shelf/seat or opt for the foot locker/seat for a lockable equipment storage area. You can finish off your sport locker with our optional stainless steel coat rod.

Open Front Gear lockers feature our all-welded Unibody design which provides two front frame channels between sides of multiple column units and integral sides which are diamond perforated for ventilation.

SECURITY-PLUS™ VENTILATED FRONT PANEL





ALL-WELDED OPEN-FRONT SPORT LOCKERS

Hallowell-List.com

All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.



Box Door Finger Pulls



OPTIONAL STAINLESS STEEL COAT ROD

UNDERSIDE OF FOOT LOCKER SEAT IS REINFORCED TO SUPPORT TODAY'S ATHLETE.

LOCKER SIZES:

Widths 12", 15", 18", 24", 30", 33" and 36" Depths 12", 16", 18", 22" Column Heights 60", 72", 84"

Note: Lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.



SHOWN WITH OPTIONAL WALLET SECURITY BOX AND STAINLESS STEEL COAT ROD





SHOWN WITH OPTIONAL FULL-WIDTH SECURITY COMPARTMENT. AND STAINLESS STEEL COAT ROD, AND LOWER SEAT/SHELF. DOOR INCLUDES SECURITY-PLUS™ VENTILATION.







HTHV-01 Turn-handle Ventilated Lockers

PRODUCTION

VISIT HALLOWELL-LIST.COM

		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,							
1-	set.	1	-	-		*****		****	
				- I - Contraction					:
				un					4.88
******	WWW			-					
	6					*****		/////	
1		3-Point pro turn-handl latching			(); {}	4444	4418	4000	****

STANDARD SIZES FOR ALL-WELDED WARDROBE LOCKERS SINGLE TIER DOUBLE TIER TRIPLE TIER Widths 9", 12", 15", 18", 24" 9", 12", 15", 18", 24" 9", 12", 15", 18", 24" Depths 12", 16", 18", 22' 12", 16", 18", 22" 12", 16", 18", 22" 12", 16", 18", 22"

 Opening Heights
 48", 60", 72"
 24", 30", 36"
 20", 24"

 Nominal Column Heights
 48", 60", 72"
 48", 60", 72"
 60", 72"

NOTE: All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions

HGLV-02 Gravity Latch Ventilated Lockers





UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

ANTIMICROBIAL

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

FEATURES:

UNIBODY All-Welded

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, and louvered door styles are available

HANDLE: 3-point turn-handle latching

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 3-point turn-handle latching engaging at frame top, bottom and center side of door, 3/8" diameter lock rods are the heaviest in the industry, 3/16" turn-handle welded to 11 gauge cam, 11 gauge lock plate keeper is welded to center side of frame

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See All Welded Chart for standard wardrobe lockers

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, Safety-View and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SEE ABOVE CHART FOR STANDARD SIZES

UNIBODY ALL-WELDED WARRA

HGLS-03 Gravity Latch Solid Sides





ANTIMICROBIAL PROTECTION

UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

HSPV-04 Single-Point Ventilated Lockers





Deep drawn

handle with

single-point latching is

standard

stainless steel recessed

Hallowell HSPV-04 lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torquefree door. A 1-1/2" wide stiffener will be furnished for 9" wide HSPV-04 doors. FEATURES:

PRODUCTION

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

Hallowell-List.com

DOORS: 14 gauge louvered doors are standard. Plain,

Secure-Air-Flow, Safety-View and diamond perforated door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See All Welded Chart for standard wardrobe lockers

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

doors: 14 gauge diamond perforated doors and full-height door stiffener are standard. Plain, Secure-Air-Flow and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle is standard.

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet latching

system, 11 gauge MIG welded latch

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See All Welded Chart for standard wardrobe lockers





PRODUCTION ITEMS

HALLOWELL-LIST.COM

Deep drawn stainless steel recessed handle with single-point latching

HSPS-05 Single-Point Solid Lockers

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

UNIBODY

DOORS: 14 gauge plain doors and a full-height door stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet latching system, 11 gauge MIG welded latch

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and

72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier,1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See All Welded Chart for standard wardrobe lockers



Hallowell HSPS-05 lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide HSPS-05 doors.



HBLV-06 Ventilated Box Lockers

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base. 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Secure-Air-Flow and plain door styles are available.

HANDLE/LATCHING: Single-point thru-the-door projecting finger pull handle with padlock hasp. Optional deep-drawn seamless stainless steel recessed handle is available

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high

SIZES: See chart below for standard box locker sizes

NOTE: 8" & 9" high box doors are top hinged with concealed 3/8" diameter continuous hinge rod

1 HI I I I



Single-point thru-the-door finger > pull padlock hasp

Optional padlock strike plates for box doors protect finish from being marred by padlock

UPGRADED Antimicrobial Recessed Handle Finger Lift Cover & Box Door Finger Pulls Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

			ox locker openings 12", ox locker openings 12", 1	
		TIER	OPENING HEIGHT	NOMINAL COLUMN HEIGHTS
4		Four Tier	12", 15", 18"	48", 60", 72"
TIER		Five Tier	12", 14.4"	60", 72"
TO	-	Six Tier	8", 10", 12"	48", 60", 72"
9 TIER		Seven Tier	(6) 10" & (1) 12"	72"
	Ľ	Eight Tier	8", 9"	64", 72"
		Nine Tier	8"	72"
			the actual units supplied will standard width units up to 60	be fabricated to meet layout and " wide

401



UNIBODY ALL-WELDED

HESL-07 Equipment Storage Lockers (TA-50)

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back. Optional solid sides are available

DOORS: 14 gauge diamond perforated doors with a full height door

stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

HANDLE: 3-point turn-handle

DOOR STRIKE: Continuous vertical door strike at both hinge sides

LATCHING: 3/16" turn-handle welded to 11 gauge cam engaging frame at top, bottom and center side of door. 3/8" diameter lock rods

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf located 12" down from top, 16 gauge lower shelf located 18" up from bottom

COAT ROD: Stainless steel full-width coat rod located under hat shelf **WARRANTY:** Lifetime

EQUIPMENT STOR	AGE LOCKER SIZES
Widths	24", 30", 36", 48"
Depths	12", 16", 18", 22"
Heights	60", 72", 84"



Single Tier, 1 wide, 1 opening Double Tier, Triple Tier, 1 wide, 1 wide, 2 openings 3 openings

Z-Tier A unique multi-height storage with extended hanging space on one side and built in shelf on the other, its like a two tier with the space of a single tier.



Equipment Storage lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.





PRODUCTION ITEMS

HALLOWELL-LIST.COM

3-point projecting turn-handle latching is standard.

Shown with optional Padlock Strike Plate



Hallowell-List.com

Shown with optional padlock strike plate

Premium KD Wardrobe Lockers

FEATURES: (DOORS 20" HIGH AND HIGHER)

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide, are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle door strike, continuous vertical door strike at hinge & latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity

- lift-type multi-point spring loaded latching:
 - 3-point latching for openings 48" high and higher
 - 2-point latching for openings 20" high thru 36" high
- HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See Premium KD Chart for standard wardrobe lockers







UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria



Latch hook is welded to frame





EQUIPMENT & PREMIUM LOCKERS

ECONOMY AND VERSATILITY

Premium KD Box Lockers

FEATURES: (DOORS 18" HIGH AND UNDER)

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 18 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View Plus and diamond perforated door styles are available

PRODUCTION

ITEMS

HALLOWELL-LIST.COM

FRAME: 16 gauge frame

llow

Hallowell-List.com

HANDLE: Projecting finger pull

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point thru-the-door finger pull padlock hasp

HINGES: 16 gauge continuous piano hinge

NOTES: All production KD lockers are supplied without legs unless otherwise specified. Safety-View Plus polycarbonate doors are available for 12" wide x 12" high five and six tier box doors only

WARRANTY: 2 years

SIZES: See Premium KD Chart for standard Box lockers

-



Premium KD Specialty Lockers

DUPLEX

Duplex Lockers are the most economical full length lockers available. Duplex lockers provide two completely private lockers in each frame. One hat shelf and two single wall hooks are standard in each wardrobe opening. Coat rod is optional.

UPGRADES ALL BODY COMPONENTS TO 16 GAUGE WITH 18 GAUGE BACK

TWO-PERSON

Two-Person Lockers provide ample storage space for two users in a 15" wide space. Upper box doors are controlled by command latches located in the corresponding lower compartment. Two single hooks per wardrobe opening is standard. Coat rod is optional. Box door single-point thru-thedoor finger pull padlock hasp



Optional padlock strike plates for box doors protect finish from being marred by padlock



UPGRADED Antimicrobial Box Door Finger Pulls

All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.





PREMIUM KD LOCKER SIZES	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
WARDROBE				
SINGLE TIER	9″ 12″ 15″ 18″ 24″	12" 15" 18" 21" 24"	36" 48" 60" 72"	36″ 48″ 60″ 72″
DOUBLE TIER	9″ 12″ 15″ 18″	12″ 15″ 18″ 21″	30″ 36″	60″ 72″
TRIPLE TIER	9″ 12″ 15″ 18″	12″ 15″ 18″ 21″	20″ 24″	60″ 72″
BOX				
FOUR TIER	12″ 15″	12″ 15″ 18″	15″ 18″	60″ 72″
FIVE TIER	12″ 15″	12" 15" 18"	15″ 14.4″	60″ 72″
SIX TIER	12″ 15″	12" 15" 18"	12″	72″
SPECIALTY				
TWO PERSON	15″ 18″	12″ 15″ 18″	NA	60″ 72″
DUPLEX	15″	12" 15" 18"	60″ 72″	60″ 72″
SIXTEEN PERSON	72″	18″	12″	78" (Includes 6" legs)
FOUR WIDE WALL MOUNT	48″	18″	12″	14-3/4″



4 openings



5 openings

Six Tier, 1 wide, 6 openings

DuplexTwo-PersonDouble Tier,Four Tier,2 wide, 2 openings2 wide, 4 openings



UPGRADED Antimicrobial Recessed Handle Finger Lift Cover & Box Door Finger Pulls

Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.



THE STANDARD FOR QUIET LOCKERS

Silent Standard Quiet Quiet

Double Tier, 1 wide. 2 openings

Double Tier, 1 wide, 2 openings

Standard And Whisper Quiet KD Lockers FEATURES:

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge plain doors (18 gauge for 9" wide), Sound deadening panel and vinyl coated latching for Whisper quiet lockers only

PRODUCTION EMS

HALLOWELL-LIST.COM

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep drawn stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge & latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks & 1-double hook is standard. 1-double hook only for triple tier & 1-double and 1-single hook for 9" wide openings 30" & higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: Production KD lockers are supplied without legs unless otherwise specified. Standard Quiet and Artisan Quiet lockers are available with plain doors only. Additional perforations/louvers in the door will increase decibel levels thus reducing the efficiency of our quiet design.

SIZES: See Premium KD Chart for standard wardrobe lockers

ANTIMICROBIAL UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria





Single Tier, 1 wide. 1 openings

Double Tier, Triple Tier. 1 wide. 1 wide. 2 openings 3 openings

Maintenance-Free[™] Quiet KD Lockers (MFQ) **FEATURES**:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge, solid

HINGES: Continuous piano type

HANDLE: Deep drawn stainless steel recessed handle with single-point latching. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single wall hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf for single tier openings 60" and 72" WARRANTY: 2 years

SIZES: See Premium KD Chart for standard wardrobe lockers







Hallowell-List.com





Ventilated top and bottom door flanges



Deep drawn stainless steel recessed handle with gravity lift-type latching











11 gauge single-point latch



Deep drawn stainless steel recessed handle with single-point latching



MFQ lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide MFQ doors.





Triple Tier,

1 wide,

3 openings

HEAVY-DUTY LOCKERS

Heavy-Duty Corridor KD Lockers (HDC)

Heavy-Duty Corridor lockers, commonly known as HDC lockers, are designed to include all the great features of our Standard KD wardrobe lockers with the doors upgraded to 14 gauge.

FEATURES:

BODY CONSTRUCTION: Knock down with 24 gauge solid body components **DOORS:** 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle door strike: Continuous vertical door strike at both hinge and latch side **LATCHING:** 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1- single hook for 9" wide openings 30" and higher **SHELVES:** Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

SIZES: See Premium KD Chart for standard wardrobe lockers

ANTIMICROBIAL UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

PROTECTION All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria



Deep drawn stainless steel recessed handle with gravity lift-type latching.

DYEAR WARRANTY



Double Tier,

1 wide.

2 openings

Double Tier, 1 wide, 2 openings



Six Tier,

1 wide.

Heavy-Duty Ventilated KD Lockers (HDV) FEATURES:

BODY CONSTRUCTION (WARDROBE & BOX LOCKERS): Knock down with 16 gauge solid top, bottom and intermediate shelves, 16 gauge diamond perforated sides, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Security-Plus and Safety-View door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HINGES: 16 gauge continuous piano hinge

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

WARDROBE LOCKERS (Doors 20" and higher):

HANDLE: Deep-drawn seamless stainless steel recessed handle **LATCHING:** Gravity lift-type multi-point spring loaded latching:

• 3-point latching for openings 48" high and higher,

• 2 point latching for openings 20" high thru 36" high **HOOKS:** 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier and 1-double
- 1 single hook for 9" wide openings 30" and higher


SHELVES: 16 gauge hat for single tier openings 60" and 72" high BOX LOCKERS (Doors 18" high and under):

HANDLE: Single-point thru-the-door finger pull padlock hasp **HOOKS:** None

NOTES: All production KD lockers are supplied without legs unless otherwise specified

SIZES: See Premium KD Chart for standard wardrobe & box lockers

ANTIMICROBIAL UPGRADED Antimicrobial Recessed Handle Finger Lift Cover





Deep drawn stainless steel recessed handle with gravity lift-type latching for doors 20" high and higher

Single Tier,


1 wide,


1 opening


34


PRODUCTION LOCKER ACCESSORIES
















SPECIFICATIONS

- 6" Closed Front Base (KD lockers only): Shall be fabricated of 16 gauge cold rolled sheet steel flanged on all four sides for rigidity. Front bases include projecting tabs on side flanges designed to align with holes in front legs allowing front bases to be snapped into place requiring no additional fasteners. Side bases are to be included at all exposed ends and are bolted to front and rear legs. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 2 4" Continuous Z-Base (KD lockers only): Shall be fabricated from 16 gauge cold rolled sheet steel fabricated in 72" lengths, flanged at the top to form a 1-3/8" toe space and at the bottom allowing concealed fastening to the finished floor. Continuous Front Bases include holes for use with splice plates where bases are joined end-to-end. End Bases are to be included at all exposed ends. Where additional support is desired, End Bases may be substituted for splices at Continuous Front Base joints. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 3 20 gauge Individual Slope Top (KD lockers only): Not less than 20 gauge cold rolled sheet steel, 18 degree pitch, fabricated to be installed individually over each locker. Slope top is formed to include a full back. Individual Slope Tops are to be installed in addition to the locker flat top. End closures are to be provided at exposed ends. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 18 gauge Continuous Slope Top: Not less than 18 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 16 Gauge Continuous Slope Top: Not less than 16 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.
- 5 Recessed Trim: Fabricated of 16 gauge cold rolled sheet steel. 3" wide side trim shall be notched at the top and include a retainer to allow the 3" wide top trim to fit snugly into the side trim. Recess trim is designed to be used when the lockers are installed with the locker fronts flush with the top and side walls. The top and side trim will project 3/8" beyond the side and top walls and include return bends back to the walls. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 6 Minimum Punched End Panel (KD lockers only): Shall be from 18 gauge cold rolled steel and formed to fit tightly over the universal side panel at exposed row ends. Holes are provided at perimeter for fastening to locker. Minimum Punched End Panels are designed to cover all fasteners other than those at the perimeter of the panel. Finish to match lockers. Provide at all exposed ends. Available Quick-Ship from stock in 5 standard colors.
- Obsced End Panel: Shall be "Boxed" type formed from 16 gauge cold rolled steel with 1" O.D. double bends on sides and a single bend at top and bottom with no exposed holes or bolts. If lockers have slope tops, end panels must be formed with slope at top to cover the ends of the slope tops. Finish to match lockers. Provide at all exposed ends.
- 8 Fillers: Provide where indicated, of not less than 16 gauge cold rolled sheet steel, factory fabricated to and finished to match lockers. Available Quick-Ship from stock in 5 standard colors.

Note: visit our website at www.Hallowell-List.com for complete installation details and instructions.







allowe Hallowell-List.com

Padlocks, Built-in Locks & Specialty Locks





Master Lock Co. **Built-In Combination Locks**

Available in spring-bolt and dead-bolt styles, are key controlled and include multiple combination settings.


ADA Compliant Version Available



Master Lock Co. **Built-In Key Locks**

Available in spring-bolt and dead-bolt styles - Available in standard or master-keyed.







0

Master Lock Co. **Combination Padlocks**

Available standard and master-keyed, Master Lock padlocks can be used on all locker types.



LOCKS

ADA Compliant Padlocks Available

Hallowell DIGITECH[™] H1 Locks

Digitech[™] electronic access locks can be programmed for shared or permanent use



ADA Compliant



CALL 866-566-0500 FOR MORE INFORMATION

SAFE-O-MAT® Built-In Coin, Token & Card Locks

Available in coin return and coin collect as well as token collect and card access styles.



Hallowell **DIGITECH[™] GL Locks**

Digitech[™] GL electronic locks are compatible with all Superior[®] gravity lift-type latching lockers. Lock fits nicely in our recessed handle



NOTE: An ADA compliant lock must be used on any locker that is required to meet ADA guidelines.



Hallowell **DIGITECH[™] II RFID Locks**

Digitech RFID electronic access locks can be programmed to work with most current RFID systems



Benches



WHITE NORTHERN HARD WOOD

Locker Benches are 9-1/2" wide x 1-1/4" thick, made from laminated white northern hard wood, and finished with one coat, deep-penetrating hot sealer, and two coats of heavy body, high-impact, hot, hydraulically applied lacquer. Bench tops are standard in one foot increments from 3' thru 12'. Non-standard lengths are available on special order (pedestal requirement will be for next standard size up).

BENCH TOP LENGTH	3' - 8'	9' - 12'	
PEDESTALS REQUIRED	2	3	

Note: Bench top lengths over 12' will be supplied in sections

PHENOLIC

Locker Benches are 9 1/2" x 3/4" Thick phenolic material in choice of 18 standard colors. Available in 1 foot increments from 3' to 12'.

BENCH TOP LENGTH	3' - 5'	6' - 8'	9′ - 12′
PEDESTALS REQUIRED	2	3	4

Pedestal space not to exceed 40" O.C.



Hallowell-List.com



SHOWN WITH 4810 PEDESTALS





4805 Steel Pedestal Fabricated from 10 gauge sheet steel with flanges welded to upright tube. Color: Tan



4825 Stainless Steel Movable Pedestal Fabricated from 16 gauge stainless steel. Includes holes for permanent anchoring to floor. Color: Unpainted



8032 Adjustable Steel 4810 Heavy-Duty Cast Iron Pedestal With cast aluminum base and concealed anchoring to floor. Color: Tan

Pedestal With 6" diameter top and bottom. Provided with three anchoring holes optional permanent at top and bottom. Color: Tan



4820 Aluminum Movable Pedestal Includes holes for anchoring to floor. Color: Tan



Hallowell[®]

PHENOLIC & PLASTIC COLORS FOR PRODUCTION LOCKERS





Colors shown are an approximate printed representation of the actual color and will vary depending on light source. Actual color samples are available upon request. For a more accurate color selection call or e-mail us at info@Hallowell-List.com to request actual color samples. Hallowell reserves the right to make changes to the information, illustrations, products, services, specifications, availability, plans, and terms and conditions associated with this catalog at any time, without notice, and without incurring obligations or liability of any kind.

POWDER COAT COLORS

Enhance your decor with two-tone color combinations, doors one color and frame a second color, AT NO ADDITIONAL COST.



NOTE: All body components of production KD lockers will be painted our standard neutral color, currently 729 Tan (choice of 729 Tan or 725 Dark Gray for HDV body).

LOCKER PREMIUM FINISH UPGRADES ARE AVAILABLE FOR ALL 24 STANDARD COLORS (Additional charges apply)

HAMMERTONE FINISHES

Specially formulated with a unique hammer texture that is tough, highly durable and provides long lasting protection.

Note: Patterns/colors of textures and metallics will vary due to their nature. No touch up available for hammertone finishes.





Our MedSafe™ antimicrobial finishes with Microban® are specially formulated to protect against bacteria, mold, yeast & mildew for up to 20 years! Very beneficial for educational, healthcare, food processing and other hygiene conscious environments.

Colors shown are an approximate printed representation of the actual color and will vary depending on light source. Actual color samples are available upon request. For a more accurate color selection call or e-mail us at info@Hallowell-List.com to request actual color samples. Hallowell reserves the right to make changes to the information, illustrations, products, services, specifications, availability, plans, and terms and conditions associated with this catalog at any time, without notice, and without incurring obligations or liability of any kind.

139

We Stock It You Sell It We Ship It... Fast! It Really Is That Easy



2823 W. ORANGE AVE, APOPKA, FLORIDA 32703

866.566.0500 TEL: 407.464.3611 WWW.HALLOWELL-LIST.COM

©Copyright 2023 Hallowell